




ENGLISH

Datasheet

DC Axial Fan

RS Stock number 619-6668

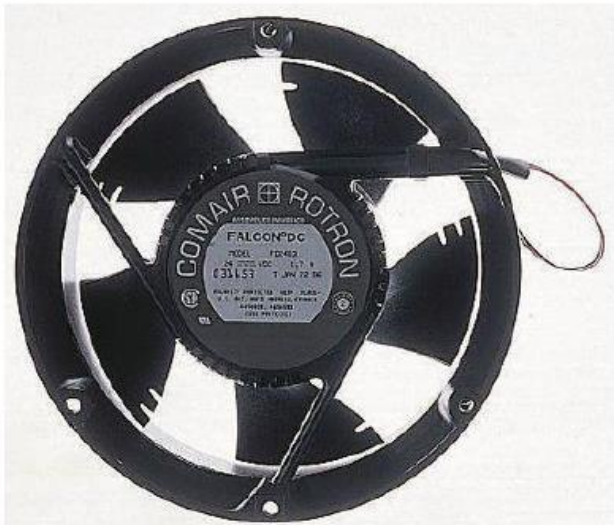

Frame

Diecast Aluminium

Impeller

Glass Reinforced PBT, UL94V-0

Available Options:

Tachometer

Locked Rotor Alarm

PWM Input

Thermal Speed Control

Finger Guard: G172-10HA, G172-10H, \G172-10LN

Plastic Guard: G172P

Aluminium Filter: WMG172M

Filter Kit: GRM172-45

Specifications:

| RS Part Number | Orion Part Number | Speed (RPM) | Airflow (CFM) | Noise (db) | Volts (DC) | Voltage Range | Current (AMPs) | Connection Type |
|----------------|-------------------|-------------|---------------|------------|------------|---------------|----------------|-----------------|
| 6196668 | OD172AP-12HBX | 3300 | 230 | 52 | 12 | 8~14 | 1.90 | Wire |
| 6196680 | OD172AP-24HB | 3300 | 235 | 52 | 24 | 12~28 | 0.97 | Wire |
| 6196674 | OD172AP-24HBX | 3950 | 300 | 57 | 24 | 12~28 | 0.97 | Wire |



ENGLISH

Specifications:

Motor

Brushless DC, impedance and polarity protected, auto restart

Insulation Resistance

Min. 10M ohms at 500V dc

Life Expectancy (L10)

Ball Bearing 60,000 hours

Operating Temperature

-10C ~ +70C

Safety Approvals

UL/CUL, TUV, CE

Dimensions (mm):

