

#### **Key Features & Benefits**

- 450 W (with airflow), 300 W (without airflow)
- 4.0 x 6.5 x 1.6 inch (101.6 x 165.0 x 41.0 mm)
- Universal AC Input
- 5 V s/b and 12 V Fan Outputs Standard
- Side Fan or Top Fan Mounting Option Product
- (-S or -T to be added to model number)
- Current Sharing Option Product
- (-I to be added to model number)
- Conducted EMI EN 55022-B, FCC Part 15 Level B
- ITE Safety Agency Approvals
- RoHS Compliant
- CE Marked LVD

# ABC450 Series AC-DC Open Frame Power Supplies

The ABC450 Series of open-frame power supplies, with its wide universal 90-264 VAC input range and high power density, is available at 450 W of output power and a variety of single and multiple output voltages.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for telecom, datacom, industrial equipment and other applications.

#### **Applications**

- Instrumentation
- Lighting
- Industrial Applications
- Test and Measurement
- Robotics
- Renewable Energy
- Data Comm.
- Applied Computing
- Process Control
- Wireless

North America +1-866.513.2839

**Asia-Pacific** +86.755.29885888

Europe, Middle East +353 61 225 977



#### **Model Selection**

MODEL	OUTPUT VOLTAGE (VDC)	MAX LOAD CONVECTION 1,2,5	MAX LOAD 300 LFM <sup>1,2,5</sup>	MINIMUM LOAD (A)	RIPPLE & NOISE <sup>4</sup>	TOTAL REGULATION
ABC450-1T05G	5	31.0 A	55.0 A	0	2%	± 3.5%
ABC450-1T12G	12	20.83 A	37.5 A	0	2%	± 3.5%
ABC450-1T15G	15	16.66 A	30.0 A	0	2%	± 3.5%
ABC450-1T24G	24	12.30 A	18.75 A	0	2%	± 3.5%
ABC450-1T30G	30	10.0 A	15.0 A	0	2%	± 3.5%
ABC450-1T48G	48	6.25 A	9.37 A	0	2%	± 3.5%
Vfan (all models) <sup>3</sup>	12	0.5 A	0.5 A	0	10%	± 30%
V s/b (all models) <sup>6</sup>	5	1.5 A	2.0 A	0	5%	± 5%

Warranty 2 years.

#### NOTES:

<sup>1</sup> Peak current rating on V1 is 120% of max, lasting < 30 Sec with max of 10% duty cycle.

<sup>2</sup> Combined output power of V1 plus fan supply and standby supply should not exceed max, power rating.

<sup>3</sup> Fan supply output voltage tolerance including set point accuracy, line and load regulation is +/-30% and needs min. 1% load on V1 output to be within regulation band. Ripple and noise is less than 10%.

<sup>4</sup> Ripple is peak to peak with 20MHz bandwidth and 10uF (Tantalum capacitor) in parallel with a 0.1uF ceramic capacitor at rated line voltage and load ranges.

<sup>5</sup> Derate output power linearly to 80% from 90 Vac to 80 Vac input.

<sup>6</sup> Standby output voltage tolerance including set point



### **TECHNICAL PARAMETERS**

Specifications are for nominal input voltage, 25°C and max load unless otherwise stated.

#### **Input Specifications**

PARAMETER	DESCRIPTION / CONDITION	CRITERION
Input Voltage	Universal	90-264 VAC / 120-390 VDC
Input Frequency		47 to 63 Hz
Input Current	120 VAC: 230 VAC:	4.5 A max. 2.3 A max.
No Load Power	120 VAC: 230 VAC:	0.4 W 0.8 W
Inrush Current	120 VAC: 230 VAC:	40 A max. 75 A max.
Input Protection	Dual fusing, in AC Line and AC Neutral	T8A / 250 V
Power Factor	120 VAC 230 VAC	0.98 0.95

### **Output Specifications**

PARAMETER	DESCRIPTION / CONDITION	CRITERION
Output Power	475W for 24V, 30V &500 W for 48V model only for 5 seconds max.	155 to 450 W
Efficiency (Full Load)	24 V, 48 V, 30 V 120 VAC 12 V, 15 V 5 V 230 VAC 24 V, 48 V, 30 V	88% 86% 83% typical 90%
Hold Up Time	120 / 230 VAC	10 ms
Line Regulation		+/-0.5%
Load Regulation		+/-3%
Transient Response	<10%, 50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/ $\mu s$	Recovery time < 5 ms
Rise Time		< 100 ms
Set Point Tolerance		+/-1%
Voltage Adjustment	V1	± 3 %
Over Voltage Protection	Latch Type	>114%
Over Current Protection	Hic-Up type	120 to 150%
Short Circuit Protection	Short term, auto recovery	
Over Temperature Protection	Automatic recovery	130°C primary heat sink
Current Share	Up to 2 supplies connected in parallel (optional)	



### **Other Specifications**

PARAMETER	DESCRIPTION / CONDITION	CRITERION
Isolation Voltage	Input to Output Input to Earth	4242 VDC 2121 VDC
Switching Frequency	PFC converter: Variable Resonant converter: Variable	45-160 kHz typical 35-250 kHz, 90 kHz typical
Reliability	MTBF according to Telcordia -SR332-Issue 3	1.28 million hours
Operating Temperature	Refer to derating curve Start-up is guaranteed	0 to +70°C -20 to 0°C
Storage Temperature		-40 to 85° C
	5 V model	Convection: 155 W 420 LFM: 275 W
Cooling	12 V & 15 V models	Convection: 250 W 420 LFM: 450 W
	24 V, 30 V & 48 V models	Convection: 300 W 420 LFM: 450 W

#### **Environmental**

PARAMETER	DESCRIPTION / CONDITION	CRITERION
Conducted Emissions:	EN55022-B, CISPR22-B, FCC PART15-B	
Radiated Emissions	EN55022-B, CISPR22-B, FCC PART15-B	To be controlled in end system
Static Discharge	EN61000-4-2	Level 3
RF Field Susceptibility	EN61000-4-3	Level 3
Fast Transients/Bursts	EN61000-4-4	Level 3
Surge Susceptibility	EN61000-4-5	Level 3
Harmonic Current	EN61000-3-2	Class D
Humidity	Non Condensing	95% HR
Altitude	Operating: Non-Operating:	10,000 ft. 40,000 ft.

#### **Safety Approvals**


PARAMETER	DESCRIPTION / CONDITION
Agency Approvals	Approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1
CE mark	Complies with LVD Directive

### Signals

PARAMETER	DESCRIPTION / CONDITION
Power Good Signal	TTL signal goes high after main output is within regulation band, delay is 0.1 to 0.3 s
Remote Sense	Compensates for 200 mV drop
Remote on/off	To turn on PSU short remote pin to ground





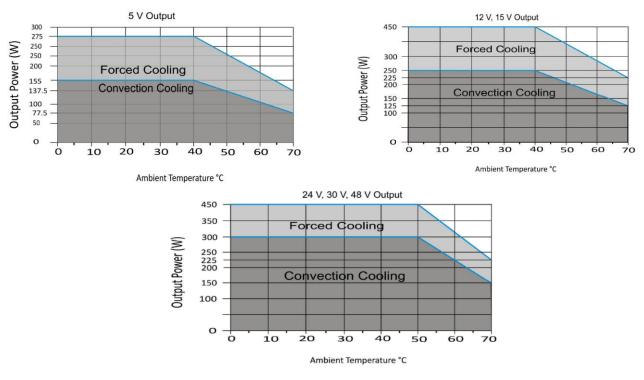

#### **Connector & Pin Description**

CONNECTOR	PIN	DESC	RIPTION / CONDITION	MANUFACTURER / PN
AC Input Connector*	J1	Pin 1 Pin 3 Pin 5	AC line AC neutral Earth	Tyco: 1-1123724-3 Mating: 1-1123722-5
DC Output Connector	J2	Lug 1 Lug 2	+V1 RTN	6-32 inches Screw Pan HD Mating: 16 AWG wire crimped to Ring Tongue Terminal AMP: 8-31886-1
Signals	J3	Pin 1 Pin 2 Pin 3 Pin 4 Pin 5 Pin 6 Pin 7 Pin 8 Pin 9 Pin 10	NC Power Fail Power Good DC Return +5Vstby +VE Remote Sense -VE Remote Sense CS DC Return Remote On/Off	Molex: 22-23-2081 Mating: 22-01-2087; Pins: 08-50-0113
Fan	J4	Pin 1 Pin 2	+VE -VE	Mating Connector: Molex 22-01-2025 Pins = 08-50-0113
Earth	J5			Molex: 19705-4301 Mating: 190030001


\* 5 position connector with pins 2 and 4 removed.

#### **Mechanical**

PARAMETER	DESCRIPTION/CONDITION
Weight	900 g (1.98 lbs)
Dimensions	101.6 x 165.0 x 41.0 mm (4.0 x 6.5 x 1.6 inch)



Figure 2 - Mechanical Drawing (Without Fan Mounting)

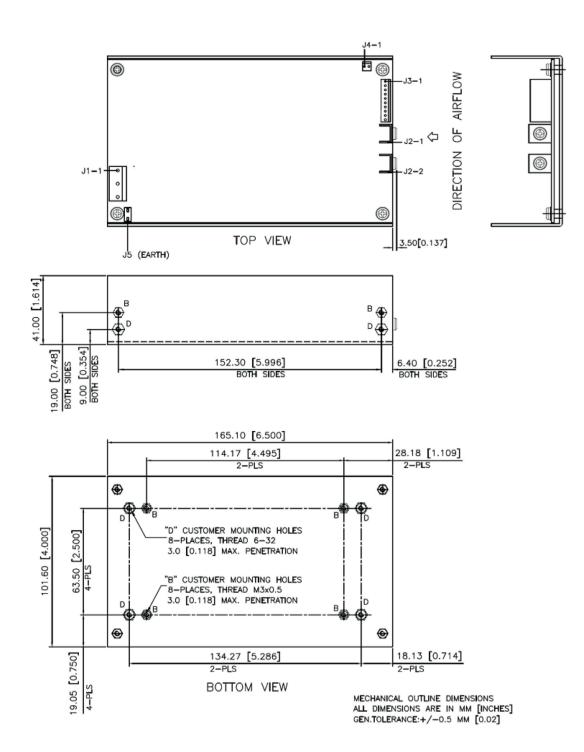

bel power solutions & rotection

Figure 3 - Mechanical Drawing (With Top Fan Mounting)


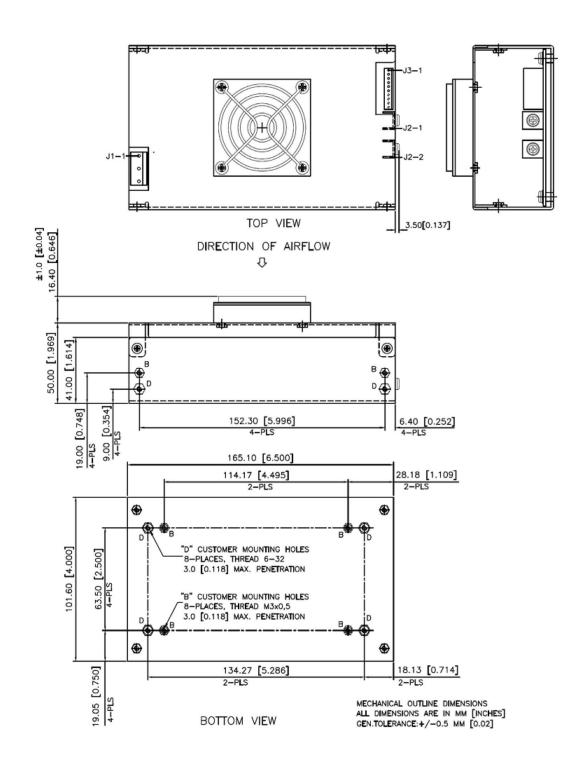




Figure 4 - Mechanical Drawing (With Side Fan Mounting)



**NOTE:** Air flow over long edge (either direction) required for air flow rating.

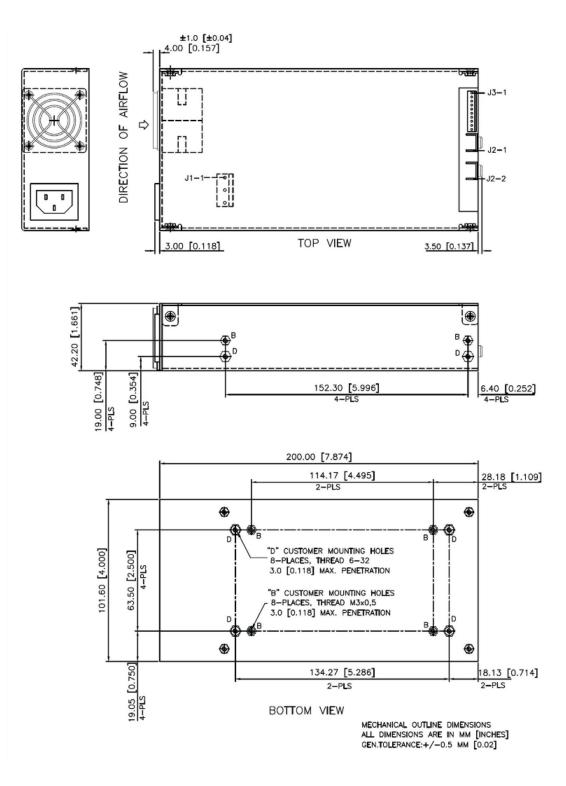

#### Installation Instruction for Current Sharing

During the installation and setup of parallel supplies in a system it is important that a single remote sense point be used for all the supplies.

The remote sense voltage between the supplies must be adjusted to within 2% to ensure the supplies are inside the 3% capture window.


If the supplies are not initially adjusted inside the capture window the supplies will not current share.

#### NOTE:

"CURRENT SHARING " facility is inclusive with the unit only with ordering of the " CURRENT SHARING " option unit i.e. ABC450-1XXX-I or MBC450-1XXX-I.

#### Set-Up Procedure:

- 1. Connect load cables to the outputs of each supply.
- 2. Connect the remote sense lines to the load in twisted style. (A common remote sense point must be used for all the supplies in parallel).
- 3. Connect all the "current share" pins on the J3 connector between the supplies.
- 4. Adjust remote sense voltage of each supply to within 1% of rated output voltage or readjust to required set point. (Adjustment to be done with all other parallel supplies off).
- 5. Current sharing between the supplies can be verified by monitoring the output current of each supply with a hall effect DC current probe. The supplies should share to within 10% of the total load current.



#### CURRENT SHARING BLOCK DIAGRAM

#### For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

