


RK46C VarOS

Retro-reflective photoelectric sensors


en 03-2018/01 50125880-01



0.4 ... 5.2m

- Sensor with homogeneous light-band (red light) for reliable detection of objects with different sizes and shapes
- Teachable, preset sensitivity levels for time-saving, optimum adaptation to object size, shape and form
- *Easy tune* – calibration of the sensor to e.g. transparent, perforated or small objects
- Precise alignment thanks to the special shape and form of the light-band
- Reliable detection even with depolarizing media (e.g. foil packaging)
- Light/dark switching via the teach button

We reserve the right to make changes • PAL\_RK46CDXL3\_en\_50125880\_01.fm




**Accessories:**

(available separately)


- Mounting systems (BT 46, BTU 300M, BTU 900M)
- M12 connectors (KD ...)
- Ready-made cables (KD ...)
- Reflectors

**Dimensioned drawing**

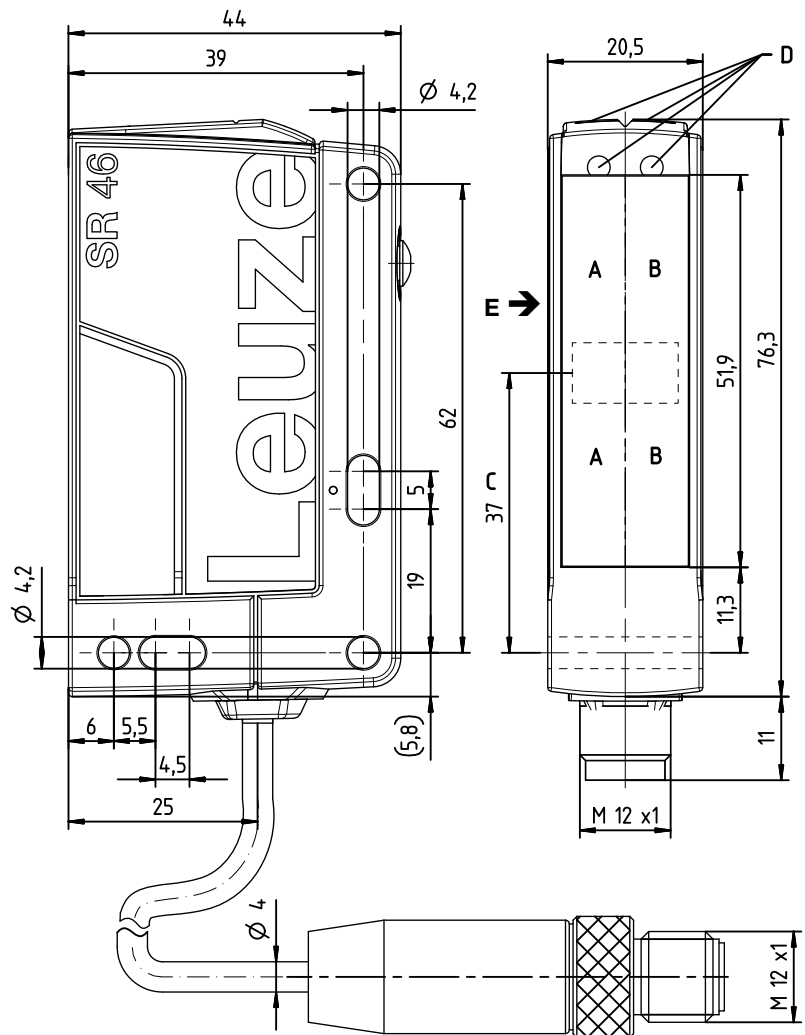

- A** Transmitter side
- B** Receiver side
- C** Center of light-band
- D<sub>A</sub>** Green indicator diode
- D<sub>B</sub>** Yellow indicator diode
- E** Preferred entry direction for precise positioning

**Electrical connection**

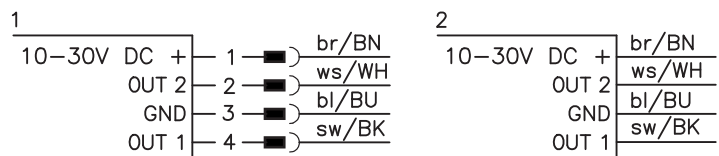

**Technical data**

**Optical data**

|  |  |
|--|--|
| Typ. op. range limit (TK(S) 100x100) <sup>1)</sup> | 0.4 ... 5.2m                               |
| Operating ranges <sup>2)</sup>                     | See tables                                 |
| Light source <sup>3)</sup>                         | LED (modulated light)                      |
| Wavelength   | 620nm (visible red light)                  |
| Detection range                                    | Light-band approx. 50mm (see diagrams)     |
| Resolution   | Typ. 12mm (max. approx. 8mm) <sup>4)</sup> |

**Timing**

|                     |         |
|---------------------|---------|
| Switching frequency | 250 Hz  |
| Response time       | 2ms     |
| Readiness delay     | < 300ms |

**Electrical data**

|                                  |   |
|----------------------------------|---|
| Operating voltage U <sub>B</sub> | 10 ... 30VDC (incl. residual ripple)        |
| Residual ripple                  | ≤ 15% of U <sub>B</sub>                     |
| Open-circuit current             | ≤ 20mA                                      |
| Switching outputs/functions      | /4P 2 PNP switching outputs, antivalent     |
|                                  | /4X 1 PNP switching output, light switching |
|                                  | /PX 1 PNP switching output, dark switching  |
|                                  | /2N 2 NPN switching outputs, antivalent     |
|                                  | ≥ (U <sub>B</sub> -2V)/≤ 2V                 |
| Signal voltage high/low          | Max. 100mA                                  |
| Output current                   | Adjustment via teach button                 |
| Sensitivity                      |   |

**Indicators**

|                            |                                 |
|----------------------------|---------------------------------|
| Green LED                  | Ready                           |
| Yellow LED                 | Light path free                 |
| Flashing green/yellow LEDs | Feedback during teach procedure |

**Mechanical data**

|                 |   |
|-----------------|---|
| Housing         | Plastic (PC-PBT)                                |
| Connector       | Plastic (PBT)                                   |
| Optics          | Plastic (PMMA)                                  |
| Operation       | Teach button                                    |
| Weight          | With M12 connector: approx. 60g                 |
|                 | With 200mm cable and M12 connector: approx. 80g |
|                 | With 2000mm cable: approx. 100g                 |
| Connection type | M12 connector, 4-pin                            |
|                 | Cable 200mm with M12 connector, 4-pin           |
|                 | Cable 2000mm, 4 x 0.20mm <sup>2</sup>           |

**Environmental data**

|                                    |                                      |
|------------------------------------|--------------------------------------|
| Ambient temp. (operation/storage)  | -40°C ... +60°C/-40°C ... +70°C      |
| Protective circuit <sup>5)</sup>   | 2, 3                                 |
| VDE protection class <sup>6)</sup> | III                                  |
| Degree of protection               | IP67, IP 69K                         |
| Light source                       | Exempt group (in acc. with EN 62471) |
| Standards applied                  | IEC 60947-5-2                        |
| Chemical resistance                | Tested in accordance with ECOLAB     |

- 1) Typ. operating range limit: max. attainable range without function reserve
- 2) Operating range: recommended range with function reserve
- 3) Average life expectancy 100,000h at an ambient temperature of 25°C
- 4) Depends on teach-in, see diagrams (sensitivity **increased** ≤ 12 mm)
- 5) 2=polarity reversal protection, 3=short circuit protection for all transistor outputs
- 6) Rating voltage 50V

**Notes**

- Function reserve decreases as sensitivity increases.
- Max. resolution: approx. 8mm.
- Further applications:
  - Detection of transparent media
  - Detection of depolarizing media, e.g. foil packaging
  - Use as muting sensor
- Multiple sensors can be operated in a small area

**Tables**

**Plastic reflectors:**


| Reflectors      | Operating range |
|-----------------|-----------------|
| 1 TK(S) 100x100 | 0.4 ... 4.0m    |
| 2 TK(S) 40x60   | 0.4 ... 3.0m    |

|   |     |     |     |
|---|-----|-----|-----|
| 1 | 0.4 | 4.0 | 5.2 |
| 2 | 0.4 | 3.0 | 3.9 |


- Operating range [m]
- Typ. operating range limit [m]

TK ... = adhesive  
TKS ... = screw type

**Diagrams**



Reference object for detection: 19mm with reflector TKS 100x100



Reference object for detection: 12mm with reflector TKS 40x60

- A Standard** sensitivity
- B Increased** sensitivity
- C Further increased** sensitivity with **Easy tune** (range depends on taught value)

**Notes**

**Observe intended use!**

- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with its intended use.

**RK46C VarOS**

**Retro-reflective photoelectric sensors**

**Part number code**

R K 4 6 C . D X L 3 / 4 P - M 1 2

**Operating principle**

**RK** Retro-reflective photoelectric sensor

**Series**

**46C** 46C series

**Equipment**

**D** Depolarizing media

**Optical characteristic**

**XL** Large light spot

**Setting**

**3** Teach button

**Pin assignment of OUT1 (connector pin 4 / black cable wire)**

**2** NPN, light switching

**N** NPN, dark switching

**4** PNP, light switching

**P** PNP, dark switching

**Pin assignment of OUT2 (connector pin 2 / white cable wire)**

**X** Not assigned

**2** NPN, light switching

**N** NPN, dark switching

**4** PNP, light switching

**P** PNP, dark switching

**Connection technology**

**M12** M12 connector, 4-pin

**200-M12** Cable 200mm with M12 connector, 4-pin

**Free** Cable 2000mm

**Order guide**

The sensors listed here are preferred types; current information at [www.leuze.com](http://www.leuze.com).


|   |   | <b>Designation</b>    | <b>Part no.</b> |
|---|---|-----------------------|-----------------|
| <b>With M12 connector, 4-pin</b>                  | OUT1: PNP light switching, OUT2: PNP dark switching | RK46C.DXL3/4P-M12     | 50125752        |
|   | OUT1: PNP dark switching, OUT2: not connected       | RK46C.DXL3/PX-M12     | 50125991        |
|   | OUT1: NPN light switching, OUT2: NPN dark switching | RK46C.DXL3/2N-M12     | 50126764        |
| <b>With 200 mm cable and M12 connector, 4-pin</b> | OUT1: PNP light switching, OUT2: PNP dark switching | RK46C.DXL3/4P-200-M12 | 50125755        |
| <b>With cable, cable length 2m</b>                | OUT1: PNP light switching, OUT2: PNP dark switching | RK46C.DXL3/4P         | 50125754        |

**Precise alignment of sensor**

The special shape and form of the light-band allows precise alignment of the sensor with the object to be detected or with the reflector.

**Advantages:**

- Maximum utilization of the light-band
- Reliable detection even with shocks/vibrations



Align center of light-band with center of object/reflector!



Reliable detection of different objects and objects with cutouts and openings, here commissioned merchandise:

- Shrink-wrapped packages (film)
- Gaps between packaging units
- Irregular stacks



## Teach procedure for sensor



**Note**


It is essential to teach the sensor before it is used for the first time!  
The sensor is factory-set to the maximum operating range.

Before starting the teach procedure, align the light-band of the sensor with the center of the object and reflector!
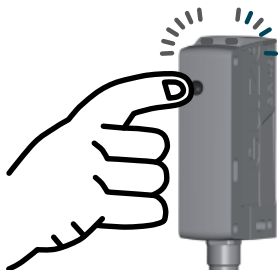
|                     | Teach  |   |
|---------------------|--|---|
| Sensor sensitivity  | Standard   | Increased   |
| Switching behavior  | Sensor switches when 28 % of light-band is covered by object.  | Sensor switches when 18 % of light-band is covered by object.   |
| Typical application | Reliable detection of transport material   | Detection of containers with openings / transparent objects   |
| Setting             | <p><b>Clear light path to reflector!</b></p> <p><b>Press teach button (2 to 7s) until both LEDs (green/yellow) flash synchronously.</b></p> <p>Release teach button – ready.</p>  | <p><b>Clear light path to reflector!</b></p> <p><b>Press teach button (7 to 12s) until both LEDs (green/yellow) flash alternately.</b></p> <p>Release teach button – ready.</p>  |
| Acknowledgment      | Teach successful: Both LEDs (green/yellow) remain lit.   |   |
|                     | Teach not successful: Yellow LED flashes. Repeat teach procedure.  |   |


## Easy tune – Fine adjustment of sensor sensitivity (switching threshold)

Easy tune allows you to adjust the sensor sensitivity in small steps using the teach button during normal operation.

|  |   |   |
|--|---|---|
| <b>Increase sensitivity (reduce switching threshold)</b> | <b>Briefly press teach button (2 to 200ms),</b> sensitivity is increased slightly and switching threshold is reduced slightly.    | <p>The sensor <b>confirms button actuation</b> by brief illumination (1x flash) of both LEDs.</p>  |
| <b>Reduce sensitivity (increase switching threshold)</b> | <b>Press and hold teach button (200 ms to 2s),</b> sensitivity is reduced slightly and switching threshold is increased slightly. |   |

If the upper or lower end of the adjustment range is reached, both LEDs flash at a much higher frequency.

## Light/dark switching – Adjustment of switching behavior of switching outputs
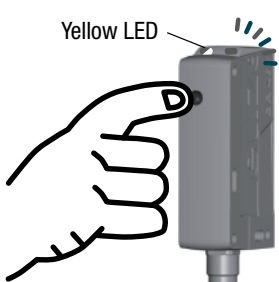
|                             |   |
|-----------------------------|---|
| <b>Light/dark switching</b> | <p><b>Press teach button (&gt; 12s) until green LED flashes.</b></p> <p>The <b>yellow LED</b> indicates the <b>current setting of the switching outputs</b><sup>1)</sup>:</p> <p><b>ON =</b> Output OUT1 <b>light switching</b><br/>Output OUT2 <b>dark switching</b></p> <p><b>OFF =</b> Output OUT1 <b>dark switching</b><br/>Output OUT2 <b>light switching</b></p> <p>Release teach button – switchover is complete.</p> <p><sup>1)</sup>For factory settings, see part number code</p>  |
|-----------------------------|---|