



## Datasheet

### RS PRO Black Cable Tie

**Stock No. 811-1482 811-1486 811-1495 811-1498 811-1518 811-1505  
811-1511 811-1509 811-1492 811-1502 811-1515 811-1524 811-1527**

EN




#### SPECIFICATION

- Material: UL approved Nylon 66(UV RESISTANT BLACK), 94V-2, with good tensile strength and insulation, not easy to get aging.
- Color: black
- Carbon black was added for greater resistance to ultra violet in outdoor usage.

#### Feature

- Low Smoke and Halogen Free cable tie suitable for various industry, also household DIY and gardening.

- Operating temperature is based on UL Nonmetallic Cable Ties (all colors) Investigated to ANSI/UL 62275 -40°C to 85°C.
- Prolong useful life of cable tie under sunshine/outdoor application.
- Application: One piece self-lock cable tie save the time and make effective for installation
- UV resistant cable tie: for outdoor use with UV feature.

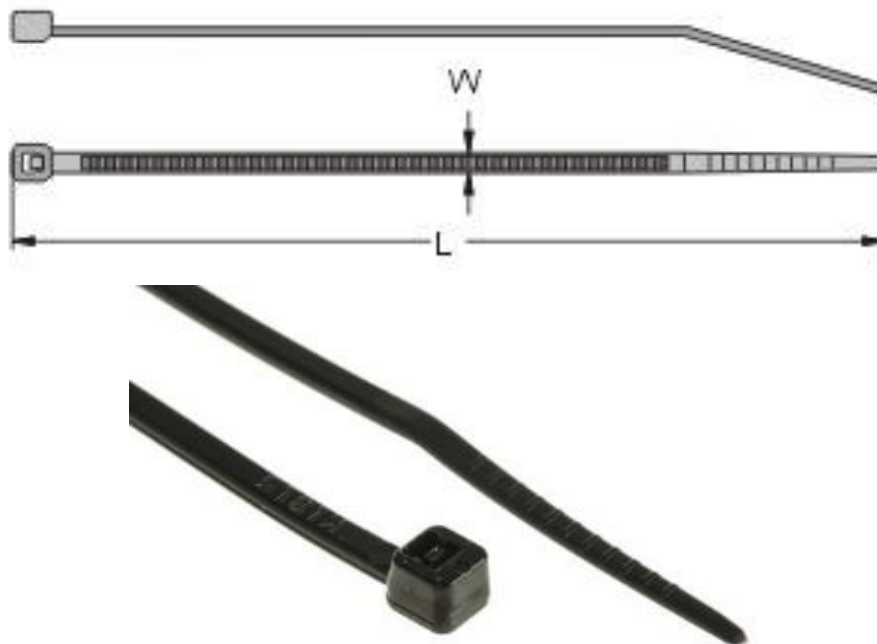

Unit : mm

Item No.	Length L		Width W	Max. Bundle Dia.	Min Loop Tensile Strength		packing
	mm	inch			lbs	kgs	
8111482	100	4"	2.5	22	18	8	100PC/BG
8111486	142	5 1/2"	3.2	34	40	18	
8111495	190	7 1/2"	4.8	49	50	22	
8111498	203	8"	4.6	52	50	22	
8111518	240	9 7/16"	7.6	61	120	55	
8111505	300	11 7/8"	4.8	83	50	22	
8111511	300	11 7/8"	7.6	80	120	55	
8111509	380	15"	7.6	105	120	55	
8111492	385	15 3/16"	4.8	110	50	22	
8111502	450	17 3/4"	4.8	131	50	22	
8111515	450	17 3/4"	8	128	120	55	
8111524	610	24"	9	177	175	80	
8111527	750	29 1/2"	7.5	223	120	55	