



Datasheet
186-4628
RSPRO-IL17R



Rechargeable Inspection Light

 **700**
LUMENS


 **175** Lumen
Torch

 **2** Brightness
Settings

 **180°** Adjustable
Handle

 Dual Magnets
Base & Back

 1m Micro-USB Cable
and Charging
Station Included

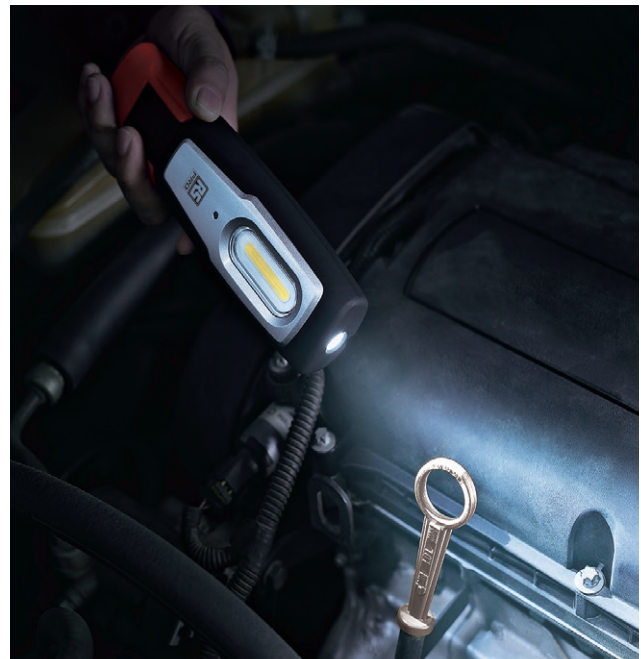

Technical Data

Floodlight - 700 Lumen White COB LED
Flashlight - 175 Lumen White SMD LED
High impact ABS and Rubber housing with PC lens
180° Adjustable/Folding handle
Super strong dual magnets
Rotating nylon hanging hook
80+ CRI
LED Colour Temperature 6500k
IP54 dust & water resistant
IK07 shock proof
Dual charging - micro-USB or charging base

Operating Temperature: -10° to +40°

Product Size: 190 x 33.6 x 56mm

Product Weight: 210g

Battery: Rechargeable high quality 3.7v 2600mAh Li-ion

Charger: 1m Micro-USB cable and magnetic Charging station (Included)

Charging time: approx 4 hours

LED charging indicator: Red-Charging, Green-Fully charged

Runtimes

Flashlight: 175 lumen - 10hrs

Floodlight: 350 lumen - 4hrs 25mins

700 lumen - 1hrs 40mins

Operation

Press the Switch on the back of the Light

Switch Sequence: Flashlight > Floodlight Low > Floodlight High > Off

ADVICE & IMPORTANT INFORMATION!

- Do not look directly at the LED.
- Do not operate in direct sunlight or extreme temperature conditions (below -10°C or above 40°C).
- The LED will become hot when switched on; do not touch and do not place face down on any surface – risk of fire!
- Do not use the device if there is any visible damage to the housing, charge base, plug or cable.
- Do not use the lamp in the immediate vicinity of flammable materials or gases.
- Children under 12 years of age should only use the product under adult supervision.
- Before cleaning the lamp, disconnect the charge cable or remove from charge base. Clean with a dry or slightly moist, clean, lint-free cloth and a mild detergent if required. Do not use cleaners that contain abrasives or solvents.
- Do not open, disassemble or attempt to modify the product; this will void the warranty and can be dangerous.
- Improper use or modification is not covered under the warranty.
- Ensure the lens does come into contact with hard/sharp objects; damage to the lens may affect light output.
- To maintain rechargeable batteries, distributors should recharge the battery every 6 months and users should recharge every 3 months if not using for an extended period.
- Fully charge the product before storage.
- The rechargeable battery will reach optimum performance only after several complete charging and discharging cycles.
- Protect the battery from heat, intense sunlight, fire, water and moisture – danger of explosion!
- If the battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact happens, rinse thoroughly with water. If irritation persists, seek medical advice. Also seek immediate medical assistance if battery fluid comes into contact with the eyes.
- Do not dispose of this device in normal household waste. It must be disposed of via an authorised disposal centre or at your local waste disposal unit.
- Please recycle packaging where possible. Keep these instructions for future reference or for subsequent possessors.

