

Overload relay 12.5...50 A Electronic For motor protection Size S2,  
Class 20E Contactor mounting Main circuit: Screw Auxiliary circuit:  
Screw Manual-Automatic-Reset



|                                                                                |                            |
|--------------------------------------------------------------------------------|----------------------------|
| Product brand name                                                             | SIRIUS                     |
| Product designation                                                            | solid-state overload relay |
| Product type designation                                                       | 3RB3                       |
| General technical data                                                         |                            |
| Size of overload relay                                                         | S2                         |
| Size of contactor can be combined company-specific                             | S2                         |
| Power loss [W] for rated value of the current                                  |                            |
| • at AC in hot operating state                                                 | 1.8 W                      |
| • at AC in hot operating state per pole                                        | 0.6 W                      |
| Insulation voltage with degree of pollution 3 at AC rated value                | 690 V                      |
| Surge voltage resistance rated value                                           | 6 kV                       |
| maximum permissible voltage for safe isolation                                 |                            |
| • in networks with grounded star point between auxiliary and auxiliary circuit | 300 V                      |
| • in networks with grounded star point between auxiliary and auxiliary circuit | 300 V                      |
| • in networks with grounded star point between main and auxiliary circuit      | 600 V                      |

|                                                                                                                           |                                                                          |
|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul> | 690 V                                                                    |
| <b>Protection class IP</b>                                                                                                |                                                                          |
| <ul style="list-style-type: none"> <li>on the front</li> </ul>                                                            | IP20                                                                     |
| <ul style="list-style-type: none"> <li>of the terminal</li> </ul>                                                         | IP00                                                                     |
| <b>Shock resistance</b>                                                                                                   | 15g / 11 ms                                                              |
| <ul style="list-style-type: none"> <li>acc. to IEC 60068-2-27</li> </ul>                                                  | 15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms |
| <b>Vibration resistance</b>                                                                                               | 1-6 Hz, 15 mm; 6-500 Hz, 20 m/s <sup>2</sup> ; 10 cycles                 |
| <b>Thermal current</b>                                                                                                    | 50 A                                                                     |
| <b>Recovery time</b>                                                                                                      |                                                                          |
| <ul style="list-style-type: none"> <li>after overload trip with automatic reset typical</li> </ul>                        | 3 min                                                                    |
| <ul style="list-style-type: none"> <li>after overload trip with remote-reset</li> </ul>                                   | 0 min                                                                    |
| <ul style="list-style-type: none"> <li>after overload trip with manual reset</li> </ul>                                   | 0 min                                                                    |
| <b>Type of protection according to ATEX directive 2014/34/EU</b>                                                          | Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]            |
| Certificate of suitability according to ATEX directive 2014/34/EU                                                         | PTB 09 ATEX 3001                                                         |
| <b>Reference code acc. to DIN EN 81346-2</b>                                                                              | F                                                                        |

#### Ambient conditions

|                                                                    |                |
|--------------------------------------------------------------------|----------------|
| <b>Installation altitude at height above sea level</b>             |                |
| <ul style="list-style-type: none"> <li>maximum</li> </ul>          | 2 000 m        |
| <b>Ambient temperature</b>                                         |                |
| <ul style="list-style-type: none"> <li>during operation</li> </ul> | -25 ... +60 °C |
| <ul style="list-style-type: none"> <li>during storage</li> </ul>   | -40 ... +80 °C |
| <ul style="list-style-type: none"> <li>during transport</li> </ul> | -40 ... +80 °C |
| <b>Temperature compensation</b>                                    | -25 ... +60 °C |
| Relative humidity during operation                                 | 10 ... 95 %    |

#### Main circuit

|                                                                                            |               |
|--------------------------------------------------------------------------------------------|---------------|
| <b>Number of poles for main current circuit</b>                                            | 3             |
| <b>Adjustable pick-up value current of the current-dependent overload release</b>          | 12.5 ... 50 A |
| <b>Operating voltage</b>                                                                   |               |
| <ul style="list-style-type: none"> <li>rated value</li> </ul>                              | 690 V         |
| <ul style="list-style-type: none"> <li>at AC-3 rated value maximum</li> </ul>              | 690 V         |
| <b>Operating frequency rated value</b>                                                     | 50 ... 60 Hz  |
| <b>Operating current rated value</b>                                                       | 50 A          |
| <b>Operating power</b>                                                                     |               |
| <ul style="list-style-type: none"> <li>for three-phase motors at 400 V at 50 Hz</li> </ul> | 7.5 ... 22 kW |
| <ul style="list-style-type: none"> <li>for AC motors at 500 V at 50 Hz</li> </ul>          | 11 ... 30 kW  |
| <ul style="list-style-type: none"> <li>for AC motors at 690 V at 50 Hz</li> </ul>          | 11 ... 45 kW  |

#### Auxiliary circuit

|                                                                                                                              |                                           |
|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <b>Design of the auxiliary switch</b>                                                                                        | integrated                                |
| <b>Number of NC contacts for auxiliary contacts</b><br>• Note                                                                | 1<br>for contactor disconnection          |
| <b>Number of NO contacts for auxiliary contacts</b><br>• Note                                                                | 1<br>for message "tripped"                |
| <b>Number of CO contacts</b><br>• for auxiliary contacts                                                                     | 0                                         |
| <b>Operating current of auxiliary contacts at AC-15</b><br>• at 24 V<br>• at 110 V<br>• at 120 V<br>• at 125 V<br>• at 230 V | 4 A<br>4 A<br>4 A<br>4 A<br>3 A           |
| <b>Operating current of auxiliary contacts at DC-13</b><br>• at 24 V<br>• at 60 V<br>• at 110 V<br>• at 125 V<br>• at 220 V  | 2 A<br>0.55 A<br>0.3 A<br>0.3 A<br>0.11 A |

#### Protective and monitoring functions

|                                       |            |
|---------------------------------------|------------|
| <b>Trip class</b>                     | CLASS 20E  |
| <b>Design of the overload release</b> | electronic |

#### UL/CSA ratings

|                                                                                                             |              |
|-------------------------------------------------------------------------------------------------------------|--------------|
| <b>Full-load current (FLA) for three-phase AC motor</b><br>• at 480 V rated value<br>• at 600 V rated value | 50 A<br>50 A |
| <b>Contact rating of auxiliary contacts according to UL</b>                                                 | B600 / R300  |

#### Short-circuit protection

|                                                                                                                                                                                                                                           |                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Design of the fuse link</b><br>• for short-circuit protection of the main circuit<br>— with type of coordination 1 required<br>— with type of assignment 2 required<br>• for short-circuit protection of the auxiliary switch required | gG: 250 A<br>gG: 200 A<br>fuse gG: 6 A |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|

#### Installation/ mounting/ dimensions

|                          |                    |
|--------------------------|--------------------|
| <b>Mounting position</b> | any                |
| <b>Mounting type</b>     | Contactor mounting |
| <b>Height</b>            | 99 mm              |
| <b>Width</b>             | 55 mm              |
| <b>Depth</b>             | 104 mm             |

## Connections/ Terminals

|                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product function</b> <ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>                                                                                                                                                                                                              | Yes                                                                                                                                                                                                                                                                                          |
| <b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> </ul>                                                                                                                                                                          | screw-type terminals<br>screw-type terminals                                                                                                                                                                                                                                                 |
| <b>Arrangement of electrical connectors for main current circuit</b>                                                                                                                                                                                                                                                                        | Top and bottom                                                                                                                                                                                                                                                                               |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— stranded</li> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>at AWG conductors for main contacts</li> </ul> | 1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> )<br>2x (10 ... 35 mm <sup>2</sup> ), 1x 50 mm <sup>2</sup><br>1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> )<br>1x (1 ... 35 mm <sup>2</sup> ), 2x (1 ... 25 mm <sup>2</sup> )<br>2x (18 ... 2), 1x (18 ... 1) |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>at AWG conductors for auxiliary contacts</li> </ul>           | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 2,5 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>1x (20 ... 14), 2x (20 ... 14)                                           |
| <b>Tightening torque</b> <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary contacts with screw-type terminals</li> </ul>                                                                                                                                                            | 3 ... 4.5 N·m<br>0.8 ... 1.2 N·m                                                                                                                                                                                                                                                             |
| <b>Design of screwdriver shaft</b>                                                                                                                                                                                                                                                                                                          | Diameter 5 to 6 mm                                                                                                                                                                                                                                                                           |
| <b>Size of the screwdriver tip</b>                                                                                                                                                                                                                                                                                                          | Pozidriv PZ 2                                                                                                                                                                                                                                                                                |
| <b>Design of the thread of the connection screw</b> <ul style="list-style-type: none"> <li>for main contacts</li> <li>of the auxiliary and control contacts</li> </ul>                                                                                                                                                                      | M6<br>M3                                                                                                                                                                                                                                                                                     |

## Communication/ Protocol

|                                                            |    |
|------------------------------------------------------------|----|
| <b>Type of voltage supply via input/output link master</b> | No |
|------------------------------------------------------------|----|

## Electromagnetic compatibility

|                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Conducted interference</b> <ul style="list-style-type: none"> <li>due to burst acc. to IEC 61000-4-4</li> <li>due to conductor-earth surge acc. to IEC 61000-4-5</li> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> <li>due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul> | 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3<br>2 kV (line to earth) corresponds to degree of severity 3<br>1 kV (line to line) corresponds to degree of severity 3<br>10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                                      |                                             |
|------------------------------------------------------|---------------------------------------------|
| Field-bound parasitic coupling acc. to IEC 61000-4-3 | 10 V/m                                      |
| Electrostatic discharge acc. to IEC 61000-4-2        | 6 kV contact discharge / 8 kV air discharge |

## Display

### Display version

- for switching status

Slide switch

## Certificates/ approvals

|                          |     |                                |
|--------------------------|-----|--------------------------------|
| General Product Approval | EMC | For use in hazardous locations |
|--------------------------|-----|--------------------------------|



CCC



CSA



UL



RCM



ATEX

|                           |                   |                   |
|---------------------------|-------------------|-------------------|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|



EG-Konf.

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



ABS



LRS

|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



PRS



RINA



RMRS



DNVGL.COM/AF

[Confirmation](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3036-2UB0>

### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3036-2UB0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-2UB0>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB3036-2UB0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3036-2UB0&lang=en)


### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-2UB0/char>

### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3036-2UB0&objecttype=14&gridview=view1>

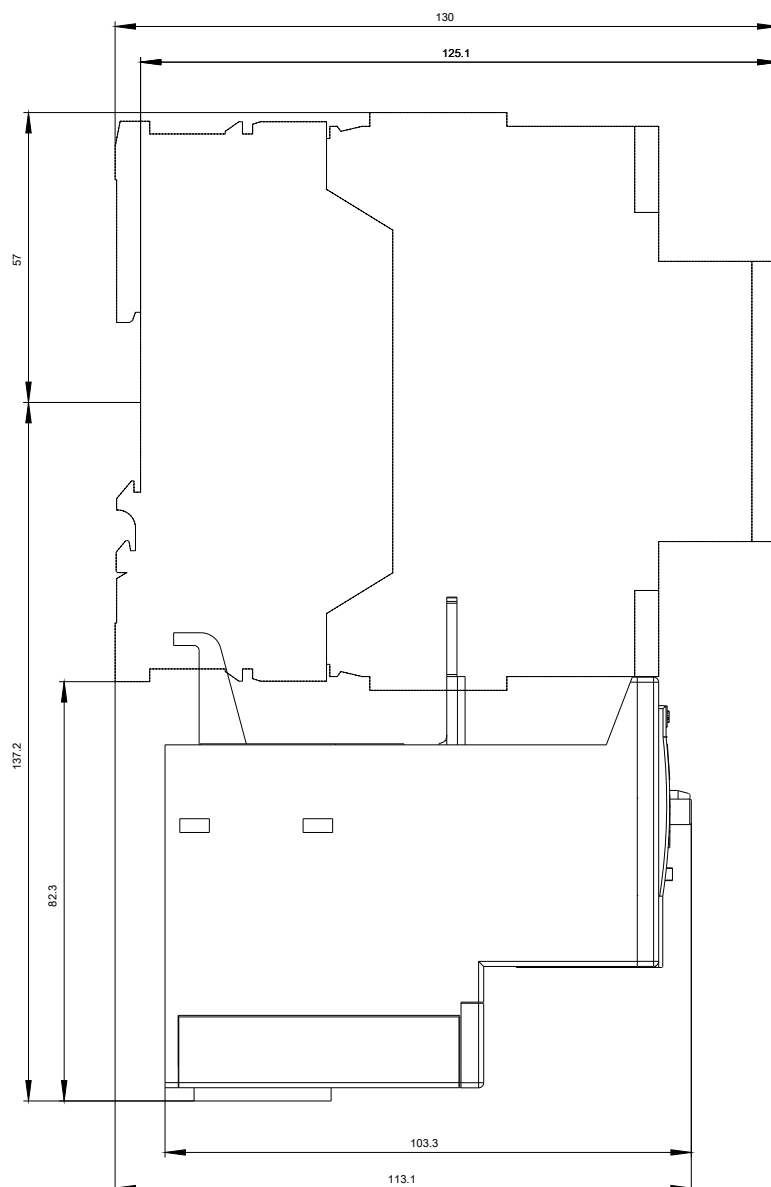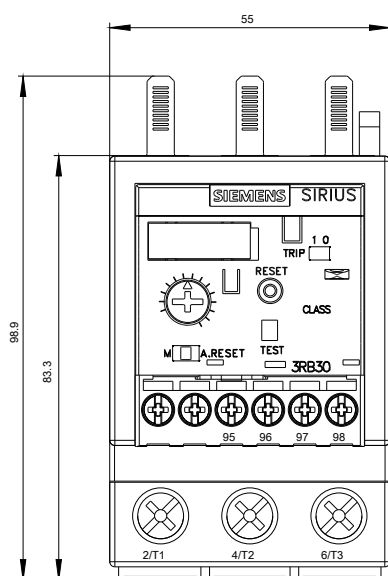

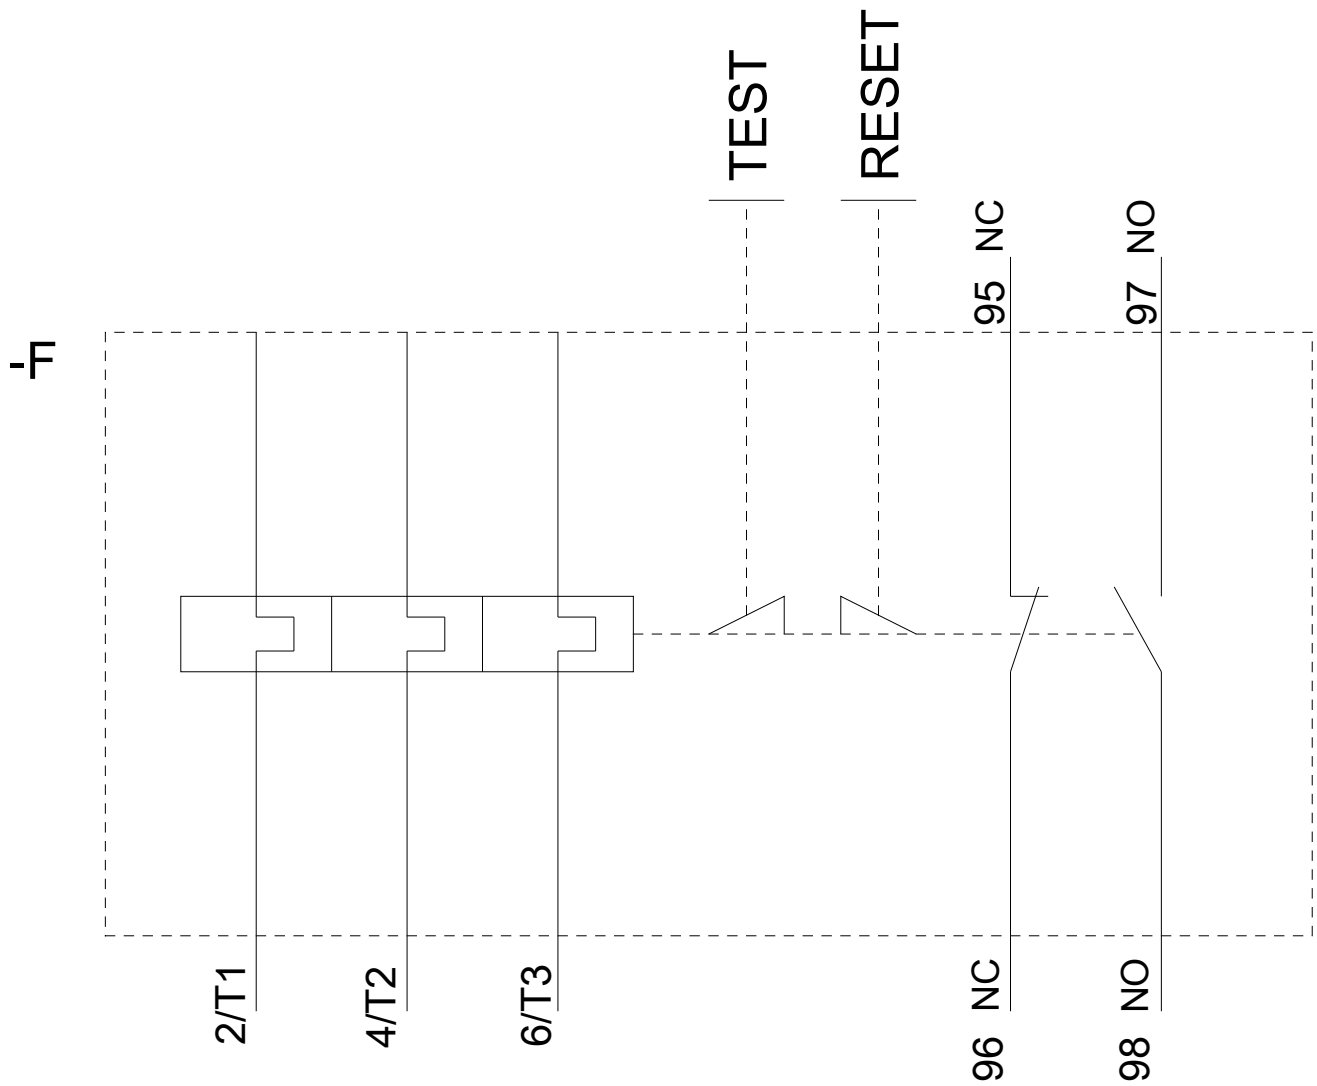

last modified:

04/07/2020