



Connectors > Modular Jacks & Plugs > Modular Jack & Plug Accessories > Modular Jack & Plug Caps & Covers



Modular Jacks & Plugs Accessory Type: **Protective Cover**

Modular Jacks & Plugs Products: **Accessories**

Shielded: **No**

Sealable: **Yes**

Operating Temperature Range: **-40 – 85 °C [-40 – 185 °F, -40 – 185 °F]**

Features

Product Type Features

Connectors & Connector Components Type	Accessory
Grade	Industrial Ethernet
Closure Cap Type	Plug Cordset
Modular Jacks & Plugs Accessory Type	Protective Cover
Modular Jacks & Plugs Products	Accessories
Sealable	Yes

Body Features

Cover Material	Zinc
Seal Material	Silicone Rubber

Housing Features

Compatible With Connector Shape	Circular
---------------------------------	----------

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F][-40 – 185 °F]
-----------------------------	---

Operation/Application

Shielded	No
----------	----

Industry Standards

Standard Reference	Open Device-Net Vendors Association (ODVA)
--------------------	--



Packaging Features

Packaging Quantity	1
Packaging Method	Bag, Box

Other

Lanyard	With
Coupling Nut Base Material	Zinc
Lanyard Length	127 mm[5 in]

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2355443-1
RJ45 CAT5e PANEL MOUNT SOCKET



TE Part # 2355443-2
RJ45 CAT5e PANEL MOUNT SOCKET
(PBT)


Customers Also Bought



TE Part #1558666-8
T9GS1L14-48




TE Part #1-1393254-6
W91-X1110-10=M6/M7/M9/W6/W7

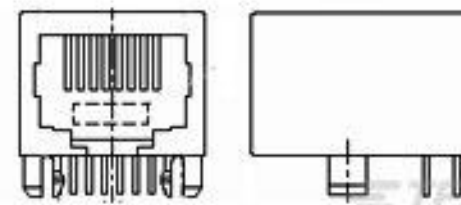

TE Part #1470648-1
RJ45,10P8C,LP,SIDE ENTRY,6u*



TE Part #1-6116317-0
2X8 OFFSET STK MJ,SHLD,LED(R/G),
PNL GND

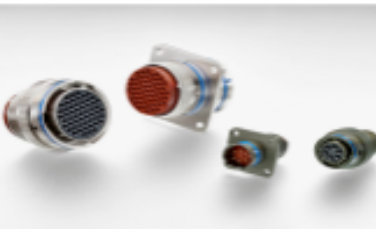


TE Part #YAFD56-20-39SNC012
PLUG ASSY



TE Part #1645621-1
HM ZD 4 PAIR PIN ASSEM, 15 col 5.3
Sn



TE Part #1645622-1
HM ZD 4 PR HEADER ASSY, 5
COLUMN Sn



TE Part #1879901-1
R9007 100R SURGE RESISTOR

Documents

Product Drawings

RJ45 PROTECTION CAP

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2355444-1_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2355444-1_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2355444-1_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



[Product Specifications](#)

[Application Specification](#)

English