


## FEATURES

- Material: Warp proof self-extinguishing UL approved PVC, 94V-0 flammability rating, M1 rating NF fire resistant test.
- Color: White
- Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover, benefits vertical installations, and improves effectiveness and avoid cover slip off.
- 4.5mm SLOT with score line.

## RS PRO Wiring Duct

Allied No.: 7247-2690 7247-2691

7247-2692

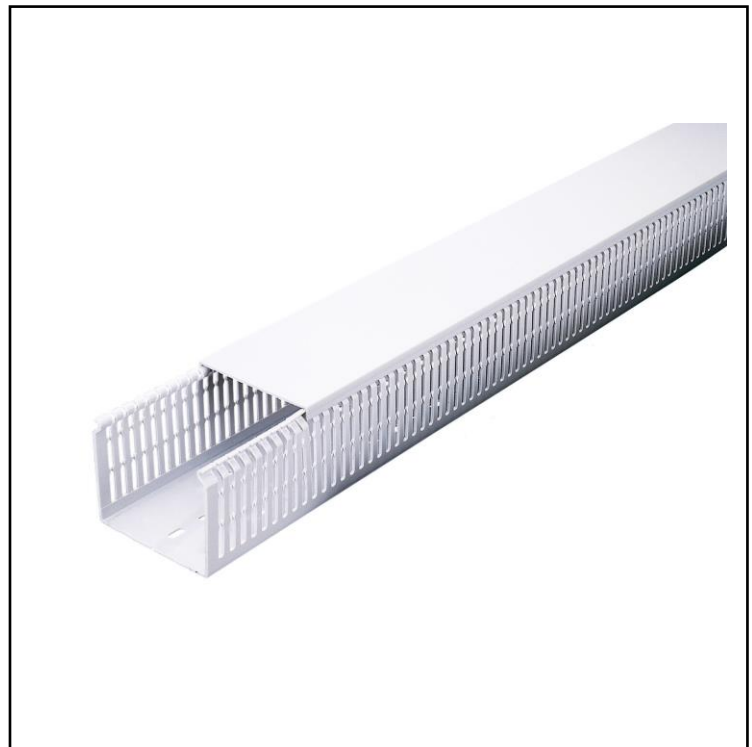

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description ATTRIBUTE 1

- Material: Warp proof self-extinguishing UL approved PVC, 94V-0 flammability rating, M1 rating NF fire resistant test.
- Color: White
- Vicat softening point: 86°C
- UL Test up to 50°C
- 4.5mm SLOT with score line.

※ Regular wiring duct cover can be upgrade to NON-SLIP ones which improves tightness between duct and cover, benefits vertical installations, and improves effectiveness and avoid cover slip off.

## General Specifications

Series	Wiring Duct
Type	
Colour	White
Material	PVC
UV Resistant	NO
Minimum Operating Temperature	0°C
Maximum Operating Temperature	Vicat softening point: 86°C, UL Test up to 50°C
Fire Behaviour	Self-Extinguishing
Quantity	2M

## Mechanical Specifications

Unit:mm						
Allied No.	W x H (mm)	Slot (mm)	Wires to be Contained (16-14 AWG)	pack size	Length (1SET)	Color
72472690	30x80	Open 4.5mm	110~115pcs	8SET	2M	White
72472691	40x80	Open 4.5mm	120~135pcs	8SET	2M	White
72472692	60x80	Open 4.5mm	180~210pcs	8SET	2M	White

## Approvals

<b>Declarations</b>	
<b>Standards Met</b>	UL, CSA, RoHS

## Similar Products

Stock No.	Brand	Product Name	Colour	Material

