


AC2396



AS-Interface illuminated pushbutton module

AS-i Module 2BI 2LO WT/WT

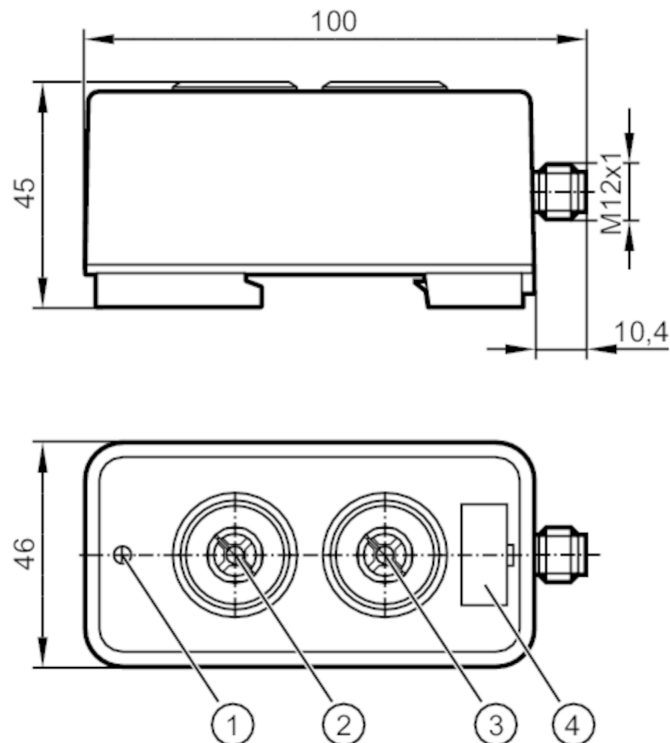

- 1 LED
- 2 pushbuttons 2 / LED 2
- 3 pushbuttons 1 / LED 1
- 4 panel for labelling



Application		
Design	Color inserts changeable	
Application	field installation	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	55
Inputs		
Sensor supply of the inputs	AS-i	
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-40...85
Protection	IP 67	
Tests / approvals		
EMC	EN 61000-6-2	
	EN 62026-2	



AS-Interface illuminated pushbutton module

AS-i Module 2BI 2LO WT/WT

AS-i classification					
AS-i version	2.11; 3.0				
Extended addressing mode	yes				
AS-i profile	S-B.A.E				
AS-i I/O configuration	[hex]	B			
AS-i ID code	[hex]	A.E			
AS-i certificate	134701				
Data bits	Data bit	D0	D1	D2	D3
	LED	1	2	-	-
	pushbuttons	-	-	1	2
Mechanical data					
Weight	[g]	137.6			
Type of mounting	Mounting on DIN rail				
Dimensions	[mm]	89.6 x 46 x 45			
Material	PA				
Displays / operating elements					
Display	Power		LED, green		
	errors		LED, red		
Operating elements	2		freely programmable backlit function keys		
Electrical connection					
Module connection	M12				
Accessories					
Items supplied	cover support: 2				
	color inserts: 2, red				
	2, green				
	2, yellow				
	2, blue				
	2, white				
	Mounting adapter: 1				
Remarks					
Remarks	The pushbuttons (EAO type 84) provide protection against accidental contact.				
	Housing and pushbuttons can be labeled.				
Pack quantity	1 pcs.				
Electrical connection					
					
1	AS-i +				
3	AS-i -				

