




Professionally approved products.

Product Datasheet

GEN1700 Universal Signal Conditioner

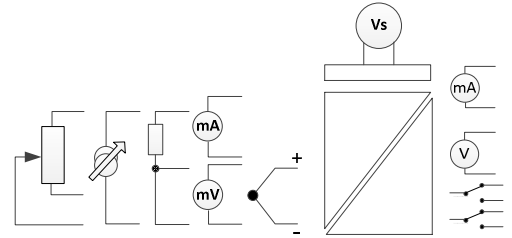

INTRODUCTION

The GEN1700 is a new generation DIN rail mounted universal signal conditioner. It has been designed to accept most common process and temperature sensor inputs and provide the user with a programmable current or voltage output signal plus dual trip relays with a programmable delay function. Isolation is provided between input, outputs and supply. All temperature ranges are linear to temperature. Both input and output loop excitation is provided as well as a fully universal power supply.

Designed for ease of use, our latest USB interface is fitted for quick and easy configuration. Just connect a standard USB cable between the GEN1700 and your PC. Using the free configuration software, your PC will automatically upload the existing configuration data and guide you through any changes you wish to make. To further help save time, the GEN1700 does not need to be wired to a power supply during the configuration process, it is powered via the USB interface from your PC.

The following parameters are configurable:-

INPUT TYPE		SCALE / RATE	ANALOGUE OUTPUT	TRIP OUTPUTS	USER TRIM OPTIONS
RTD	Pt100 .00385 (IEC)	°C / °F / °K Update Rate	Current (4 to 20) mA Preset (0 to 20) mA Preset User Programmable Range Voltage (0 to 10) V Preset User Programmable Range Fault Condition Up Scale Down Scale User Programmable Setting	TRIP 1(A) / TRIP2 (B) Setpoint Hysteresis High Al Low Al High Con Low Con Off On Delay Off Delay	1. Off 2. Trim 3. Push Button Configuration
	Pt100 .00391 (IPTS-68)				
	Pt100 .00392 (IPTS-68)				
	Pt100 .00393 (ITS-90)				
	Ni100 .00618 (DIN)				
Ni120 .00672 (Nickel A)					
Cu100 .00427					
Cu53					
T/C	K, J, E, N, T, R, S, L,U, B, C(W5), D(W3), G(W)				
SLIDE WIRE	> 1K	Process Variable Scaling	Output damping rise Output damping fall		
CURRENT (mA)	± 30 mA (4 to 20) mA Capability	Update Rate			
VOLTAGE	± 50 mV ± 200mV ± 1V ± 10V				





TEMPERATURE INPUTS

INPUT	RANGE	ACCURACY	STABILITY WITH TEMPERATURE
THERMOCOUPLE			
K	(-200 to 1370) °C (-320 to 2498) °F	1 Reading / Second $\pm 0.5\text{ °C} + (0.1\% \text{ of FSR})$ 4 Readings / Second $\pm 1.0\text{ °C} + (0.1\% \text{ of FSR})$ 10 Readings / Second $\pm 2.0\text{ °C} + (0.1\% \text{ of FSR})$	$\pm 0.05\% \text{ FSR}/\text{°C}$
J	(-200 to 1200) °C (-320 to 2190) °F		
E	(-200 to 1000) °C (-320 to 1832) °F		
N	(-180 to 1300) °C (-292 to 2372) °F		$\pm 0.08\% \text{ FSR}/\text{°C}$
T	(-200 to 400) °C (-320 to 750) °F		$\pm 0.15\% \text{ FSR}/\text{°C}$
R *1 *2	(-10 to 1760) °C (-148 to 3200) °F		$\pm 0.10\% \text{ FSR}/\text{°C}$
S *1 *2			
L	(-100 to 600) °C (-148 to 1100) °F		$\pm 0.08\% \text{ FSR}/\text{°C}$
B *1 *2	(0 to 1600) °C (32 to 3000) °F		$\pm 0.10\% \text{ FSR}/\text{°C}$
U	(0 to 600) °C (32 to 1100) °F		$\pm 0.08\% \text{ FSR}/\text{°C}$
C(W5) *2	(0 to 2300) °C (32 to 4200) °F		$\pm 0.05\% \text{ FSR}/\text{°C}$
D(W3) *2			
G(W) *2			
RTD			
Pt100.00385 (IEC)	(-200 to 850) °C (-320 to 1560) °F	1 Reading / Second $\pm 0.15\text{ °C} + (0.05\% \text{ of FSR})$	$\pm 0.015\% \text{ FSR} / \text{°C}^{\ast 3}$
Pt100 .00391 (IPTS-68)	(-200 to 630) °C (-320 to 1160) °F		
Pt100 .00392 (IPTS-68)			
Pt100 .00393 (ITS-90)	(-200 to 960) °C (-320 to 1760) °F	4 Readings / Second $\pm 0.5\text{ °C} + (0.1\% \text{ of FSR})$	
Ni 100 .00618 (DIN)	(-60 to 180) °C (-76 to 320) °F	10 Readings / Second $\pm 1.0\text{ °C} + (0.1\% \text{ of FSR})$	
Ni120 .00672 (Nickel A)	(-80 to 260) °C (-112 to 460) °F		
Cu100 .00427			
Cu 53 (GOST)	(-50 to 180) °C (-58 to 320) °F		

Key FSR = Full Scale range,
 *1 Only over the range (800 to 1600) °C,
 *2 cold junction tracking range(0 to 70) °C,
 *3 Ambient (-10 to 50) °C

Impedance (Thermocouple) 1 MΩ
 Open Circuit sensor bias 0.2 uA
 Cold junction range (-20 to 70) °C
 Cold Junction Accuracy $\pm 0.5\text{ °C}$
 Cold Junction Tracking $\pm 0.05\text{ °C}$
 RTD Connection 2 or 3 wire
 RTD Lead Resistance 20 Ω Max
 RTD Lead effect 0.015 °C / Ω.
 RTD Excitation Current < 1 mA
 Update Rate (Resolution) 1 readings / second (16 Bits) ; 4 Readings / Second (14 Bits) ; 10 readings / Second (12 Bits)
 Isolation 500 V to output : 3750 V to supply and Trips
 Display OK LED blinks when signal is within range, Continuously on in fault



PROCESS INPUTS

INPUT	RANGE	ACCURACY @ 20 °C	STABILITY WITH TEMPERATURE
50 mV	± 50 mV (Max ± 75 mV)	1 Reading / Second ±0.04% + (0.1% of FSR)	± 0.04 % FSR/ °C
200 mV	±200 mV (Max ± 230 mV)		
1 V	± 1 V (Max ± 1.3 V)	4 Readings / Second ± 0.1 % + (0.1 % of FSR)	
10 V	± 10 V (Max ± 11 V)		
mA	± 25 mA (Max ±30 mA)	10 Readings / Second ± 0.2 % + (0.1 % of FSR)	± 0.05 % / °C
Slide Wire	(0 to 100) % (1 to 1000) KΩ pot		± 0.025 % FSR / °C
Ohms	(20 to 400) Ω Max (0 to 480) Ω		

Key FSR = Full Scale range

Voltage Input Impedance 1 MΩ
 Current Input Impedance 20 Ω
 Slide Wire Input Range 1 KΩ to 1000 KΩ Pot
 Resistance Connection 2 or 3 Wire
 Isolation 500 V to output : 3750 V to supply and Trips
 Update Rate (Resolution) 1 readings / second (16 Bits) ; 4 Readings / Second (14 Bits) ; 10 readings / Second (12 Bits)

CURRENT OUTPUT

RANGES mA				Fault /Error Signal mA		
	Min	Max	Min Span	Up	Down	User
(4 to 20) mA	4.0	20.0	-	22.5	3.8	(0.0 to 25) mA
(0 to 20) mA	0.0	20.0	-			
USER	0.0	24.0	0.5			

Type Two wire current sink; or two wire current source
 Supply in sink mode (11 to 30) V dc , 24 V nominal
 Max loop load Sink mode loop load of 600 Ω @ 24 V ; Source mode 550 Ω
 Response time < 500 ms to reach 95 % of final value ; Start up time < 3 s
 Calibration Accuracy ± 5 uA
 Loop Effects Loop ripple 0.03 % of FSR;
 Supply sensitivity Supply ripple rejection < ± 5 uA error @ 1 V rms 50 Hz ripple
 Protection Reverse connection and over-voltage protection. Max over voltage current 100 mA.
 Isolation 500 V to input : 3750 V to supply and Trips
 User Trim Options
 1. Off (Locked)
 2. Push button user trim at both ± 10 % of zero and ± 10 % of span
 3. Manual Push Button range configuration
 Current Output Damping Programmable rise and fall (0 to 250) seconds, for a (0 to 20) mA swing.
 Stability ± 5 uA / °C

**VOLTAGE OUTPUT**

RANGES V				Fault /Error Signal V		
	Min	Max	Min Span	Up	Down	User
(0 to 10) V	0.0	10.0	-	11.5	0.0	(0.0 to 13)
USER	0.0	12.0	0.5			

Type	Voltage generated across 500 Ω resistor
Min Load	10 K Ω User Configurable correction for Load.
Response time	< 500 ms to reach 95 % of final value ; Start up time < 3 s
Calibration Accuracy	\pm 5 mV
Isolation	500 V to input : 3750 V to supply and Trips
User Trim	Push button user trim at both zero and span
Voltage Output Damping	Programmable rise and fall (0 to 250) seconds, for a (0 to 10) V swing.
Stability	\pm 1mV / $^{\circ}$ C

TRIP OUTPUTS

Type	Dual Form C relay contacts
Contact rating	(240 V ac rms @ 1A ; 30 V dc @ 1 A) Resistive Load
Trip Type	Individual trips 1 (A) & 2 (B) high or low level, full range setpoint plus adjustable Hysteresis
Ranges	Setpoint programmed on units, covering full range of input.
Hysteresis	Set in units.
Isolation	To any other port 3750 V
Delay	Programmable on / off delay (0 to 250) seconds for each trip.

SUPPLY


Range	(20 to 240) V DC, (20 to 240) V AC 50/60 Hz
Power	3 W max
Protection	Internal fuse , Over Voltage
Isolation	Supply to any port 3750 V

GENERAL

Ambient	Operating (-20 to 70) $^{\circ}$ C (10 to 95) % RH non condensing. Storage (-40 to 85) $^{\circ}$ C
Approvals	CE tested to BS EN 61326 ; BS EN 61010_1

MECHANICAL

(Dimensions in mm)

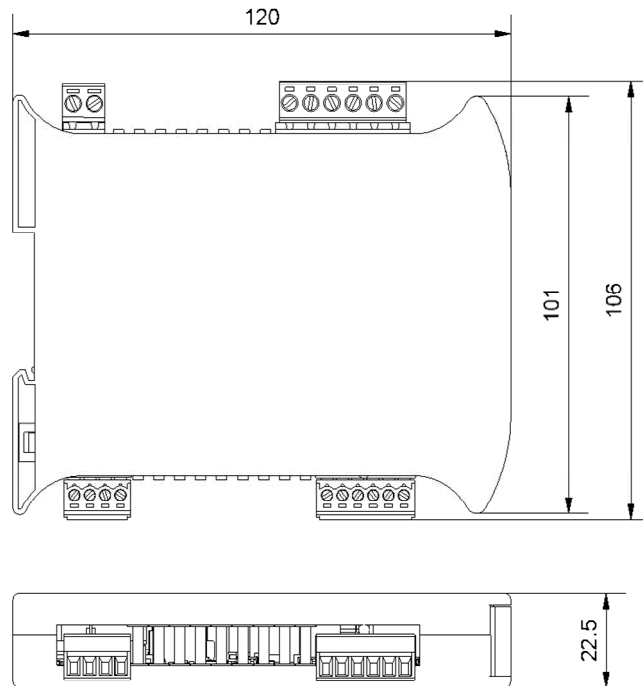

ELECTRICAL

