

## FEATURES

- Rated Voltages 240V a.c./120V d.c., 690V a.c./350V d.c.
- Breaking Capacities 100kA a.c. 100kA d.c.
- Breaking Range and Utilisation Category aR

## RS PRO BS SEMICONDUCTOR PROTECTION FUSE-LINKS WITH BOLTED CONNECTIONS

RS Stock No.: 2213635, 2213636



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Bolted Tag Fuses

### Product Description

A comprehensive range of Fuse-Links for the protection of semiconductor devices. The 240 and 690-volt series comply with the performance and dimensional requirements of BS 88: Part 4 and IEC 60269-4. In addition to the current ratings specified in IEC 60269-4 and BS 88-4, other non-standard current ratings are available.

#### Indicators

Trip-indicator fuse-links are available for use in parallel with the main fuse-link. Indicator fuse-links can either be attached to the associated fuse-link or mounted separately in panel mounted fuse clips.

A push-on adaptor and micro switch attachment is available for use with the trip indicator to give the facility of remote indication.

### General Specifications


Current Rating	100 A
Voltage Rating	120 V dc, 240 V ac
Fuse Standard	IEC 60269-4/BS 88-4
Fixing Centres	41.8 mm
Tag Width	12.7 mm
Overall Length	58.4 mm
Body Diameter	19.3 mm
Body Length	29.2 mm

### Approvals

<b>Standards Met</b>	IEC 60269-4/BS 88-4
----------------------	---------------------

### Similar Products

Stock No.	Brand		Voltage Rating a.c. Volt	Current Rating Amps
(221-3637)	RS PRO		240	20
(221-3639)	RS PRO		240	35
(221-3641)	RS PRO		240	50
(221-3633)	RS PRO		240	125

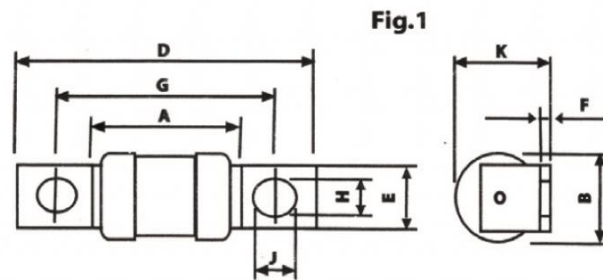

Voltage Rating (V)	Current Rating (A)	Fig No.	Dimensions in millimetres								
			A max.	B max.	D max.	E nom.	F max.	G nom.	H nom.	J min.	K max.
240	10-100	1	29.2	17.7	58.4	12.7	2.5	41.8	6.4	7.9	19.3
240	125-315	1	32.6	38.2	85.0	25.4	3.3	59.0	10.3	13.0	41.5
240	350-630	3	32.6	38.2	85.0	25.4	6.4	59.0	10.3	13.0	83.0
690	10-100	1	50.6	17.7	79.8	12.7	2.5	63.5	6.4	7.9	19.3
690	125-200	2	50.6	37.0	95.0	32.0	1.6	70.0	8.7	10.3	19.9
690	200-355	1	60.0	38.2	114.0	25.4	3.3	85.0	10.3	13.0	41.5
690	350-630	3	60.0	38.2	114.0	25.4	6.4	85.0	10.3	13.0	83.0