

## FEATURES

- Precise temperature control
- Compact geometric sizes and lightweight
- Reliable solid state operation
- No sound or vibration
- Environmentally friendly
- DC operation
- RoHS REACH Compliant

## RS PRO Peltier Module

RS Stock No.: 2172417



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

This Peltier module is suitable for the higher current and larger cooling requirements. Typical application includes experimental, scientific and biomedical instruments, laboratory equipment, industry and electrical equipment and consumables.

## Performance Parameters

Hot Side Temperature (°C)	25°C	50°C
Q <sub>max</sub> (watts):	16.6	18.4
Δ T <sub>max</sub> (°C):	67	74
I <sub>max</sub> (amps):	3.9	3.9
V <sub>max</sub> (vdc):	7.6	8.1
AC Resistance (ohms):	1.67	1.88



**\*\*Tolerances for thermal and electrical parameters are ± 10%.**

## Manufacturing Specifications

### Performance Curves



	RTV Silicone (White)
	Blank Ceramics (96% Al <sub>2</sub> O <sub>3</sub> )
<b>Plating</b>	N/A
<b>Joint Cover</b>	RTV Silicone (White)
<b>Lead Wires</b>	24AWG PVC Stranded
<b>Lead Wire Length</b>	150mm±5mm
<b>Solder Construction</b>	138°C, Bismuth Tin (BiSn)
<b>Module Size (mm)</b>	15±0.1, 30±0.1, 30±0.1, 3.2±0.05
<b>Flatness/Parallelism</b>	0.05 mm / 0.05 mm
<b>Marking</b>	P/N & S/N printed on cold side surface

Hot Side Temperature 25°C

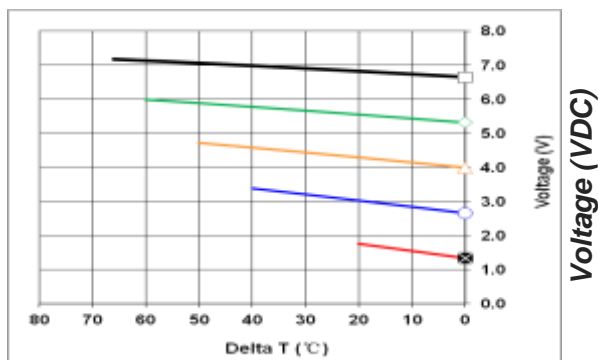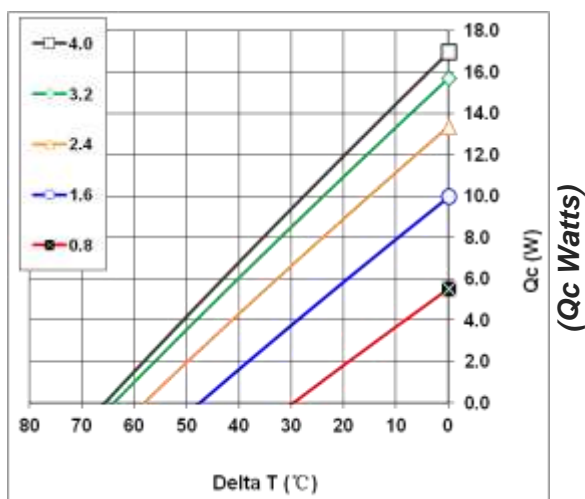

Delta T (°C)

Hot Side Temperature 50°C

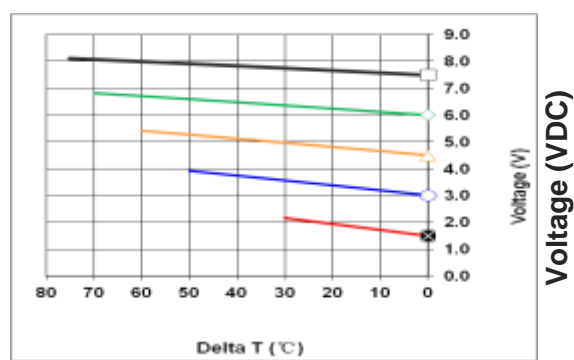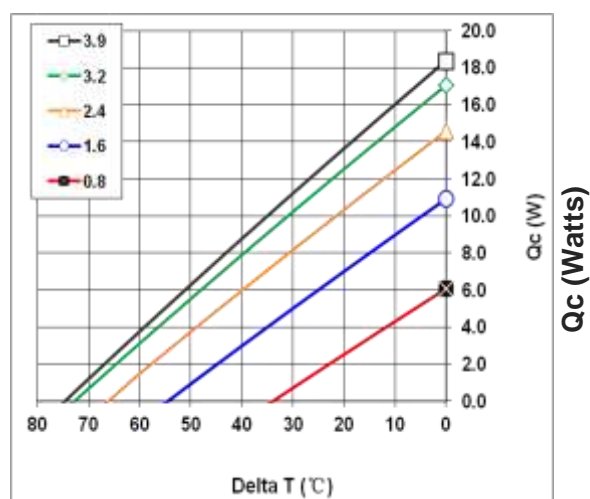


Delta T (°C)

## Operation Cautions

- For maximum reliability, storage and operation below 90°C/194°F in a non-condensing environment is recommended.
- Do not exceed I<sub>max</sub> or V<sub>max</sub> when operating module.

## Mechanical Drawing

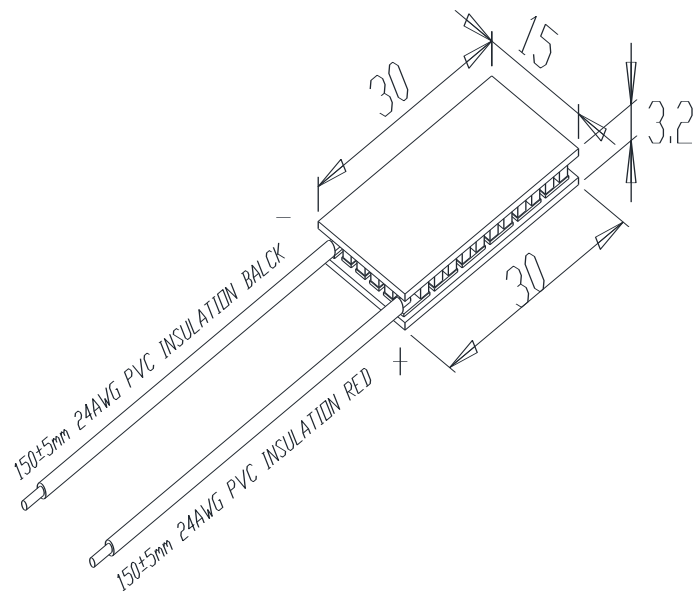

\*\*All units are in millimeters unless otherwise stated.

Additional Information

EAN

Custom Tariff Number	85415000
----------------------	----------