

G1724 WideArea™ Eye/Face Wash, Wall Mounted, Stainless Steel Bowl ☐ **G1724P** WideArea™ Eye/Face Wash, Wall Mounted, Plastic Bowl



**APPLICATION:** WideArea<sup>™</sup> eye/face wash for wall mounting. Four GS-Plus™ spray-type outlet heads deliver a flood of water over a wide area of coverage for complete rinsing of eyes and

**SPRAY HEAD ASSEMBLY:** Four GS-Plus<sup>™</sup> spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

**VALVE:** 1/2" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals.

**BOWL:** 11 1/2" diameter. Bowl is stainless steel (G1724) or orange ABS plastic (G1724P).

**MOUNTING:** Heavy duty cast aluminum wall bracket with corrosion resistant powder coated finish.

**SUPPLY: 1/2" NPT female inlet.** 

WASTE: 1 1/4" NPT female outlet.

**SIGN:** ANSI-compliant identification sign.

**QUALITY ASSURANCE:** Unit is completely assembled and

water tested prior to shipment.


## **Available Options**

- DC Stainless steel dust cover for each spray head.
- HS Auxiliary hand-held drench hose for rinsing eyes, face or body.
- SC Self-closing ball valve. Note: Eye/face washes with selfclosing valves do not comply with ANSI Z358.1-2009.
- GRN Green ABS plastic bowl.
- YEL Yellow ABS plastic bowl.
- T Chrome plated brass tailpiece and trap with 1 1/2" IPS waste connection.
- TP 1 1/2" OD Chrome plated brass tailpiece.
- TMV G3600 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2009. Refer to "Tempering Units" section for complete technical and product selection information.





- ☐ **G1724** WideArea™ Eye/Face Wash, Wall Mounted, Stainless Steel Bowl
- ☐ **G1724P** WideArea™ Eye/Face Wash, Wall Mounted, Plastic Bowl

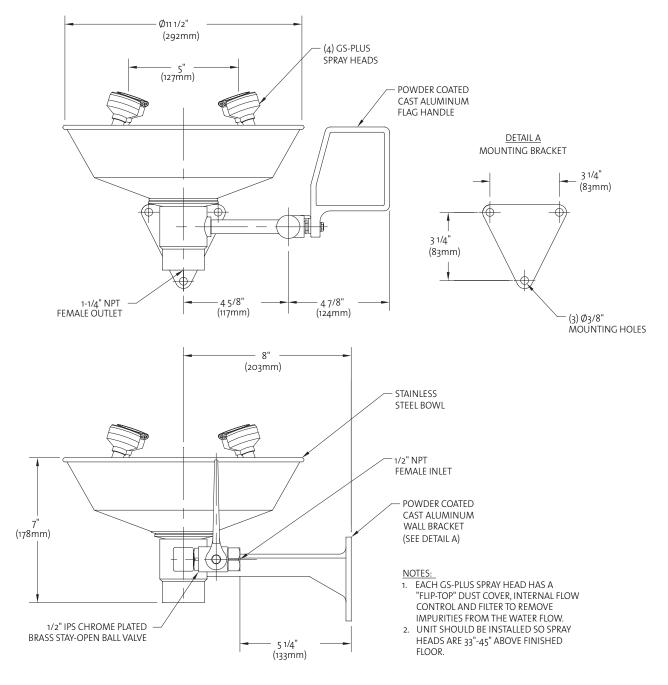

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm$  1/4" (6mm). rev. 0712

Sign Included

