



□ **G1696** Emergency Shower, Free Standing, Stainless Steel Construction

Application: Free standing emergency shower. Ideal for use in areas where highly corrosive materials are handled, as well as in laboratory and clean room applications.

Shower Head: 10" diameter stainless steel with 20 GPM flow control.

Valve: 1" IPS stainless steel stay-open ball valve. Valve has stainless steel ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.


Pipe and Fittings: Schedule 40 stainless steel. Furnished with orange polyethylene pipe covers for high visibility and corrosion resistance.

Supply: 1-1/4" NPT female top or side inlet.

Sign: ANSI-compliant identification sign.


Available Options

- **G6040** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
- **AP275-200** Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when shower is activated. Furnished complete with flow switch and mounting hardware.
- **AP250-015** Modesty curtain for horizontal shower installation.

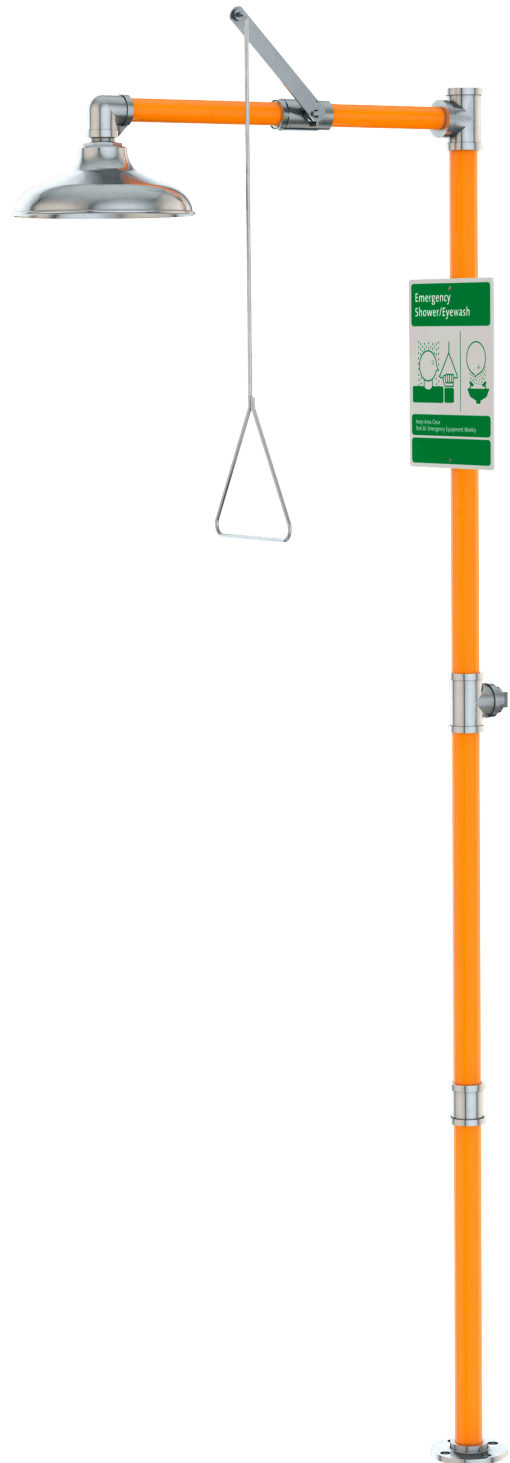



□ G1696 Emergency Shower, Free Standing, Stainless Steel Construction

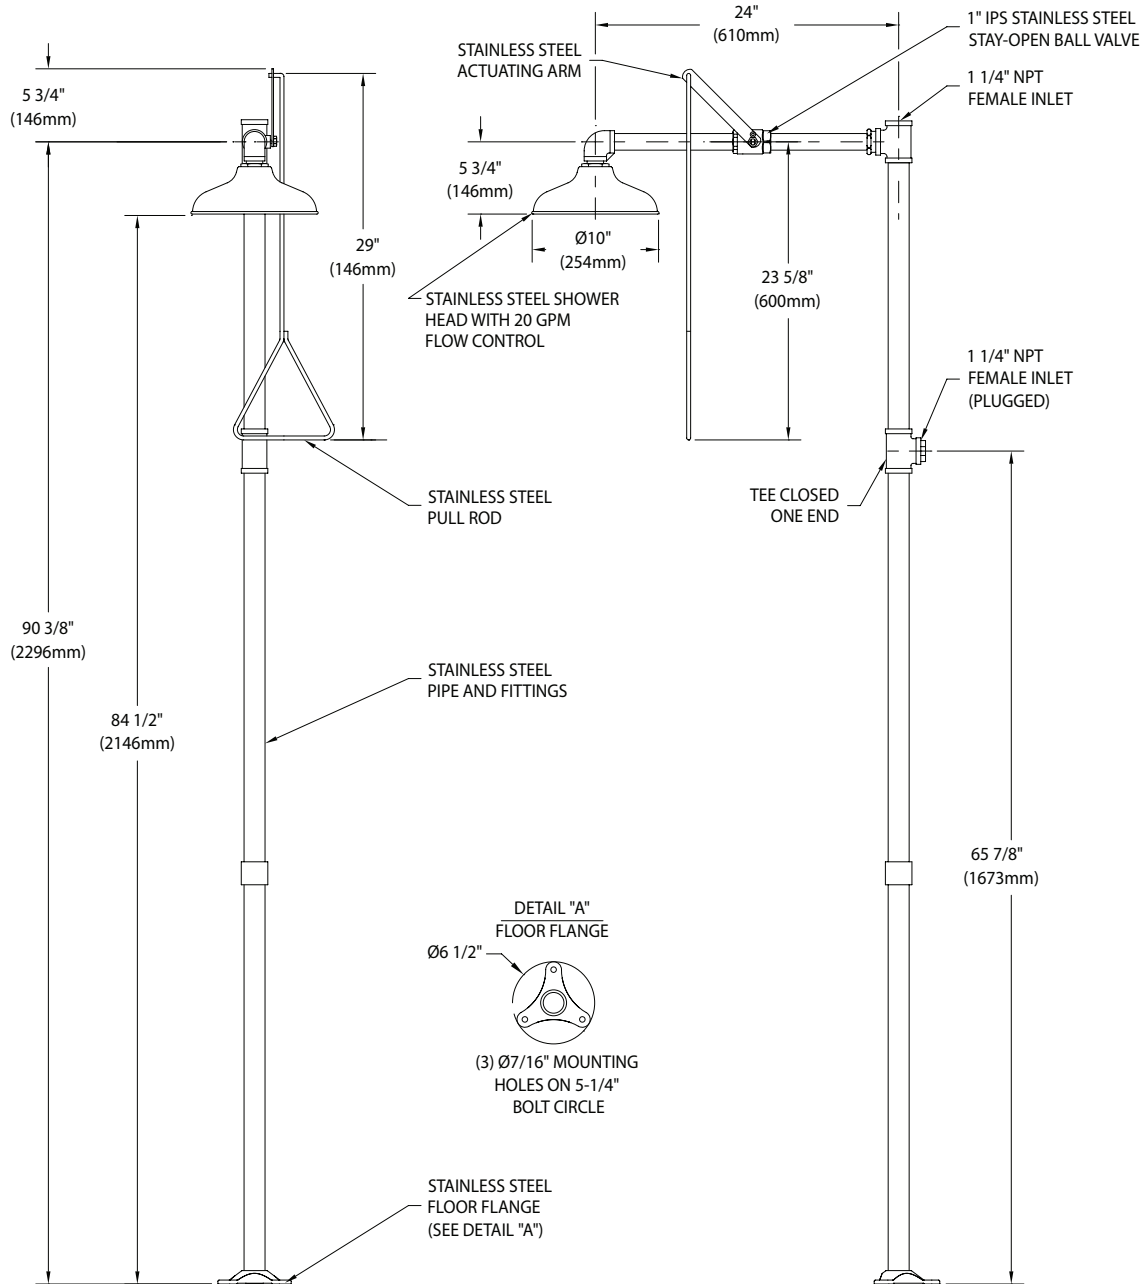

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 010820

Guardian Equipment 312 447 8100 TELEPHONE
1140 N North Branch St 312 447 8101 FACSIMILE
Chicago, IL 60642 gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

