



Connector Location A


Connector Location B

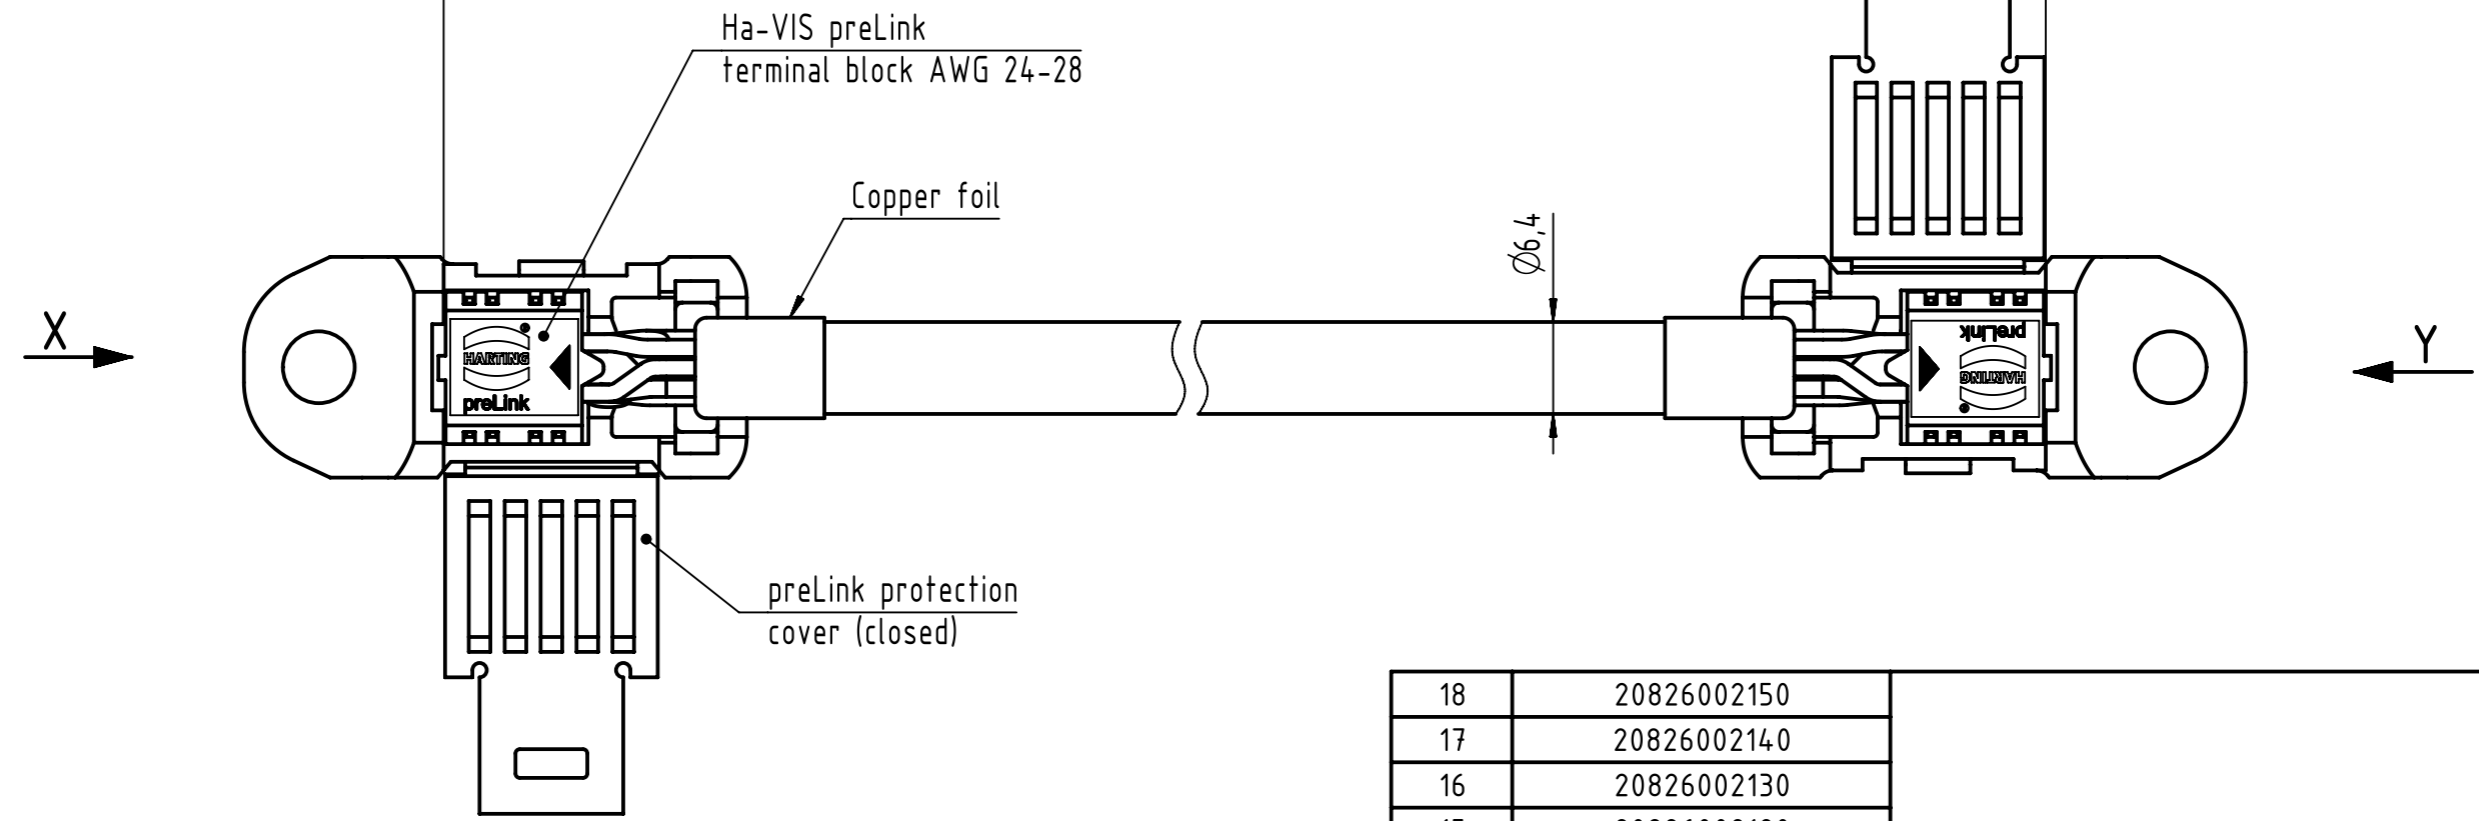



X
(without pos. preLink protection cover)



Loading-Plan
acc. to TIA/EIA 568B

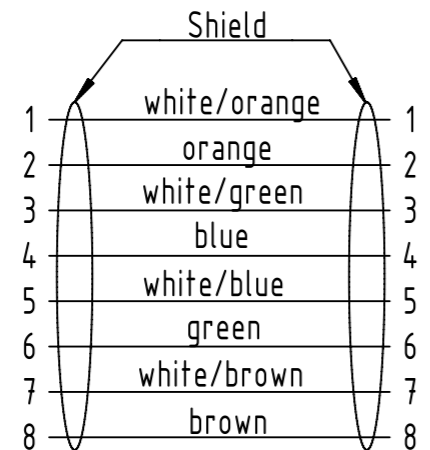

Y
(without pos. preLink protection cover)

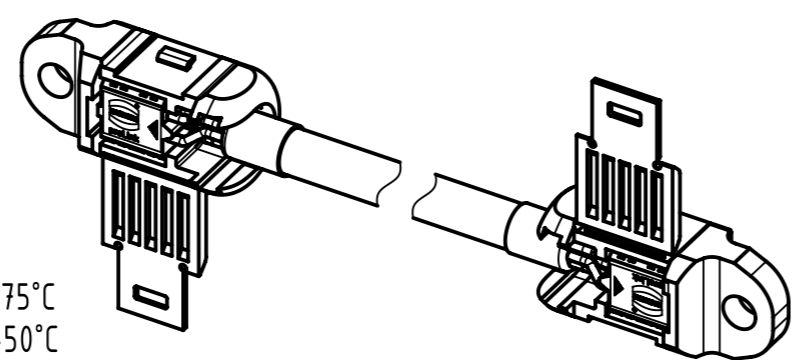

- Protection level: IP20
- Temperature range:
 - Fixed installation: -30°C ...+75°C
 - Dynamic installation: -5°C ...+50°C

| 18 | 20826002150 | 4x2xAWG27/7, PUR, Cat. 7, yellow | 15 |
|-----------|-------------|-------------------------------------|-----------|
| 17 | 20826002140 | | 14 |
| 16 | 20826002130 | | 13 |
| 15 | 20826002120 | | 12 |
| 14 | 20826002110 | | 11 |
| 13 | 20826002100 | | 10 |
| 12 | 20826002075 | | 7.5 |
| 11 | 20826002070 | | 7 |
| 10 | 20826002060 | | 6 |
| 9 | 20826002050 | | 5 |
| 8 | 20826002040 | | 4 |
| 7 | 20826002030 | | 3 |
| 6 | 20826002020 | | 2 |
| 5 | 20826002010 | | 1 |
| 4 | 20826002008 | | 0.8 |
| 3 | 20826002006 | | 0.6 |
| 2 | 20826002004 | | 0.4 |
| 1 | 20826002002 | | 0.2 |
| Cont. no. | Part no. | Type of cable | Dim. a[m] |

All Dimensions in mm |
 Tech. Character. |
 Free size tol. |
 According to production drawing

| | | | | | |
|--|--|--------------------------|--------------------------|--------------------|--|
| All rights reserved Department HCS - RO HARTING Customised Solutions D-32427 Minden | Created by MUNTEANV | Inspected by MUNTEANV | Standardisation AVRAM | Date 2017-08-18 | State Final Release |
| | Title System cable preLink 2x terminal module | | | | |
| Type TB | | Number 20826002XXX | | | Doc-Key / ECM-Nr. 100209218/UGD/005/C 500000123992 |
| | | | | Rev. C | Page 1/1 |