

| PART NUMBER | ITEM ① BODY | ITEM ② STEM | ITEM ③ INSULATOR | ITEM ④ O-RING | ITEM ⑤ LOCKWASHER | ITEM ⑥ MOUNTING NUT | ITEM ⑦ CONTACT | ITEM ⑧ CRIMP SLEEVE |
|--------------|---|---|---------------------|--------------------|------------------------------|---|--|--|
| 138-4307-406 | BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN | BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN | TEFLON | SILICONE RUBBER | STEEL TRI-ALLOY .0001 MIN | BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN | BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN | COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN |
| 138-4307-407 | BRASS TRI-ALLOY PL .0001 MIN | BRASS TRI-ALLOY PL .0001 MIN | TEFLON | SILICONE RUBBER | STEEL TRI-ALLOY .0001 MIN | BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN | BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN | COPPER TRI-ALLOY PL .0001 MIN |

DRAWING NO.
D - 138-4307-401/410


| REVISIONS | | | | |
|-----------|---------|-----|-----|----------------------|
| 1 | 2-15-06 | PAT | PDW | 4-17-06 ECN 50290 |

ENGINEERING RELEASE





LOCKWASHER TRI-ALLOY WAS ZINC
.045-.400 WAS .045-.125

* REVISION NUMBER FOLLOWED BY AN ALPHA *
* CHARACTER INDICATES DRAWING CLARIFI-
* CATION OR PART NUMBER ADDITION ONLY.


| | | | | |
|----|--------|-----|-----|----------------------|
| 1a | 2-8-07 | PAT | PDW | 2-15-07 ECN 50934 |
|----|--------|-----|-----|----------------------|

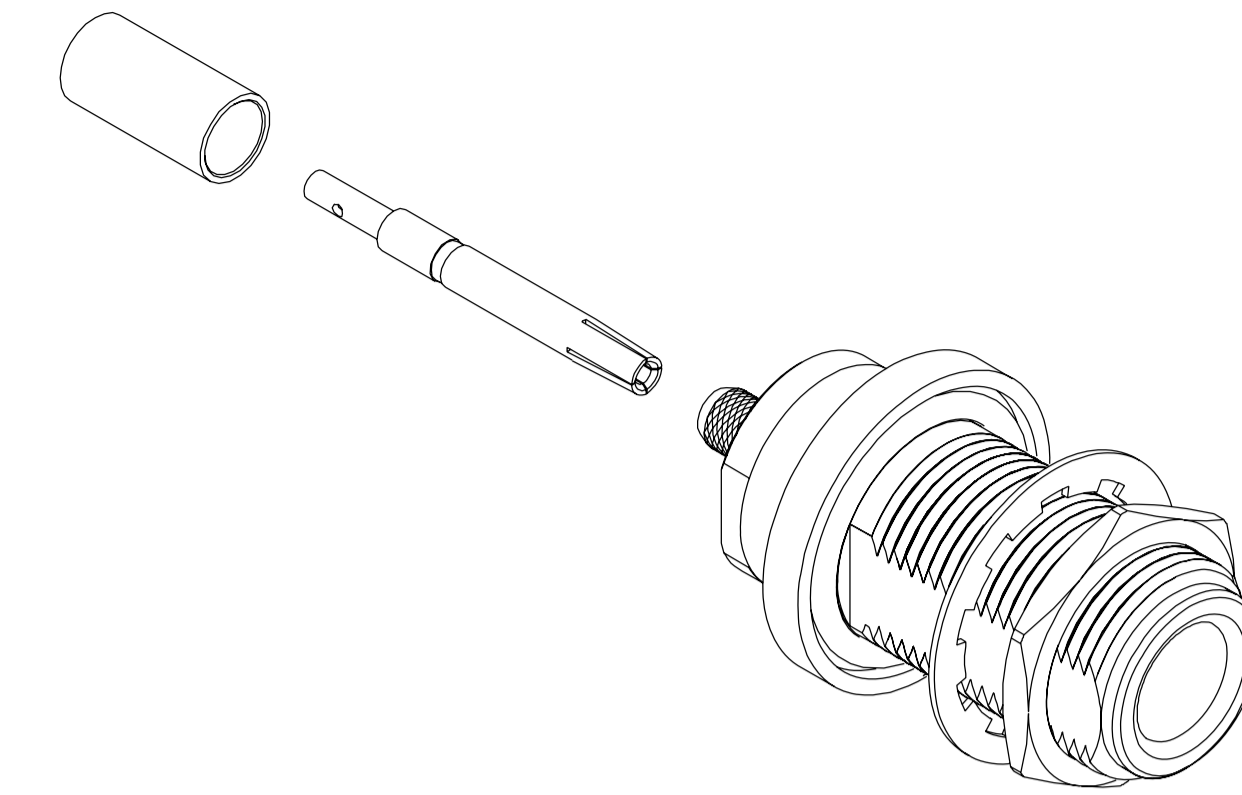

2:1

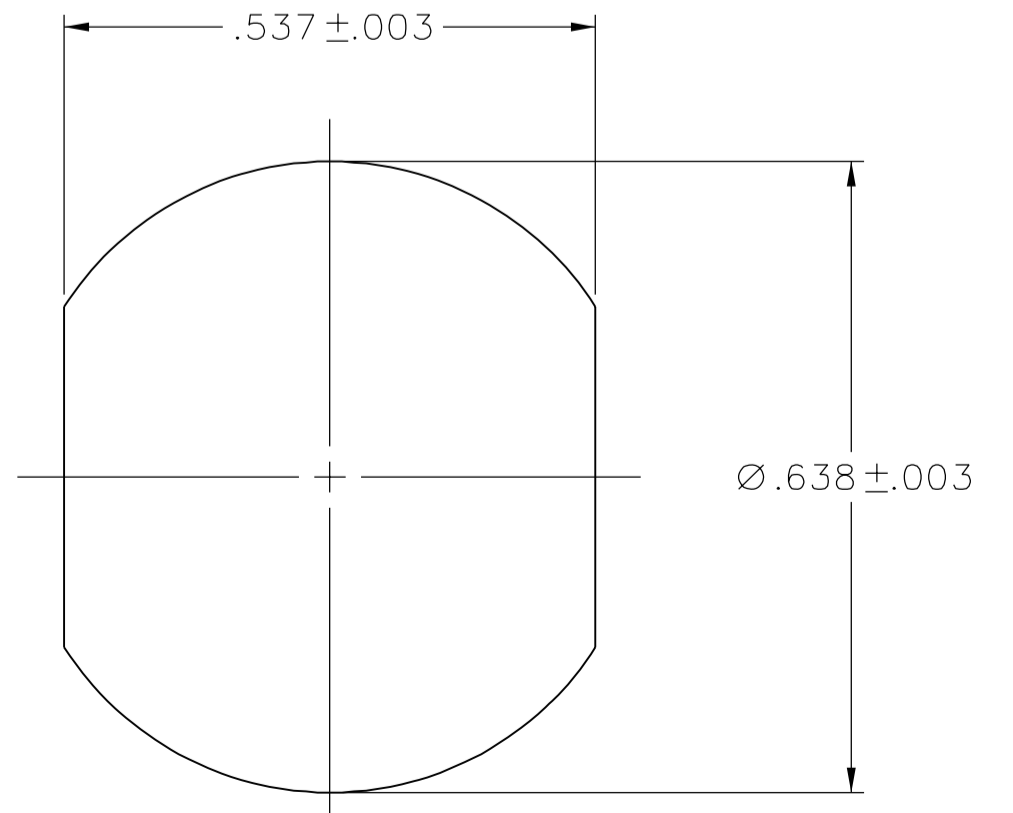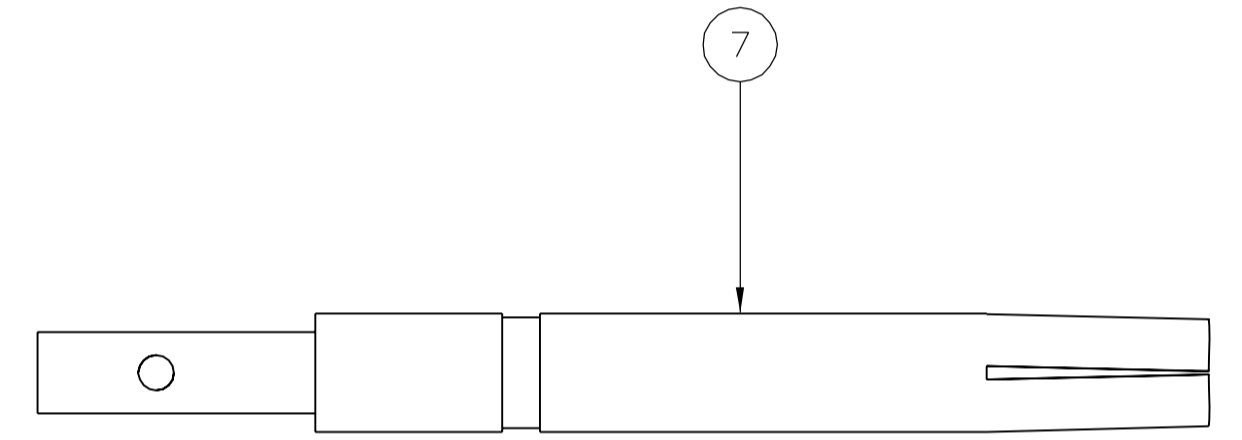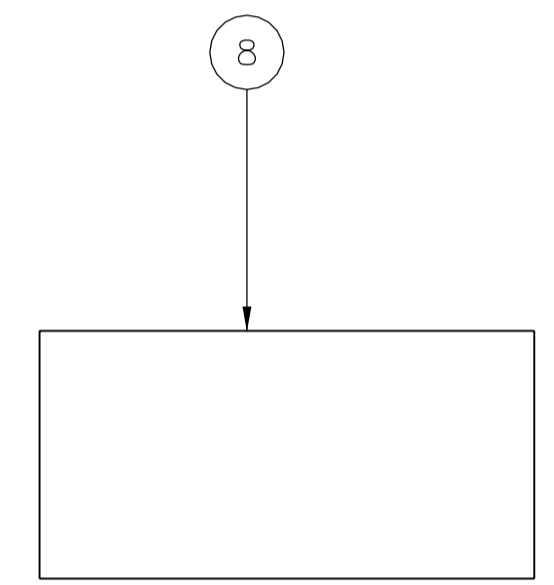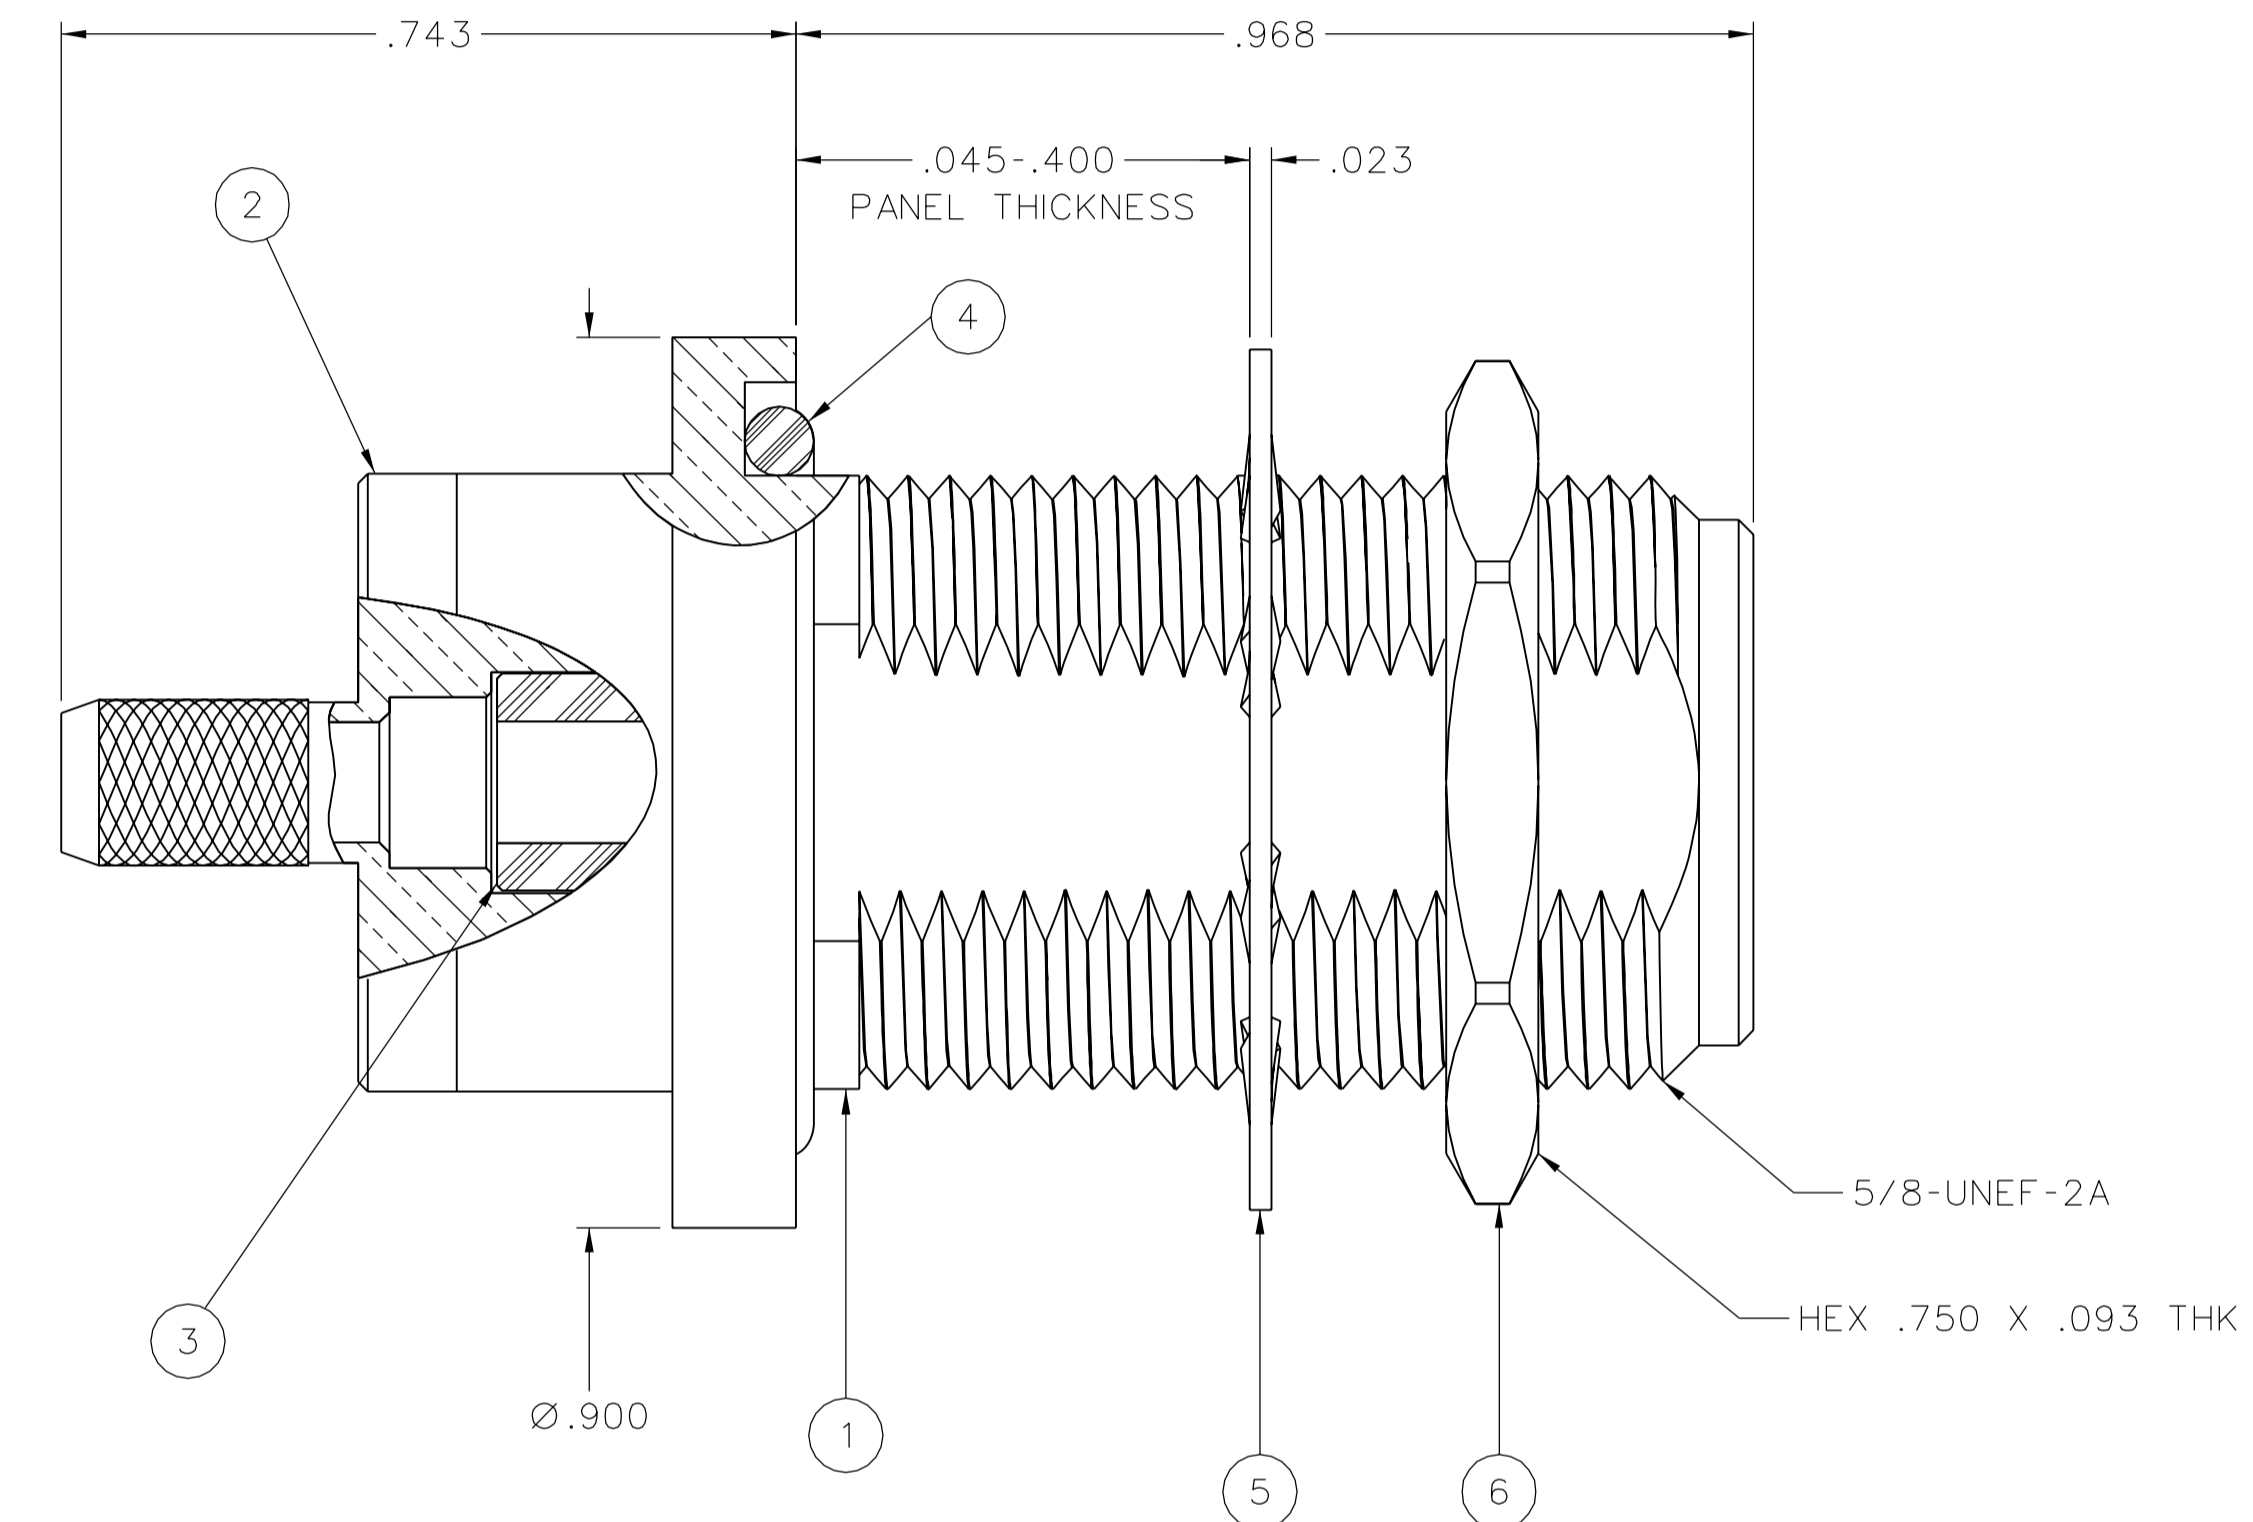

MOUNTING HOLE

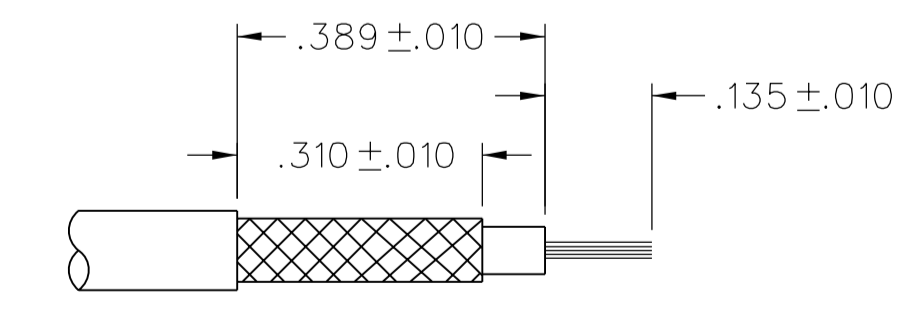

CABLE STRIP DIMENSIONS
NOT TO SCALE

NOTES:

- SPECIFICATIONS:
 - IMPEDANCE: 50 OHMS
 - FREQUENCY RANGE: 0-11 GHz
 - VSWR: 1.30 MAX AT 0-11 GHz
 - WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
 - INSULATION RESISTANCE: 5000 MEGOHM MIN
 - CONTACT RESISTANCE:
 - CENTER CONTACT - INITIAL 1.0 MILLIOHM MAX, AFTER ENVIRONMENTAL 1.5 MILLIOHM MAX
 - OUTER CONDUCTOR - INITIAL 1.5 MILLIOHM MAX, 2 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
 - BODY TO CABLE - INITIAL .05 MILLIOHM MAX, AFTER ENVIRONMENTAL NOT APPLICABLE
 - CORONA LEVEL: 250 VOLTS MIN AT 70,000 FEET
 - INSERTION LOSS: .15 dB MAX, TESTED AT 9 GHz
 - RF LEAKAGE: -90 dB MIN AT 2 TO 3 GHz
 - RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 670 VRMS AT 4 AND 7 MHz
 - THIRD ORDER INTERMODULATION PRODUCT (IMP3): TYPICALLY < -90 dBm (TESTED PER IEC GUIDELINES WITH 20W CW INPUTS AT 1930-1990 MHz)
- MECHANICAL:
 - ENGAGE/DISENGAGE TORQUE: 6 IN-LBS MAX
 - MATING TORQUE: 7-10 IN-LBS
 - COUPLING PROOF TORQUE: NOT APPLICABLE
 - COUPLING NUT RETENTION: NOT APPLICABLE
 - CONTACT RETENTION: NOT APPLICABLE
 - CABLE ACCEPTABILITY: RG 58, RG 141, RG 303
 - CABLE HEX CRIMP SIZE: .213
 - CONTACT HEX CRIMP SIZE: .068
 - CABLE RETENTION: 40 LBS MIN AXIAL FORCE
 - DURABILITY: 500 CYCLES MIN
- ENVIRONMENTAL:
 - (MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012)
 - THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B, EXCEPT 85°C HIGH TEMP
 - OPERATING TEMPERATURE: -65°C TO 165°C
 - CORROSION: MIL-STD-202, METHOD 101, CONDITION B
 - SHOCK: MIL-STD-202, METHOD 213, CONDITION I
 - VIBRATION: MIL-STD-202, METHOD 204, CONDITION B
 - MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

| | | | |
|--------------------------------------|-------------------------|-------------------------------------|---|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | DRAWN BY PAT | DATE 2-15-06 | <p>Cinch Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256</p> |
| DECIMALS _____ mm | CHECKED BY PDW | DATE 4-13-06 | |
| .XXX REF _____ | APPROVED BY JRK | DATE 4-13-06 | |
| MATL _____ | RELEASE DATE 4-17-06 | SHEET 2 OF 2 | |
| FINISH _____ | U/M INCH SCALE 5:1 | DRAWING NO. D - 138-4307-401/410 | |

TITLE
ASSEMBLY, TYPE N
CRIMP BULKHEAD JACK
RG 58