

# Feed-through header - PTSM 0,5/ 5-HHI0-2,5-SMD R44 - 1815154

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB headers, nominal current: 6 A, rated voltage (III/2): 160 V, number of positions: 5, pitch: 2.5 mm, color: black, contact surface: Tin, mounting: SMD soldering

The figure shows a 3-position version

## Your advantages

- ✔ Designed for integration into the SMT soldering process
- ✔ Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting
- ✔ Inverted header with socket contacts for touch-proof device outputs or PCB/PCB connections
- ✔ Additional solder anchors reduce the mechanical strain on the soldering spots



## Key Commercial Data

Packing unit	500 pc
Minimum order quantity	500 pc
GTIN	
GTIN	4046356761369

## Technical data

### Dimensions

Length [ l ]	14 mm
Width	17.3 mm
Pitch	2.5 mm
Dimension a	10 mm
Width [ w ]	17.3 mm
Height [ h ]	5 mm
Height	5 mm
Length	14 mm

### General

Range of articles	PTSM 0,5/...-HHI-SMD
-------------------	----------------------

# Feed-through header - PTSM 0,5/ 5-HHI0-2,5-SMD R44 - 1815154

## Technical data

### General

Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	63 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Nominal current $I_N$	6 A
Maximum load current	6 A
Insulating material	LCP
Flammability rating according to UL 94	V0
Color	black
Number of positions	5



### Standards and Regulations

Connection in acc. with standard	UL
Flammability rating according to UL 94	V0

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

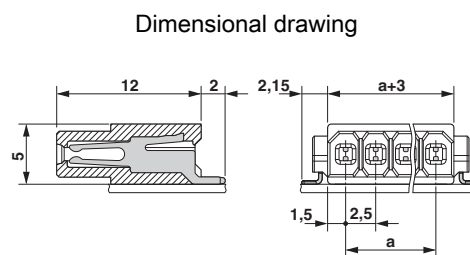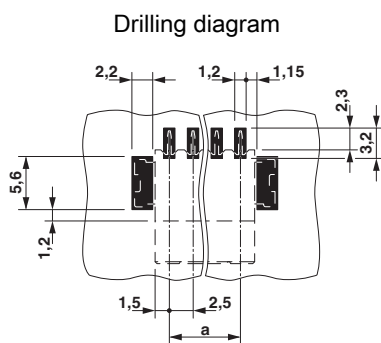

## Approvals

Approvals

Approvals

UL Recognized / VDE Zeichengenehmigung / EAC

# Feed-through header - PTSM 0,5/ 5-HHI0-2,5-SMD R44 - 1815154

## Approvals

Ex Approvals

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E118976-20130619
		B	
Nominal voltage UN		150 V	
Nominal current IN		5 A	

VDE Zeichengenehmigung		<a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a>	40048497
Nominal voltage UN		160 V	
Nominal current IN		6 A	
mm <sup>2</sup> /AWG/kcmil		0.14-.5	

EAC			B.01742
-----	--	--	---------

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>