



# Header - STB 3/3-G-5,08 - 1751031

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal current: 16 A, number of positions: 3, pitch: 5.08 mm, color: green, contact surface: Tin, mounting: Wave soldering

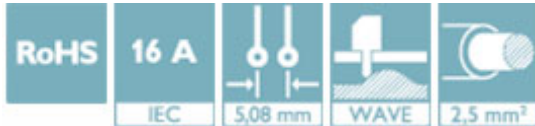

## Key Commercial Data

Packing unit	50 pc
GTIN	 4 017918 028305
GTIN	4017918028305

## Technical data

### Dimensions

Length [ l ]	14.8 mm
Width	20.28 mm
Pitch	5.08 mm
Dimension a	10.16 mm
Width [ w ]	20.28 mm
Height [ h ]	21.1 mm
Height	16 mm
Length of the solder pin	5.1 mm
Pin spacing	5.08 mm
Length	14.8 mm

### General

Range of articles	STB
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	16 A
Color	green
Stripping length	8 mm
Number of positions	3

### Standards and Regulations

Connection in acc. with standard	EN-VDE
	CSA

# Header - STB 3/3-G-5,08 - 1751031

## Technical data

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Approvals


### Approvals


#### Approvals


CSA / UL Recognized / EAC

#### Ex Approvals

### Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	13631
Nominal voltage UN		300 V	
Nominal current IN		10 A	

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
Nominal voltage UN		300 V	
Nominal current IN		10 A	

EAC		B.01742
-----	---	---------

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>