

## Reducing adapter - REDUC-K-KV-M40/M32 BK - 1410738

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Reducing adapter, Polyamide fiberglass reinforced, connecting thread: M40 x 1.5, color: black, with flat gasket

### Product Description

Reduced M40 to M32



### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 10 pc   |
| GTIN         | <br>4 046356 873192 |
| GTIN         | 4046356873192   |

### Technical data

#### Dimensions

|                                  |         |
|----------------------------------|---------|
| Length                           | 16 mm   |
| Length without connecting thread | 6 mm    |
| Connecting thread diameter       | 40 mm   |
| Wrench size, union nut           | 46 mm   |
| Hexagon angular dimension        | 50.5 mm |
| Length of the connecting thread  | 10 mm   |

#### Ambient conditions

|                                 |   |
|---------------------------------|---|
| Degree of protection (IP)       | IP65 (Depends on the screw connection used) |
| Ambient temperature (operation) | -30 °C ... 100 °C                           |

#### General

|  |                                 |
|--|---------------------------------|
| Material                               | Polyamide fiberglass reinforced |
| Outer thread                           | M40                             |
| Internal thread                        | M32                             |
| Torque                                 | 5 Nm ... 7.5 Nm                 |
| Flammability rating according to UL 94 | HB                              |

# Reducing adapter - REDUC-K-KV-M40/M32 BK - 1410738

## Technical data

### General

|       |       |
|-------|-------|
| Color | black |
|-------|-------|

### Standards and Regulations


|  |    |
|--|----|
| Halogen-free                           | no |
| Flammability rating according to UL 94 | HB |

### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

Dimensional drawing

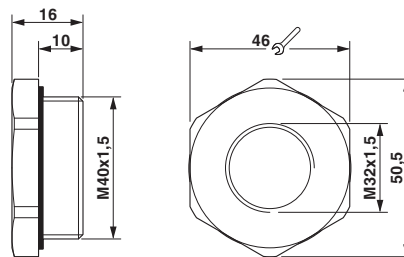

Dimensional drawing

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>