



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
C	ECN 7890: UPDATED FORMAT, PACKAGING, ROHS	4/2/15	D. DESJARDIN

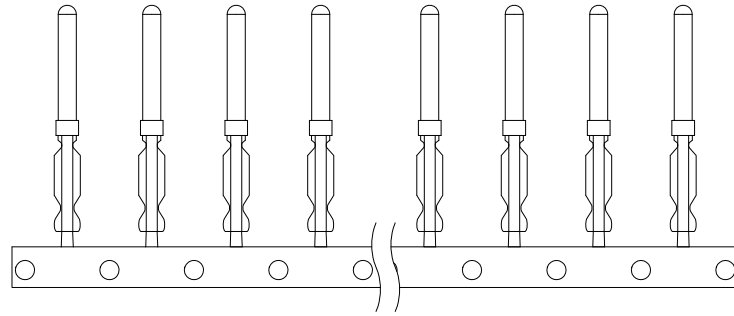

CPM
STANDARD MALE PINS, 24-28 AWG

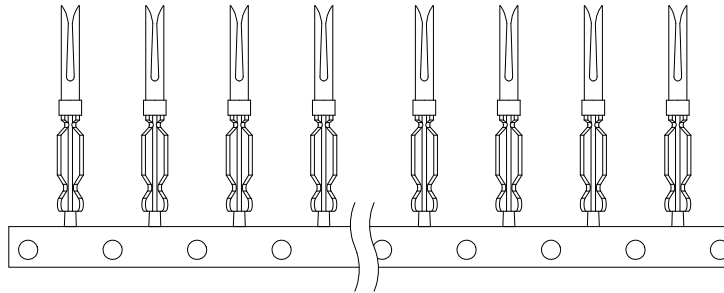

CPF
STANDARD FEMALE CONTACTS, 24-28 AWG

P/N	GENDER	QUANTITY	GOLD PLATING
CPM10	MALE	10 / STRIP	FLASH
CPF10	FEMALE	10 / STRIP	FLASH
CPM10-30U	MALE	10 / STRIP	30μINCHES
CPF10-30U	FEMALE	10 / STRIP	30μINCHES
CPM100	MALE	100 / STRIP	FLASH
CPF100	FEMALE	100 / STRIP	FLASH
CPM100-30U	MALE	100 / STRIP	30μINCHES
CPF100-30U	FEMALE	100 / STRIP	30μINCHES



NOTES:

1. 10 / STRIP CONTACTS ARE PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

2. 100 / STRIP CONTACTS ARE PACKAGED IN AN APPROPRIATELY SIZED BOX IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]</p> <p>OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / - 0 >12 [305] - 60 [1524] = +2 [51] / - 0 >60 [1524] - 120 [3048] = +4 [102] / - 0 >120 [3048] - 300 [7620] = +6 [152] / - 0 >300 [7620] = +5% / -0%</p> <p>ALL OTHER DIMENSIONAL TOLERANCES: .X = .2 [5.08] .XX = .02 [51] .XXX = .005 [13]</p>	APPROVALS	DATE	 <div>45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845</div>		
	DRAWN BY D. PARHAM	06/18/2009			
	CHECKED BY M. MARTINEZ	06/18/2009	CATEGORY	D-SUBMINIATURE	
	APPROVED BY S. SMITH	06/18/2009	PRODUCT DESCRIPTION	CRIMP CONTACT	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY				
PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CPF10	REV. C
		SCALE: 2:1	CAD FILE: CPF10.SLDRW	SHEET 1 OF 1	