


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	7/25/01	DFP
B	CORRECTED PIN CALL-OUT LOCATION (ECN1265)	12/10/02	DFP
C	ECN#2301: .5 WAS .67 AND 2.1 WAS 2.18	01/30/06	D. PARHAM
D	ECN 6795: REVISED CONTACTS TO 30U', NEW FORMAT, PACKAGING	4/15/13	D.FRISIELLO

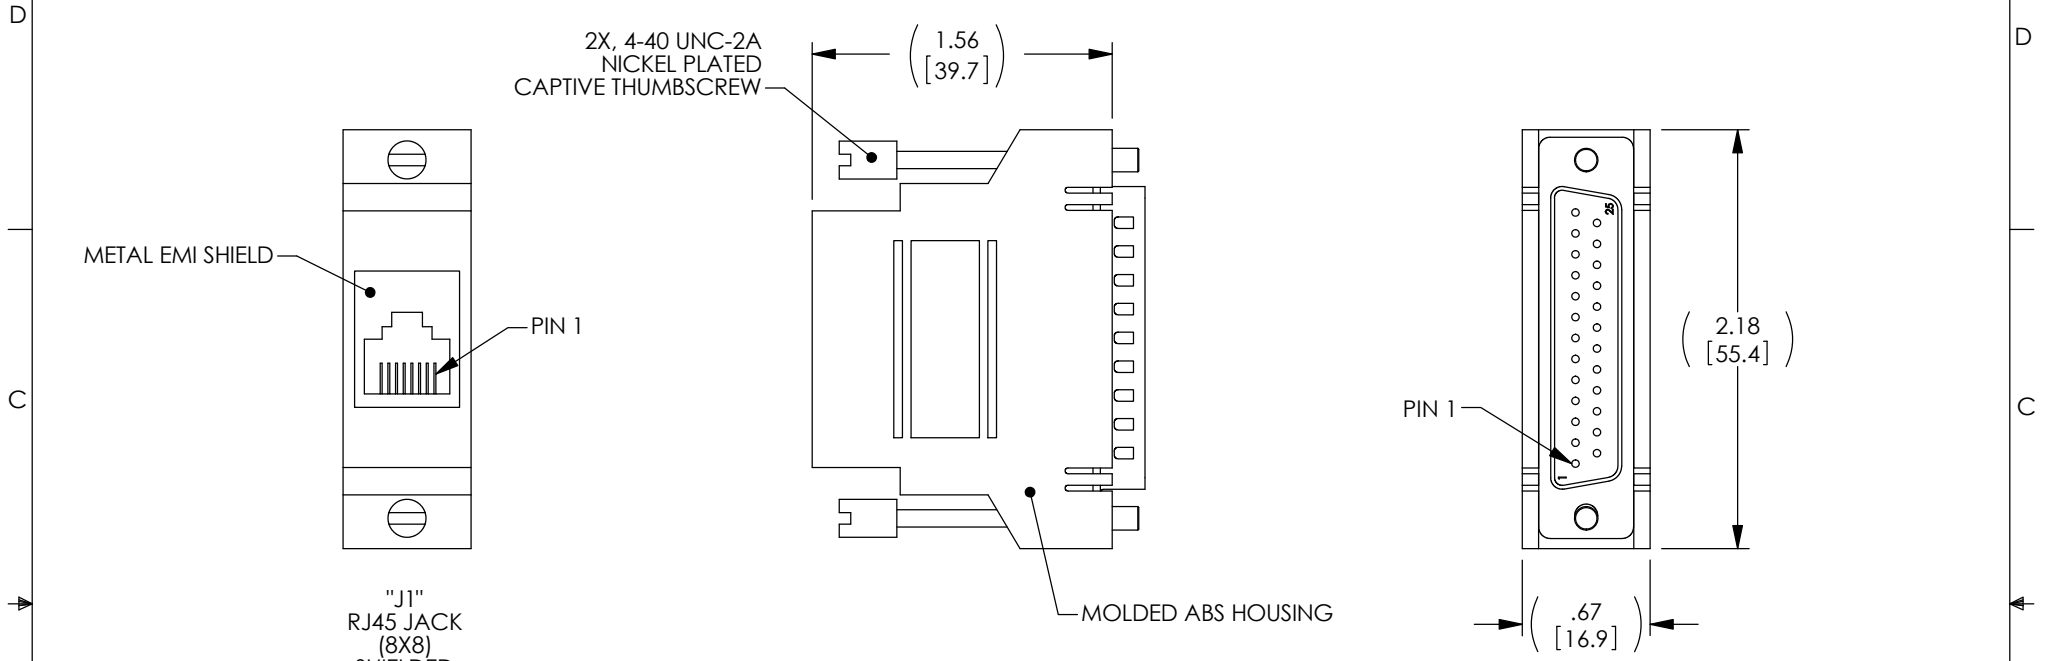

"J1"
RJ45 JACK
(8X8)
SHIELDED

"P1"
25 PIN MALE
D-SUB CONNECTOR

WIRING CHART	
"J1"	LEAD COLOR
1	BLUE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BROWN
8	WHITE

NOTES:

- MOLDED PARTS ARE 94V-0 PLASTIC, ABS, GRAY.
- CONTACTS HAVE 30 MICRO INCHES OF GOLD PLATE.
- STRANDED COPPER LEADS ARE COLOR CODED.
- ADAPTER KIT MAY BE PROGRAMMED AS NEEDED BY INSERTING AND SEATING EACH FEMALE CONTACT IN THE DESIRED POSITION IN THE D-SUB SHELL.
- D-SUB FRAME SNAPS SECURELY INTO HOUSING.
- RJ45 SHIELDING IS TIED TO D-SUB SHELL.
- ADAPTER KIT IS SUPPLIED UN-ASSEMBLED, IN A LOGO BAG PER L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D PARHAM	5/30/2001				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY T CLARK	7/18/2001	CATEGORY TELECOM/MODULAR			
	APPROVED BY R CARRICK	7/25/2001	PRODUCT DESCRIPTION ADAPTER DB25M TO RJ45 SHLD JACK			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. RS25EM18M	REV. D
			SCALE: NONE	CAD FILE: RS25EM18M.SLDDRW	SHEET 1 OF 1	