


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6792: UPDATED LOGO, DRW FORMAT, PACKAGING, ADDED PANTONE #	4/10/13	D. DESJARDIN

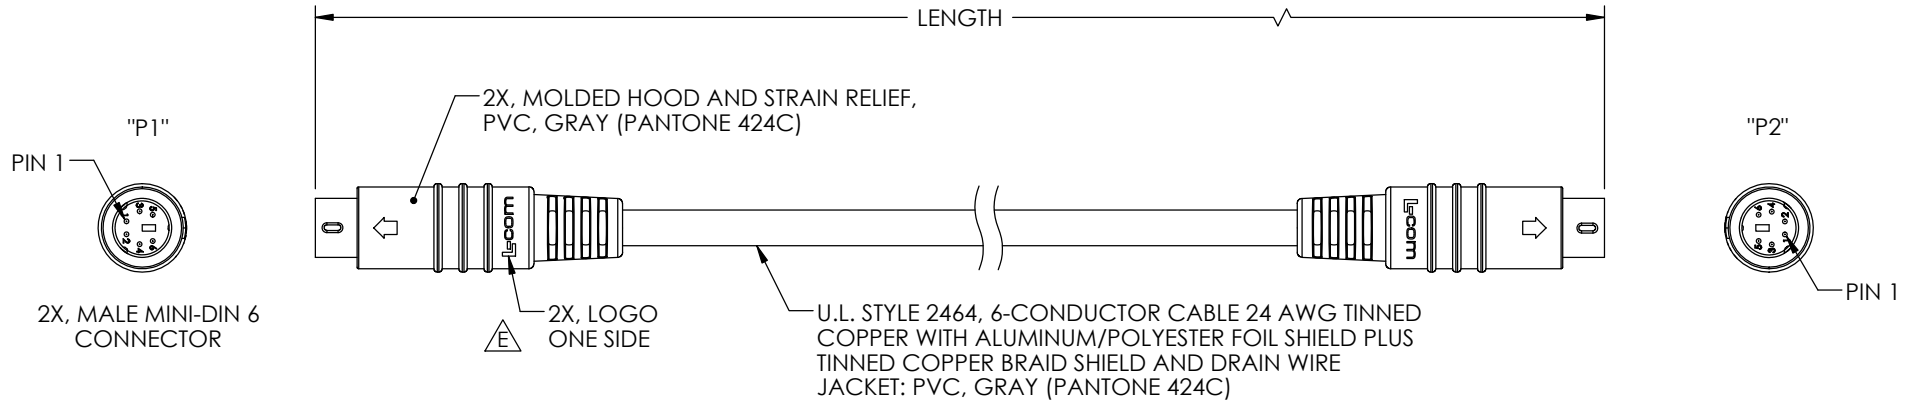

MODEL NUMBER	LENGTH	
	FEET	METERS
DK226MM-1	1.0	0.30
DK226MM-2	2.0	0.61
DK226MM-3	3.0	0.91
DK226MM-6	6.0	1.83
DK226MM-10	10.0	3.05
DK226MM-15	15.0	4.57
DK226MM-20	20.0	6.10
DK226MM-25	25.0	7.62

WIRING MAP		
"P1"	COLOR	"P2"
1	BLACK	1
2	BROWN	2
3	WHITE	3
4	ORANGE	4
5	YELLOW	5
6	LT. GREEN	6
SHELL	DRAIN	SHELL

- NOTES:
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]</p> <p>OVERALL CABLE LENGTH TOLERANCE:  <math>\leq 12</math> [305] = +1 [25] / -0  <math>&gt;12</math> [305] <math>\leq 60</math> [1524] = +2 [51] / -0  <math>&gt;60</math> [1524] <math>\leq 120</math> [3048] = +4 [102] / -0  <math>&gt;120</math> [3048] <math>\leq 300</math> [7620] = +6 [152] / -0  <math>&gt;300</math> [7620] = +3% / -0%</p> <p>ALL OTHER DIMENSIONAL TOLERANCES:  .X = ±.2  .XX = ±.02  .XXX = ±.005</p> <p>PROJECTION </p>	<p>APPROVALS</p> <p>DRAWN BY: TJC</p> <p>CHECKED BY: DFP</p> <p>APPROVED BY: RC</p>	<p>DATE</p> <p>09/02/2000</p> <p>09/02/2000</p> <p>09/02/2000</p>	<p><b>L-com</b> Global Connectivity</p> <p>45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845</p> <p>CATEGORY: I/O PRODUCTS</p> <p>PRODUCT DESCRIPTION: CBL MD6 MALE/ MD6 MALE</p>	
	<p>CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY</p>	<p>COLOR VARIATIONS MAY OCCUR</p>		<p>SIZE: <b>A</b></p> <p>FSCM NO.: <b>43321</b></p> <p>DWG. NO.: <b>DK226MM</b></p>
	<p>SCALE: NONE</p>	<p>CAD FILE: DK226MM.SLDDRW</p>		<p>REV. <b>E</b></p>
	<p>SHEET 1 OF 1</p>			