


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED WIRE MAP	12/7/11	D.FRISIELLO
D	ECN5915: REVISED VIEWS OF USB MICRO B MALE	01/10/12	DFP
E	ECN6237: ADDED CONTACT PLATING NOTE, UPDATED FORMAT.	09/17/12	DFP
E	ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO ON MICRO B END	1/13/16	S.LI

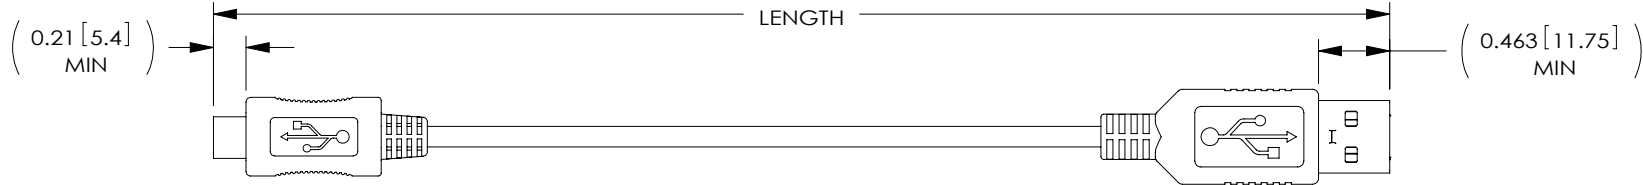


"P1"
5-PIN MICRO B PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

2X MOLDED HOOD
AND STRAIN RELIEF
PVC, BLACK

ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR
TWO 28AWG STRANDED TINNED COPPER CONDUCTORS
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN WIRE
PLUS TINNED COPPER BRAIDED SHIELD.
PVC OUTER JACKET, BLACK

PIN 1
DIELECTRIC
"P2"
SERIES "A" PLUG
CONTACTS: 30 μINCHES
GOLD PLATING

MODEL NUMBER	LENGTH METERS [FEET]
CSMUAMICB-03M	0.3 [.98]
CSMUAMICB-05M	0.5 [1.64]
CSMUAMICB-075M	0.75 [2.46]
CSMUAMICB-1M	1.0 [3.28]
CSMUAMICB-2M	2.0 [6.56]
CSMUAMICB-3M	3.0 [9.84]

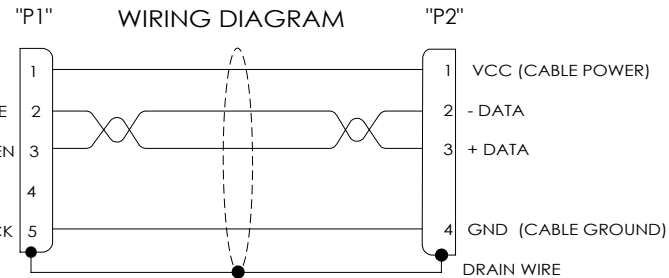

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [13]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	06/03/2010		
PROJECTION 	CHECKED BY D. CASTRO	06/03/2010	CATEGORY	
	APPROVED BY S. SMITH	06/03/2010	USB	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION			
COLOR VARIATIONS MAY OCCUR	CBL, USB-A/MICRO B			
SIZE A	FSCM NO. 43321	DWG. NO. CSMUAMICB	REV. E	
SCALE: NONE		CAD FILE: CSMUAMICB.SLDDRW		SHEET 1 OF 1