



Color: White

UPC Code: 078477180136

Country Of Origin: Please Contact Customer Service.

OSC20-M0W

Occupancy Sensor, Ceiling Mounted, Multi-technology, 24VDC, 30mA power consumption, 2000 sq ft, 360 degree (major motion: PIR: 40' diameter; U/S:64'Lx32'W, minor motion: U/S: 45'Lx23'W), red LED=PIR, green LED=U/S auto adapting, walk-through, time delay 30s-30m, test mode (6s time delay for 15m with auto exit), connect gray wire for photocell ambient light hold-off, 360 degree harmonic wheel (rotatable), mounting height 8'-10', cUL/NOM/ANCE listed, CEC Title 24 compliant. Color: off-white.

The most advanced sensor available. Combines multi-technology with all-digital architecture. Eliminates false triggering. The result is a trouble-free, "install and forget" solution for lighting control.

Technical Information

Product Features

Adjustment: Self-Adjusting

Code Compliance: California Title 24

Color: White

Coverage (Sq.Ft.): 2000

Current Consumption: 32mA

Housing Material: High-Impact, Injection Moulded Plastic

Input Voltage: 24VDC

LED Disable: LEDS Enable/LEDs Disable

Load Rating: Uses Power Pack

Manual Time Adjustment: 30s-30m, 6s Test Mode

Pattern Degrees: 360

Photo Cell: Ambient Override ON

Photo Cell Adjustment: 20 to 3000 Lux

Photocell Factory Preset: 3000 Lux (disable photocell)

Product Line: OSC20

Sensitivity Adjustment: 0 to 100 Pct

Sensitivity Factory Preset: Ultrasonic 50 Pct Infrared 75 Pct

Sensor Technology: PIR/Ultrasonic 32kHz

Sensor Type: Ceiling Mount

Single/Multi-Tech Mode: Switchable ON/OFF PIR/ULTRA

Standards and Certifications: CUL/US Cert

Technology: Multi-Technology PIR/Ultrasonic

Timer Factory Preset: 10 Minutes

Warranty: 5-Year Limited

Standards and Certifications

ANCE: Compliant

ASHRAE: Standard 90.1 Compliant

CUL/US: Listed 9034

Code Compliance: California Title 24

Current Consumption: 32mA

FCC: Compliant

Input Voltage: 24VDC

Load Rating: Uses Power Pack

NOM: 057

Output Voltage: 24VDC w/Short Circuit Protection

Title 24 Compliant: Yes

Electrical Specifications

Operating Humidity: 0 Pct to 95 Pct Relative, Non-Condensing

Operating Temperature: 32F to 104F 0C to 40C

Voltage: 24 VDC

Material Specifications

Color: White

Housing Material: High-Impact, Injection Moulded Plastic

LED Indicator: Red Infrared Motion & Green Ultrasonic Motion

PIR Lens Type: Extended Range

Qty of Transducer Pairs: 2

Sensor Weight: 5oz/142g

Transducer Size: 16 mm Diameter

Wire Leads: Color Coded 6 Inch

Mechanical Specifications

Coverage (Sq.Ft.): 2000

Major Motion Area: 64X32 Feet

Minor Motion Area: 45X23 Feet

Pattern Degrees: 360

Photo Cell: Ambient Override ON

Sensor Technology: PIR/Ultrasonic 32kHz

Features and Benefits

- Small Size: Installed sensor appears almost invisible.
- Fast Simple Installation: Easy ceiling mount, three wire connection (low voltage)


and twist-lock sensor attachment.

- Accurate, Consistant Switching: Occupant complaints are eliminated; lights are on when room is occupied, off when empty. annoying false-offs are minimized and lights on at night is eliminated.
- Self-Adapting: An internal microprocessor continually analyzes, evaluates and adjusts settings. Performance is kept at a maximum and user complaints are eliminated.
- Maximum Reliability, Low Cost: All digital circuitry uses a minimum of components.
- Non-Volatile Memory: Learned and adjusted settings saved in protected memory. Power outages will not cause status loss.
- Ambient Light Recognition: The photocell prevents lights from turning on when room is adequately lit by natural light.
- Excellent Warranty: 5-Year Limited warranty.
- Typical Applications: Cafeteria, Computer Room, Office w/Cubicles, Office Open, File Room, Classroom, Lounge, All Restroom types, Open Area, or Gymnasium

Patents*

CA115944	US8312347
CA122495	USD561630
MX24023	USD573053
US7800049	

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

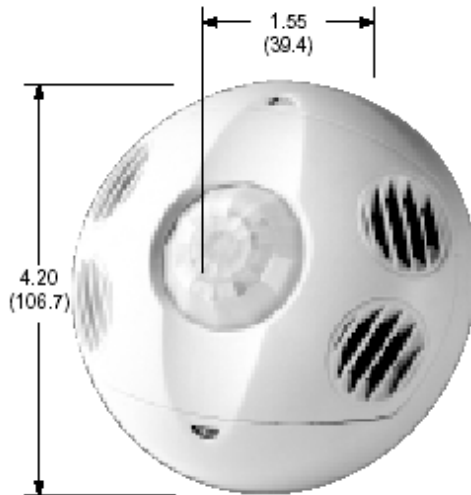

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

