



Datasheet

5mm Pitch 45° Rising Clamp Terminal

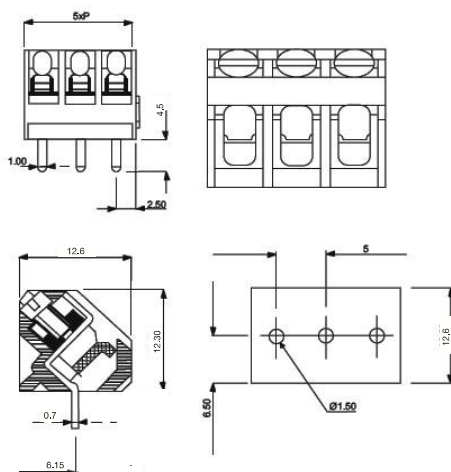

| TYPE NO. | POLES | LENGTH |
|----------|-------|--------|
| 8970884 | 2 | 10mm |
| 8970887 | 3 | 15mm |
| 8970881 | 4 | 20mm |
| 8970890 | 5 | 25mm |
| 8970893 | 6 | 30mm |
| 8970897 | 7 | 35mm |
| 8970907 | 8 | 40mm |
| 8970900 | 9 | 45mm |
| 8970904 | 10 | 50mm |
| 8970913 | 11 | 55mm |
| 8970916 | 12 | 60mm |

- 2-12 pole interlocking
- Moulded in black
UL94-V0 Flame retardant PA66
- Professional rising clamp terminal
- 0.2-3.3mm² (24-12 AWG)
-  us approved

SPECIFICATION

| | |
|---------------------------|---------------------------------|
| Rating | 15A 300V |
| Insulation resistance | 5000MΩ/1000V |
| Withstand Voltage | AC2000V/1min |
| Contact Resistance | 20mΩ |
| Working Temperature | -33°C to +120°C |
| Mouldings | UL94-V0 flame retardant PA66 |
| Screw/Torque | M2.5 Steel, Nickel Plated 0.4Nm |
| Recommended PCB hole size | Ø1.2mm-1.4mm |