

## VALVES SERIES 70, PNEUMATIC

TECHNICAL DATA	1/8"	1/4"	3/8"	1/2"
Operating pressure	bar Vacuum to 10			
Minimum pilot pressure				
• monostable	bar 2.5			
• bistable	bar 1			
Operating temperature range	°C -10 to +60			
Nominal diameter	mm 5	7.5	13.3	15
Conductance C	Nl/min · bar 121.43	264.26	505.52	971.43
Critical ratio b	bar/bar 0.32	0.27	0.32	0.43
Flow rate at 6 bar ΔP 0.5 bar	Nl/min 400	750	1560	3200
Flow rate at 6 bar ΔP 1 bar	Nl/min 550	1100	2150	4600
TRA / TRR monostable at 6 bar	ms 6/15	7/15	5/28	16/46
TRA / TRR bistable at 6 bar	ms 7/7	7/7	13/13	16/16
Hand operation	-	-	-	*



\* Monostable on valve body

DISTRIBUTORS

VALVES SERIES 70, PNEUMATIC


### SYNOPTIC, SIZES AND VERSIONS

PNV FAMILY	2 DIMENSIONS	3 FUNCTION	PN OPERATORS 14	S RESETTING (12)	NC FURTHER DETAILS
PNV pneumatic valves	2 1/8"	3 3/2	PN pneumatic	S mechanical springs	OO 5/2
	3 1/4"	5 5/2		B bistable	NC normally closed
	C 3/8"	6 5/3		D differential	NO normally open
	4 1/2"	■ 8 2-3/2		O stable for 5/3	CC closed centres
				◆ A pneumatic/mechanical spring	OC open centres
					PC pressure centres
					▲ NC-NO normally closed - normally open


- Only available for size 1/8" and 1/4"
- ◆ On demand
- ▲ Only available for function 2-3/2

## VALVES SERIES 70, PNEUMATIC, 1/8"

### MONOSTABLE 3/2 NO, 1/8"

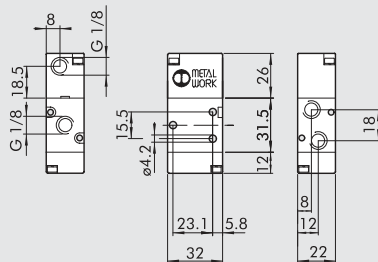

### MONOSTABLE 3/2 NC, 1/8"

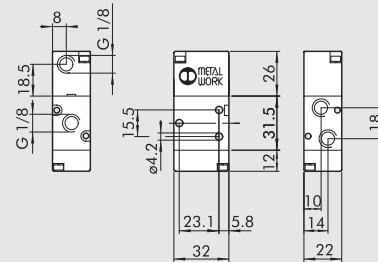

Symbol	Code	Abbrev.	Weight [g]
	7010010400	PNV 23 PNS NO	82

Symbol	Code	Abbrev.	Weight [g]
	7010010200	PNV 23 PNS NC	82