


## 80054

Miniature Bi-Pin Base, G4, G6.35, GY6.35, GX5.3 MR16, GZ4 MR11, Halogen, Incandescent, Ceramic Body Lampholder, Mounting Holes, , Side Wired, - White

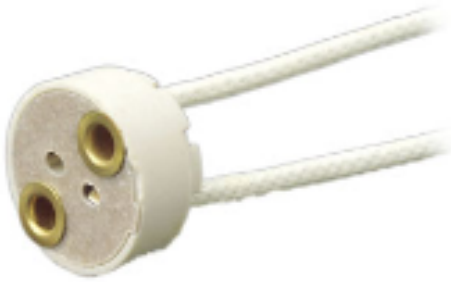

**UPC Code:** 078477833520

**Country Of Origin:** Please Contact Customer Service.

### Technical Information

#### Mechanical Specifications

**Max. Amperage:** 12 Amp

**Max. Voltage:** 250 Volt

**Max. Wattage Rating:** 750W

**Termination:** 12-Inch 18AWG SEW-1  
200C Glass Braided

#### Product Features

**ANSI Lamp Type:** G4, G6.35, GY6.35,  
GX5.3 MR16, GZ4 MR11

**Access:** Side Wired

**Availability:** OEM Only

**Body Material:** Ceramic Body

**Color:** White

**Contact Material:** Nickel-Plated Copper-  
Alloy

**Cover Material:** Mica

**Lamp Base:** Miniature

**Lamp Contacts:** Bi-Pin

**Lamp Socket Base:** Miniature Bi-Pin

**Light Type:** Quartz Halogen

**Mounting Type:** Mounting Holes

**Standards and Certifications:** UL/CSA

**Termination:** 12-Inch 18AWG SEW-1  
200C Glass Braided

**Warranty:** 1 Year Limited

#### Material Specifications

**ANSI Lamp Type:** G4, G6.35, GY6.35,  
GX5.3 MR16, GZ4 MR11

**Access:** Side Wired

**Lamp Socket Base:** Miniature Bi-Pin

**Shell Material:** Ceramic

**Termination:** 12-Inch 18AWG SEW-1  
200C Glass Braided

**Wire Strip Length:** 1/2 Inch


#### Standards and Certifications

**CSA Certified:** File LR-1863

**UL Recognized:** Component E13405

### Features and Benefits

- WARNING: Miniature Quartz Halogen Lamps operate under pressure and high temperatures. To prevent socket damage, the design of the fixture and its application must be carefully considered. For Leviton warranties to apply to this product, lamp wattage, current and beam spread must be controlled to insure that the following temperature limits are never exceeded.
- At contacts within socket - 225C
- Socket lead wires - 200C
- NOTE: Maximum rating of 250C available when appropriately rated leads are used.

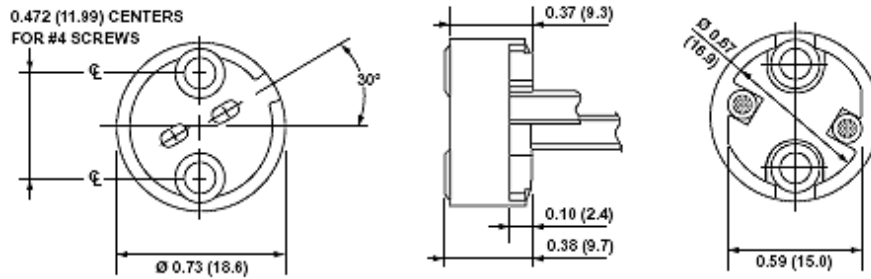

**SPECIFICATION SUBMITTAL**

JOB NAME:		CATALOG NUMBERS:	
<input type="text"/>		<input type="text"/>	
JOB NUMBER:			
<input type="text"/>		<input type="text"/>	

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

