

# Spezifikation für Freigabe / specification for release

Kunde / customer : \_\_\_\_\_

Artikelnummer / part number : **744741471**

LF



RoHS compliant




WÜRTH ELEKTRONIK

Bezeichnung : **Tonneninduktivität WE-TI**

description : **Filter Choke WE-TI**

DATUM / DATE : 2004-11-30

## A Mechanische Abmessungen / dimensions:

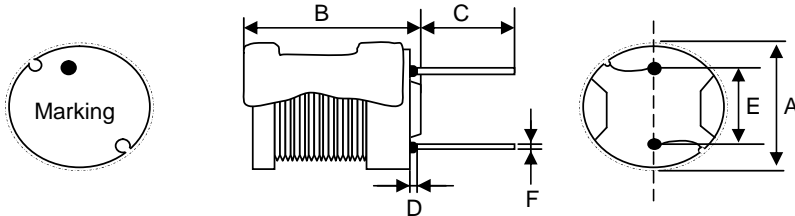

8 X 5,5		
A	<b>8 ± 0,5</b>	mm
B	<b>5,5 ± 0,5</b>	mm
C	<b>5,0 ± 1,0</b>	mm
D	<b>1,0 max.</b>	mm
E	<b>5,0 ± 0,5</b>	mm
F	<b>∅ 0,65 ref</b>	mm

● = Start of winding      Marking = Inductance code

## B Elektrische Eigenschaften / electrical properties:

Eigenschaften / properties	Testbedingungen / test conditions		Wert / value	Einheit / unit	tol.
Leerlauf-Induktivität / inductance	1 kHz / 0,25V	L <sub>0</sub>	<b>470</b>	μH	±10%
Nenn-Induktivität / nominal inductance	1 kHz/0,25V/IN	L <sub>N</sub>		μH	typ.
DC-Widerstand / DC-resistance	@20°C	R <sub>DC max.</sub>	<b>3,00</b>	Ω	max.
Nennstrom / nominal current	ΔT=40 K	I <sub>N</sub>	<b>440</b>	mA	max.
Sättigungsstrom / saturating current	ΔL/L <sub>0</sub>  -10%	I <sub>sat</sub>	<b>400</b>	mA	typ.

## D Prüfgeräte / test equipment:

HP 4274 A & HP E3633 A für/for L<sub>0</sub>

HP 34401 A für/for I<sub>N</sub> und/and R<sub>DC</sub>

## E Testbedingungen / test conditions:

Luftfeuchtigkeit / humidity: 33%

Umgebungstemperatur / temperature: +20°C

## F Werkstoffe & Zulassungen / material & approvals

Basismaterial / base material: Ferrit/ferrite

Draht / wire: 2-UEW 155°C

shrink tube: PVC

## G Eigenschaften / general specifications:

Lagertemperatur / storage temperature: -25°C - + 85°C

Betriebstemp. / operating temperature: -25°C - +85°C

It is recommended that the temperature of the part does not exceed 85°C under worst case operating conditions.

Freigabe erteilt / general release:	Kunde / customer			
Datum / date	Unterschrift / signature			
	Würth Elektronik			
		ME	Version 2	04-11-30
		ME	Version 1	04-08-10
Geprüft / checked	Kontrolliert / approved	Name	Änderung / modification	Datum / date

Würth Elektronik eiSos GmbH & Co.KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400  
http://www.we-online.com

# Spezifikation für Freigabe / specification for release

Kunde / customer : \_\_\_\_\_

Artikelnummer / part number : **744741471**

LF



RoHS compliant




Bezeichnung : **Tonneninduktivität WE-TI**

description : **Filter Choke WE-TI**

DATUM / DATE : 2004-11-30

## H Induktivitätskurve / Inductance curve :

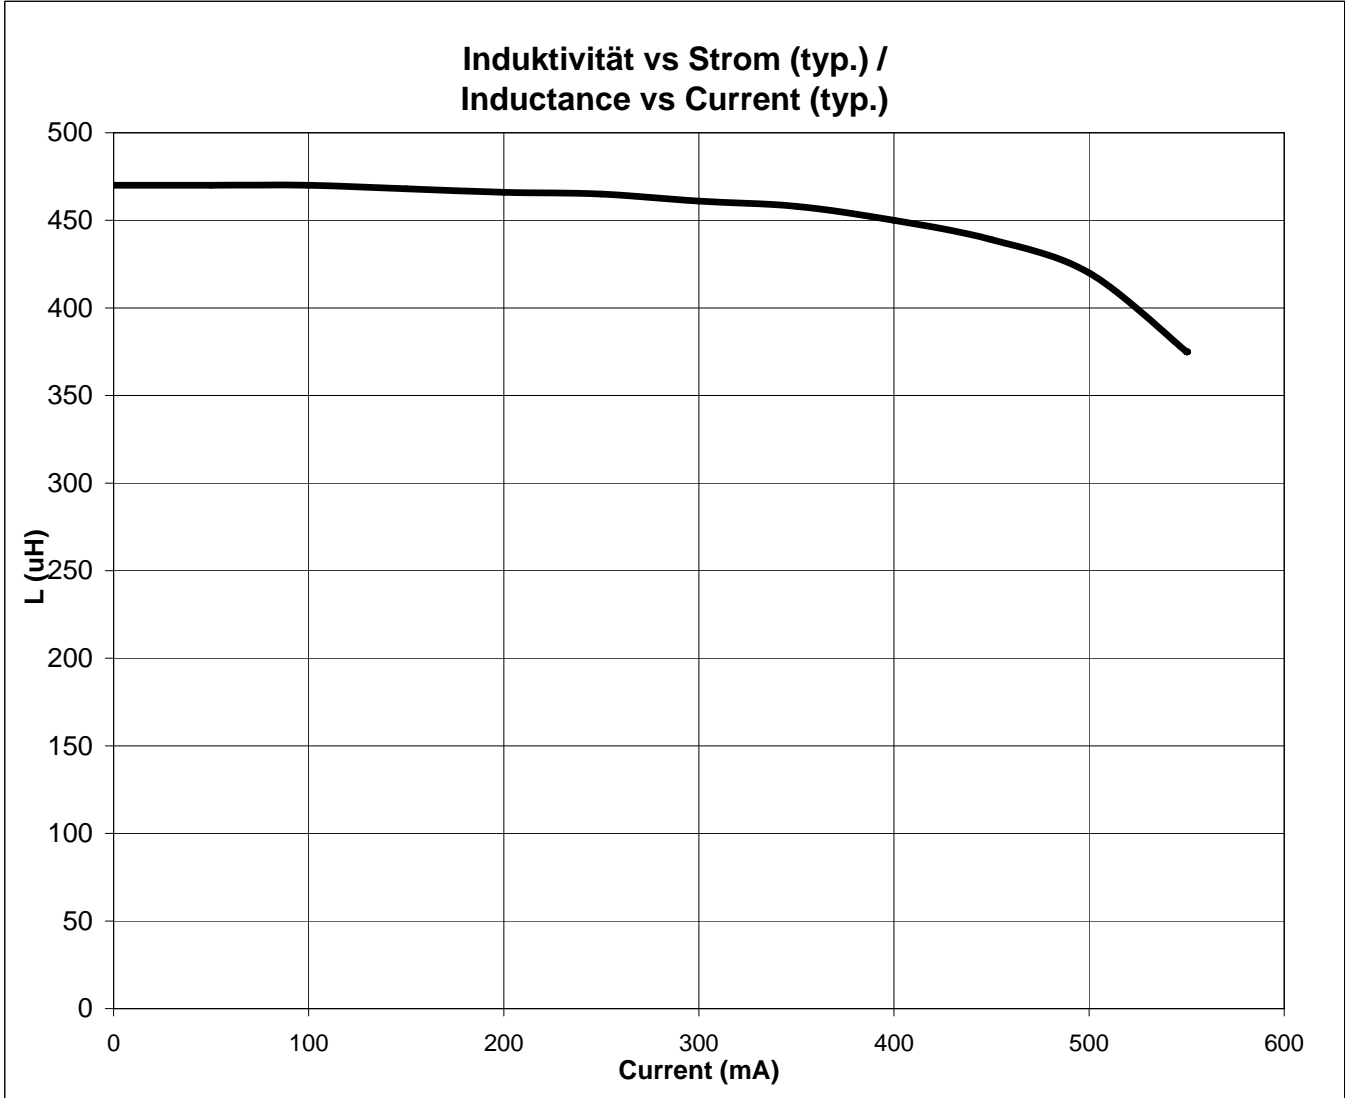

Freigabe erteilt / general release:	<b>Kunde / customer</b>			
	..... Datum / date	..... Unterschrift / signature		
..... Geprüft / checked	<b>Würth Elektronik</b>			
	..... Kontrolliert / approved	ME	Version 2	04-11-30
		ME	Version 1	04-08-10
		Name	Änderung / modification	Datum / date

This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before use. It is essential to give consideration when to install a protective circuit at the design stage.

### Würth Elektronik eiSos GmbH & Co.KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 - 3 · Germany · Telefon (+49) (0) 7942 - 945 - 0 · Telefax (+49) (0) 7942 - 945 - 400  
<http://www.we-online.com>