





Professionally approved products.

## Datasheet

# Illuminated Red SPST Rocker Switch

RS Stock number [419-766](#)

Dimensions: (mm)

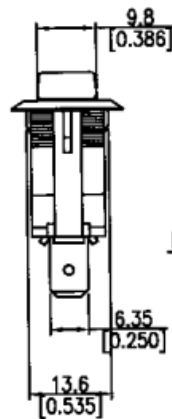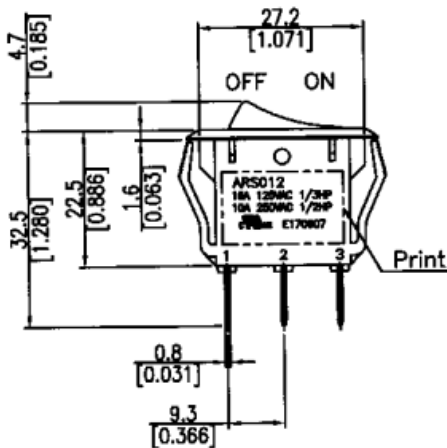

Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP		Mount Hole	Circuit Structure											
Contact R	50m ohm Max.														
Insulation R	DC 500V 100M ohm Min.														
Dielectric Strength	AC 1500V 1 minute														
Circuit	3P SPST ON-OFF (Illuminated)														
		<table border="1"> <thead> <tr> <th>Thickness</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>0.75...3</td> <td>27.6-0.1</td> <td>13.8+0.1</td> </tr> <tr> <td>3...4</td> <td>27.8-0.1</td> <td>13.8+0.1</td> </tr> <tr> <td>4...5</td> <td>28.0-0.1</td> <td>13.8+0.1</td> </tr> </tbody> </table>	Thickness	X	Y	0.75...3	27.6-0.1	13.8+0.1	3...4	27.8-0.1	13.8+0.1	4...5	28.0-0.1	13.8+0.1	
Thickness	X	Y													
0.75...3	27.6-0.1	13.8+0.1													
3...4	27.8-0.1	13.8+0.1													
4...5	28.0-0.1	13.8+0.1													

Frame: Nylon 66 ( Black)

Actuator: PC (Red)