


Professionally approved products.

Datasheet

IP67 SPDT Toggle Switch On-On, 0.4 VA, PCB

RS Stock number [734-7246](#)

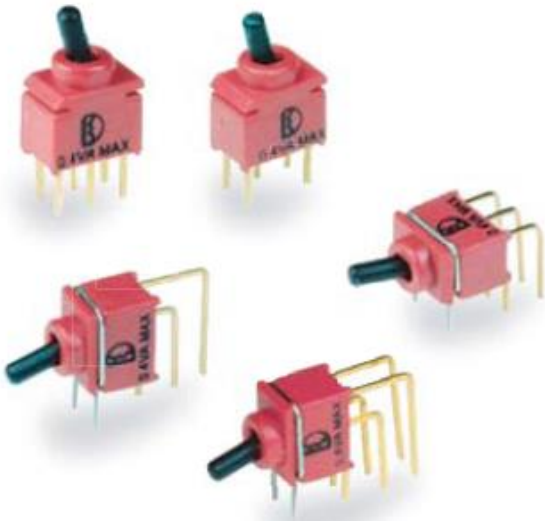

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RATING: 0.4 VA max. @ 20 V AC or DC max.

CONTACT RESISTANCE: Below 100 mΩ typ. initial @ 2-4 V DC,
100 mA.

INSULATION RESISTANCE: 500 MΩ min.

DIELECTRIC STRENGTH: 500 Vrms min.@ sea level.

OPERATING TEMPERATURE: -30°C to 85°C

MATERIALS

HOUSING AND BASE: Glass filled nylon 6/6 or 4/6, flame retardant
, heat stabilized (UL94V-0)

ACTUATOR: Glass filled nylon 6/6, flame retardant, heat stabilized
(UL94V-0), with standard internal o-ring seal.

SWITCH SUPPORT: Steel,with Sn plate.

CONTACT / TERMINALS: Gold plated Copper alloy.

Professionally approved products.

Datasheet


SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
		POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	2US1	ON	NONE	ON	5-6	N/A	5-4
	2US3	ON	OFF	ON	5 (COMM) 4-5	OPEN	5 (COMM) 4-5
	2US9	OFF	NONE	ON	OPEN	N/A	4-6 4-5
DP	2UD1	ON	NONE	ON	2-3,5-6	N/A	2-1,5-4
	2UD3	ON	OFF	ON	2 (COMM) 1-2 4-5	OPEN	2 (COMM) 1-2 4-5
	2UD9	OFF	NONE	ON	OPEN	N/A	1-3 4-6

MOM=MOMENTARY


POLE OPTIONS

M2

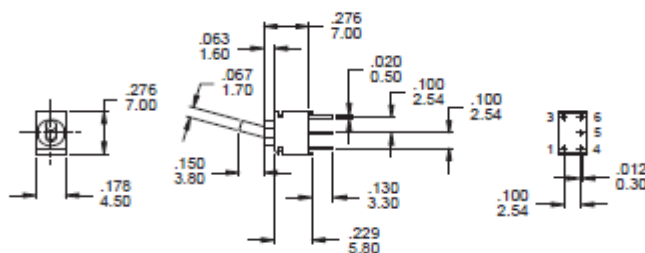


Part No. Shown : 2US1T1A1M2RE

P.C. MOUNTING




SPDT

M2

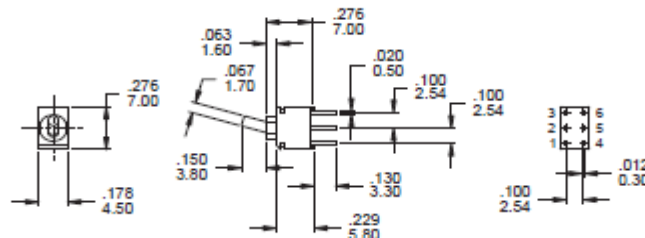


Part No. Shown : 2UD1T1A1M2RE

P.C. MOUNTING




DPDT

MZ

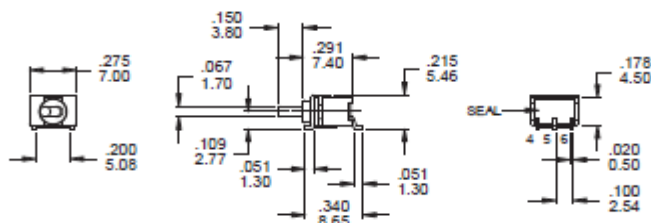

Part No. Shown : 2US1T1A1MZRE


P.C. MOUNTING




SPDT

Professionally approved products. Datasheet

M6

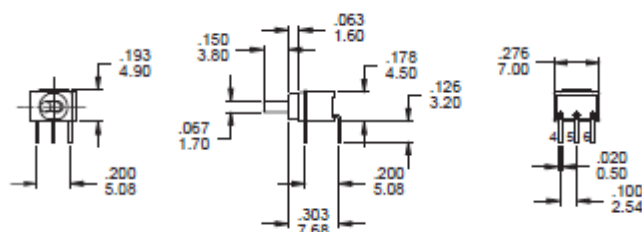


P.C. MOUNTING




SPDT

Part No. Shown : 2US1T1A1M6RE

M6

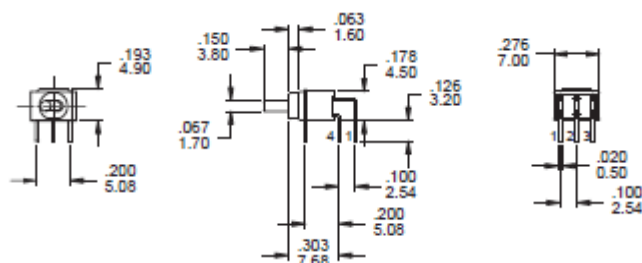


P.C. MOUNTING




DPDT

Part No. Shown : 2UD1T1A1M6RE

M7

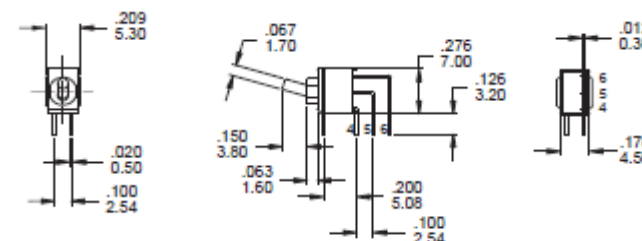



P.C. MOUNTING




SPDT

Part No. Shown : 2US1T1A1M7RE

M7

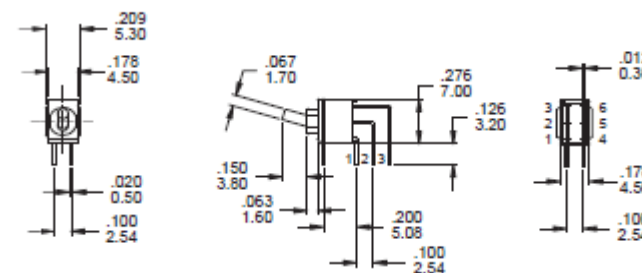

P.C. MOUNTING



DPDT

Part No. Shown : 2UD1T1A1M7RE

Professionally approved products.

Datasheet

SOLDERING PROCESSES

WAVE SOLDERING: Recommended Soldering Temperature: $260 \pm 5^{\circ}\text{C}$

Duration of Solder Immersion: Max 5 sec.

(PCB is 1.6mm in thickness)

SOLDERING: Vapor phase

Temperature Profile

Zone	Room Temperature	Time (Sec)
Pre-heat (A)	150°C	Min 120s
Soak (B)	180°C ~ 200°C	Min 150s
Peak (C)	200°C ~ 235°C	Min 30s
Peak (D)	235°C ~ 260°C	Min 40s
Peak (E)	260°C	Max 5s

