

**Professionally approved products.**

## **Datasheet**

### **PCB Slide Switch SPDT On-On 0.4 VA @ 20V ac/dc**

RS Stock number [429-498](#)



## **SPECIFICATIONS**

**CONTACT RATING:** Dependent upon contact material

**MECHANICAL LIFE:** 30,000 make-and-break cycles.

**CONTACT RESISTANCE:** 20m $\Omega$  max. initial @ 2-4VDC  
100mA for both silver and gold plated contacts.

**INSULATION RESISTANCE:** 1,000M $\Omega$  min.

**DIELECTRIC STRENGTH:** 1,000 V RMS@sea level.

**OPERATING TEMPERATURE:** -30°C to 85°C.

## **MATERIALS**

**CASE** - Diallyl phthalate (DAP)(UL94V-0)

**HOUSING** - Brass, tin plated

**ACTUATOR** - Nylon, black.

**CONTACT** - Silver or gold plated.

**TERMINALS** - Copper alloy, with silver and gold plated.

# Professionally approved products.


## Datasheet

### SWITCH FUNCTION



NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	Q2511	5FS1	ON	NONE	ON		OPEN	
	Q2512	5FS2	ON	NONE	MOM			
	Q2513	5FS3	ON	OFF	ON			
DP	Q2521	5FD1	ON	NONE	ON		OPEN	
	Q2523	5FD3	ON	OFF	ON			

MOM=MENTORY


### POLE OPTIONS


**SPDT**


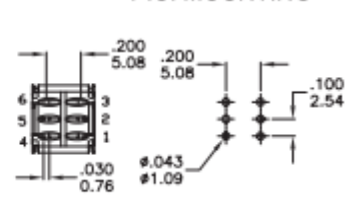

Part No. Shown : 5FS1S102M2QE



Waterproof transparent cover


**DPDT**


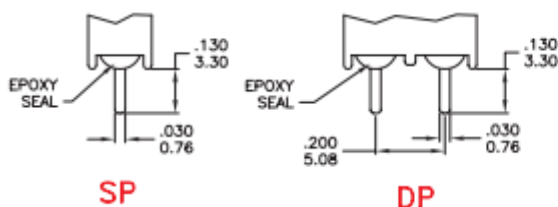
Part No. Shown : 5FD1S102M2QE



P.C. MOUNTING

### TERMINATION OPTIONS

#### M2 PC THRU-HOLE





**SP**
**DP**

#### OTHER TERMINATION OPTIONS


- M6 RIGHT ANGLE P.C. MOUNT
- M6N SNAP - IN RIGHT ANGLE P.C. MOUNT

# Professionally approved products. Datasheet

M6






P.C. MOUNTING




SPDT

Part No. Shown : 5FS1S102M6QE

M6






P.C. MOUNTING




DPDT

Part No. Shown : 5FD1S102M6QE

MZ






P.C. MOUNTING




SPDT

Part No. Shown : 5FS1S102MZRES

M7



P.C. MOUNTING




SPDT

Part No. Shown : 5FS1S102M7NRES

## SNAP-IN TERMINATION OPTIONS

M6N



## Professionally approved products. Datasheet

### CONTACT MATERIAL OPTIONS

Q=Silver	<b>Q.C.S.K</b>	<b>R.G</b>
R=Gold		
G=Gold,tin-lead	FIXED TERMINAL: Silver plated over copper alloy MOVABLE CONTACT: Silver plated over copper alloy	FIXED TERMINAL: Copper alloy with gold plated over nickel plated MOVABLE CONTACT: Copper alloy with gold plated over nickel plated
S=Silver,tin-lead		
C=Gold over silver	RATING: 3 Amps with resistant load @ 120VAC or 28VDC 1 Amps with resistant load @ 250VAC	RATING: 0.4 Volt-Amps(VA)max. @ 20V max. (AC or DC)
K=Gold over silver ,tin-lead		



### SOLDERING PROCESSES

**MANUAL SOLDERING** : Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

**WAVE SOLDERING** : Recommended Soldering Temperature: 260±5°C  
Duration of Solder Immersion: 5 ±1 seconds  
(PCB is 1.6mm in thickness)

**SOLDERING** : Vapor phase

### Temperature Profile

Zone	Room temperature	Time ( Sec )
Pre-heat ( A )	150°C	Min 120s
Soak ( B )	180°C~200°C	Min 150s
Peak ( C )	200°C~235°C	Min 30s
Peak ( D )	235°C~260°C	Min 40s
Peak ( E )	260°C	Max 10s

