

### Professionally approved products.


## **Datasheet** Anti Surge T HBC Min Fuse, 32A, 6.3x32mm

RS Stock number 247-4021

## **Cylindrical Miniature** fuse-links

Abmessungen Dimensions

Artikel-Nummer: Article-Number:	189140.
Größe: Size:	6,3 x 32 mm
Bemessungsstrom: Rated current:	100 mA - 32 A



Aufbau Construction

Isolierrohr: Insulating tube: Keramic / undurchsichtig Ceramic / non transparent mit Löschmittelfüllung with extinguishing filler

Kontaktkappen: Contact caps:

Kupferlegierung, vernickelt Copper alloy, nickel-plated

#### Schmelzzeitgrenzwerte:

Fusing time limits:


Bemessungsstrom	1,5 x I <sub>N</sub>	2,1 x I <sub>N</sub>					10 x I <sub>N</sub>	
Rated current	min.	max.	min.	max.	min.	max.	min.	max.
100 mA - 1,6 A	1 h	30 min	400 ms	80 s	95 ms	5 s	10 ms	300 ms
2 A - 32 A	1 h	30 min	400 ms	80 s	150 ms	5 s	20 ms	300 ms

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.



# Professionally approved products. Datasheet

## **Time-Current Curves**

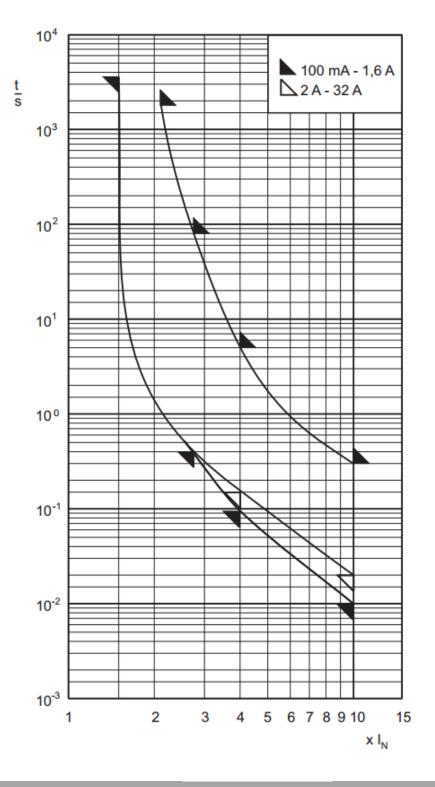

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.

EN