

Modular Signal Towers / KombiSIGN 72  
**Siren element 8 tne 24VAC/DC BK**



|                  |                     |
|------------------|---------------------|
| <b>Part No.:</b> | <b>645.890.75</b>   |
| <b>Series:</b>   | <b>KombiSIGN 71</b> |



| <b>MECHANICAL DATA</b>      |                 |
|-----------------------------|-----------------|
| Height                      | 54 mm           |
| Diameter                    | 70 mm           |
| Materials                   | PC              |
| Housing colour              | Black           |
| Protection category         | IP65            |
| Service life optical        | 5,000 h minimum |
| Acoustic service life       | 5,000 h minimum |
| Working temperature minimum | -30°C           |
| Working temperature maximum | +50°C           |
| UL Type Rating              | Type 12         |
| Weight with packaging       | 93 g            |
| Product weight              | 74 g            |

| <b>ELECTRICAL DATA</b>      |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage type      | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 30 mA              |
| Rated inrush current        | 250 mA             |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |


| <b>ACUSTICAL DATA</b>         |                |
|-------------------------------|----------------|
| Volume/dB(max) at 1m distance | 102,0 dB dB(A) |
| Acoustic signal image         | Multi-tone     |
| Number of tones               | 8 tone         |
| Volume adjustable             | Switch         |
| Volume adjustment range       | 92 - 102 DB    |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72  
**Siren element 8 tne 24VAC/DC BK**

**DRAWING**

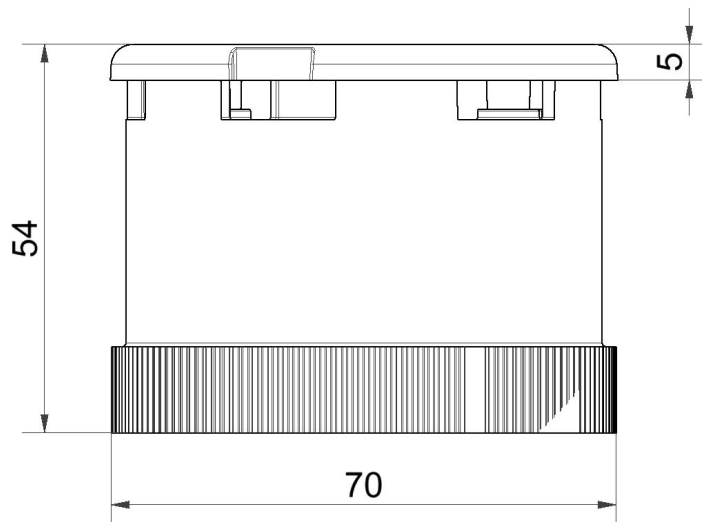

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.