Model 500
1/2" Panel Mount, Non-Relampable LED Snap Mount Indicator

The 500 Model incorporates a non-relampable T-1 3/4 size LED or incandescent lamp. Snap fits, needs no mounting hardware. Transparent lens for maximum viewing angle.

- Snaps mounts in 1/2" (0.500") diameter hole
- Supplied standard with 6" wire leads (18 AWG), or .187" QC terminals
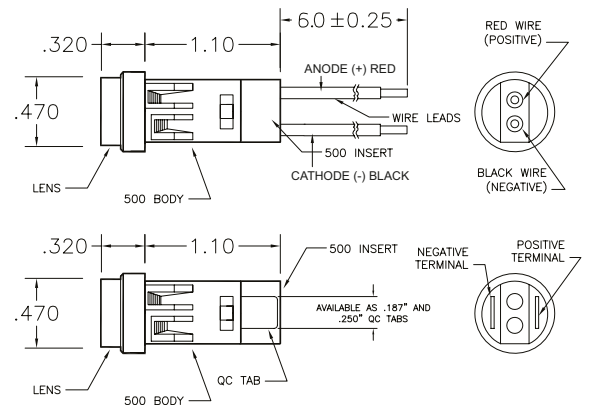- Fits 1/8" panel thickness

Specifications

LED size	5 mm
Lens color	Waterclear

Warm Colors

LED color	Red	Yellow	Amber
Typical luminous intensity	500 MCD	400 MCD	380 MCD
Viewing angle	40°	110°	100°
Wavelength	R660	Y595	O610

Cool Colors

LED color	Green	Ultra Green	Ultra Blue	White
Typical luminous intensity	16 MCD	2200 MCD	650 MCD	6000 MCD
Viewing angle	40°	30°	30°	50°
Wavelength	G565	G525	B470	-

All dimensions are in inches.

HOW TO ORDER: INCANDESCENT			
6" Lead Termination		0.187" QC Termination	
Part number	Voltage	Part number	Voltage
5001-5X6	5 VDC	5001-5XQC	5 VDC
5001-12X6	12 VDC	5001-12XQC	12 VDC
5001-24X6	24 VDC	5001-24XQC	24 VDC
5001-28X6	28 VDC	5001-28XQC	28 VDC

Where the 'X' appears insert: 1-Red, 2-Green, 3-Yellow, 4-Amber, 5-Ultra Green, 6-Ultra Blue, 7-Pure White

HOW TO ORDER: LED			
6" Lead Termination		0.250" QC Termination	
Part number	Voltage	Part number	Voltage
5002-5X6	5 VDC	5002-5XQC	5 VDC
5002-12X6	12 VDC	5002-12XQC	12 VDC
5002-24X6	24 VDC	5002-24XQC	24 VDC
5002-28X6	28 VDC	5002-28XQC	28 VDC
5002-120X6	120 VAC		

Where the 'X' appears insert: 1-Red, 2-Green, 3-Yellow, 4-Amber, 5-Ultra Green, 6-Ultra Blue, 7-Pure White

SloanLED®
Leaders in LED Technology