





IR2.53SMRAMP

▶ ANGLE FIBER OPTICS

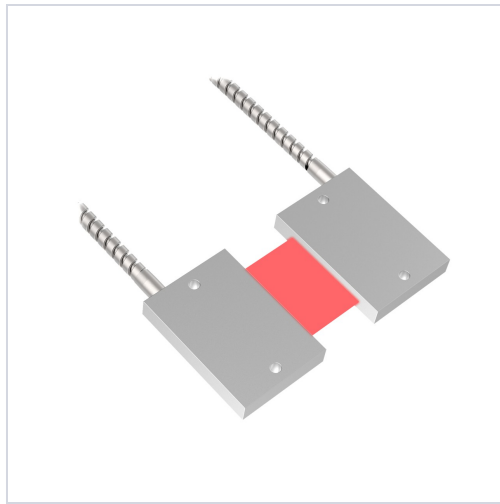

Opposed Mode Individual Glass Fiber .91m long
 3.96 mm dia. Bundle
 Stainless Steel Sheath
 Rectangular Sensing Tip; Side Exit Array
 38.1 mm Length X 0.25 mm Width
 Part Number: 20166



SPECIFICATIONS

Housing Style	Rectangular
Quantity Included	1
Fiber Optic Type	Glass
Sensing Mode (General)	Opposed
Sensing Mode (Detailed)	Array
Beam Exit	Right Angle
Sensing End Material (Specific)	Stainless Steel

Fiber Sheathing Material (Jacket)	Stainless Steel Monocoil
Fiber Sensing End Tip	Array
Fiber Length (m)	0.914
Fiber Sensing End Size	44.5 x 63.5 mm
Sensing End Segment 1	Rectangle
Sensing End Segment 2	Sideview
Sensing End Segment 3	Array
Array Length (mm)	38.1
Retractable	No
Flex Relief	No
Core Diameter (mm)	3.96
Minimum Bend Radius (mm)	19
Termination	Terminated
Max Temp (°C)	249
Integrated Lens	No
Feature: Chemical Resistant	No
Feature: Extended Range	No
Feature: Small Object Detection	No
Application: Liquid Level	No
Application: Vacuum Feed Through	No
Fiber Sensing End Size - Mounting Area	44.5 x 63.5 mm
Termination Type	Glass Fiber Sensors
Tariff Fiber Meters (fbm)	4893.07



Banner Engineering Corp. | 9714 Tenth Avenue North | Minneapolis, MN 55441 | United States of America