




LS SERIES

FLEXIBLE LED LIGHTING STRIPS

Technical Information	Colour	Colour Temp (White only)	Light Output Lumens/m	Part Number
<ul style="list-style-type: none"> • LED: SMD3528 60LED/M • Voltage: 24VDC • Current: 600mA • Max consumption: (W/m) power 4.8 • Dimensions: 10mm x 1000mm (1 Metre) • Beam angle: 120° • Sealed up to IP65 Crystal Resin 	Cool White	5500 -7000K	550	LSCW6241MIP65RS
	White	4000 -4500K	450	LSNW6241MIP65RS
	Warm White	2700 -3200K	400	LSWW6241MIP65RS
	Red	N/A	240	LSR6241MIP65RS
	Blue	N/A	40	LSB6241MIP65RS

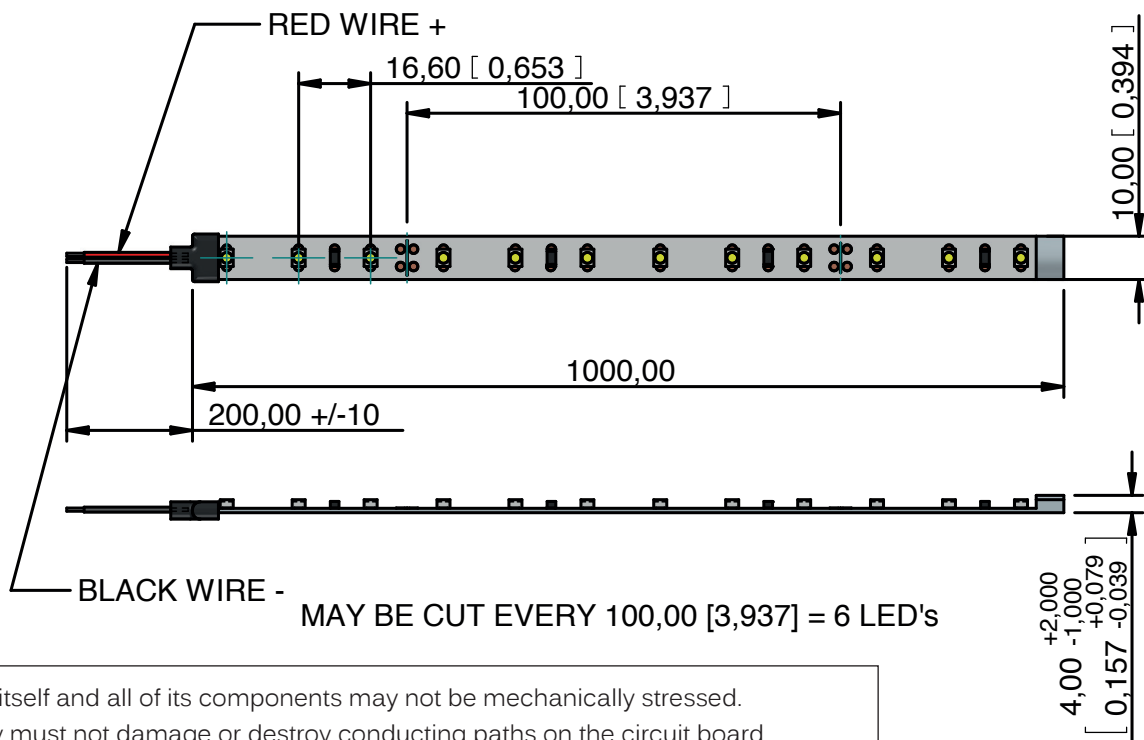

The strip itself and all of its components may not be mechanically stressed. Assembly must not damage or destroy conducting paths on the circuit board. Correct electrical polarity needs to be observed, wrong polarity may destroy the strip. When mounting on a metallic or otherwise conductive surfaces, there needs to be electrical isolation points between strip and the mounting surface. Caution needs to be taken after cutting the strip that exposed ends are insulated.