

Reset button with 1 push button

In a IP65 enclosure

R-Button / 42 1NO M12(4)
with M12 connection
4-pole
1 button (1 NO contact)

Delivery contents: Flat lens, transparent clear, red, yellow, green, blue Label plates, O, I, R


[Link to Product](#)

Illustration

stay connected



Male

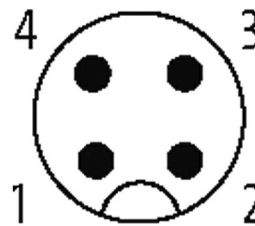


PIN 1: N/O 1

PIN 2: n.c.

PIN 3: n.c.

PIN 4: N/O 1

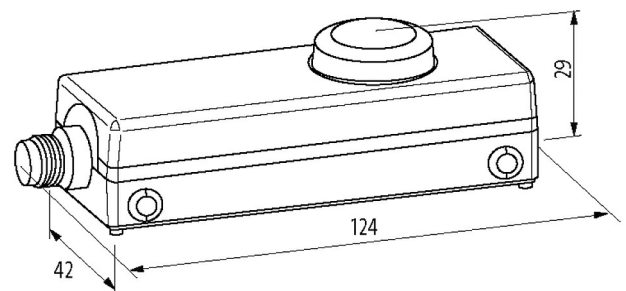

Product may differ from Image

Components approvals

Emergency-Stop button	UR
Housing	UR

Contact Layout

PIN 1	N/O 1
PIN 2	n.c.
PIN 3	n.c.
PIN 4	N/O 1

Utilization category

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 12/19

AC-15	1.5 A (240 V AC)
-------	------------------

DC-13	2 A (24 V DC)
-------	---------------

Technical Data

Switching capacity	15 A (AC 15); 2.2 A (DC 13)
--------------------	-----------------------------

Contact bounce time	max. 10 ms
---------------------	------------

General data

Mech./ elect. life	1 000 000 operations, load-temperature dependent
--------------------	--

Material (contact)	Ag Ni
--------------------	-------

Protection	IP65
------------	------

Connection	M12 (4-pole)
------------	--------------

Mounting method	with clip on back
-----------------	-------------------

Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
-------------------	---

Dimensions H×W×D	29×124×42 mm
------------------	--------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85365080
-----------------------	----------

EAN	4048879594288
-----	---------------

eClass	27371244
--------	----------

Packaging unit	1
----------------	---