

### **Reset button with 2 illuminated push buttons**

Every 1 NO contact in a IP65 enclosure

R-Button / 42 2NO L M12(8)

with M12 connection

8-pole




2 buttons can be lit (each 1 NO contact)

Delivery contents: Flat lens, transparent clear, red, yellow, green, blue Label plates, O, I, R, ↑, ↓

### **[Link to Product](#)**

**Illustration**

stay connected

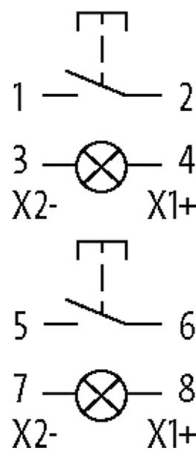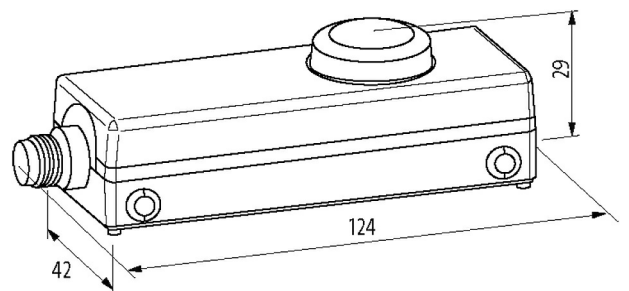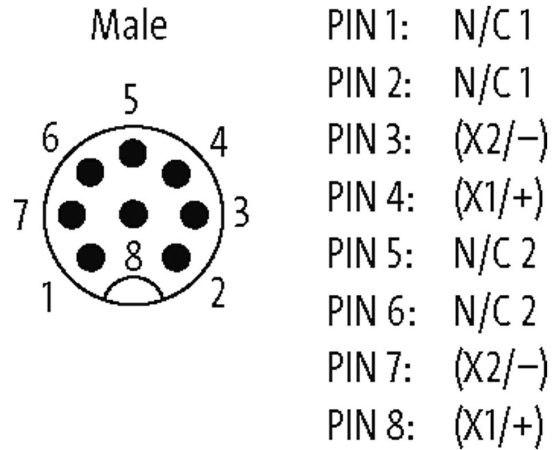

Product may differ from Image

**Components approvals**

Emergency-Stop button UR

Housing UR

**Contact Layout**

PIN 1	N/C 1
PIN 2	N/C 1
PIN 3	(X2/-)
PIN 4	(X1/+)
PIN 5	N/C 2
PIN 6	N/C 2
PIN 7	(X2/-)
PIN 8	(X1/+)

**Technical Data**

Operating voltage	1...36 V DC (UR: 30 V DC)
Operating current	1.5 A
LED Light	max. 30 V AC/DC typ. 14 mA (24 V DC)
Contact bounce time	max. 10 ms

**General data**

Mech./ elect. life	1 000 000 operations, load-temperature dependent
Material (contact)	Ag Ni
Protection	IP65
Connection	M12 (8-pole)
Mounting method	with clip on back
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Dimensions H×W×D	29×124×42 mm

**Commercial data**

country of origin	DE
customs tariff number	85365080
EAN	4048879594325
eClass	27371244
Packaging unit	1