


ENGLISH

Datasheet

RS Pro 3304 Series 3.5mm Pitch Straight PCB Terminal Block with Push In Termination, PCB Mount, 4 Way

RS Stock No: 874-5455

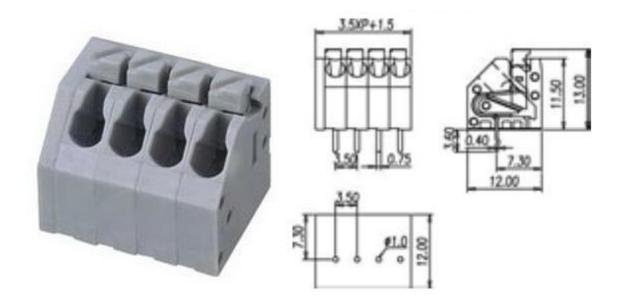

Product Details

RS Pro 4-way straight PCB terminal block comes with push in termination. This screwless PCB terminal block has a 3.5 mm pitch and a 300 V 2 A electrical ratings. The PCB terminal block features screwless cage clamp terminals that accept a wire size of 28 to 16 AWG.





Specifications:

| opeomeaner. | |
|-------------------------------|-------------------------|
| Body Orientation | Straight |
| Colour | Grey |
| Current Rating | 7 A (UL), 8 A (IEC) |
| Depth | 12.9 mm |
| Gender | Female |
| Length | 15.5 mm |
| Material | Nylon 66 |
| Mounting Type | PCB |
| Number of Contacts | 4 |
| Number of Rows | 1 |
| Pitch | 3.5 mm |
| Termination Method | Push In |
| Туре | PCB Terminal Block |
| Voltage Rating | 300 V (UL), 450 V (IEC) |
| Width | 12.1 mm |
| American Wire Gauge | 16 to 26 AWG |
| Insulation Withstands Voltage | 2000 V ac |
| Operating Temperature Range | -40 to +105°C |
| Insulation Resistance | 500 mΩ |
| Flammability Rating | UL 94 V-0 |
| | |
| | |