



Datasheet

ENGLISH

RS Pro Brass Sight Glass Non Return Valve, 1 in BSP

RS Stock No: 720-9349



Product Description

For monitoring the right operation of a steam trap to avoid leakage of live steam and consequently big energy losses, a sight glass is recommended to be installed downstream of the steam trap.


Single window SW sight glass, has been designed for this particular application.

Connections are female screwed.

USE: Condensate pipes downstream steam traps.
AVAILABLE MODELS: SW 12 - 5 mm thick glass
SIZES: DN ½", ¾" and DN 1"
CONNECTIONS: Female screwed ISO 7/1Rp(BS21).
INSTALLATION: Horizontal or vertical installation. See IMI, installation and maintenance instructions.

PMO – Max.operating pressure: 12 bar
 TMO – Max.operating temperature: 150 °C

Pos. Num.	Designation	Material
1	Body	Brass EN12165
2	Glass Nut	Brass EN12165
3	*Gasket	St. Steel / Graphite
4	*Window Glass	Borosilicate

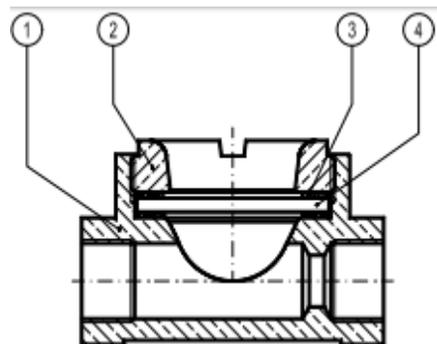

Dimensions (MM)					
SIZE	A	B	C	D	WGT. Kgs
1"	88	23	62	60	0.85

