




# Data sheet

## PS

ENGLISH

RS Stock No. 896-8399

RS Stock No. 896-8399

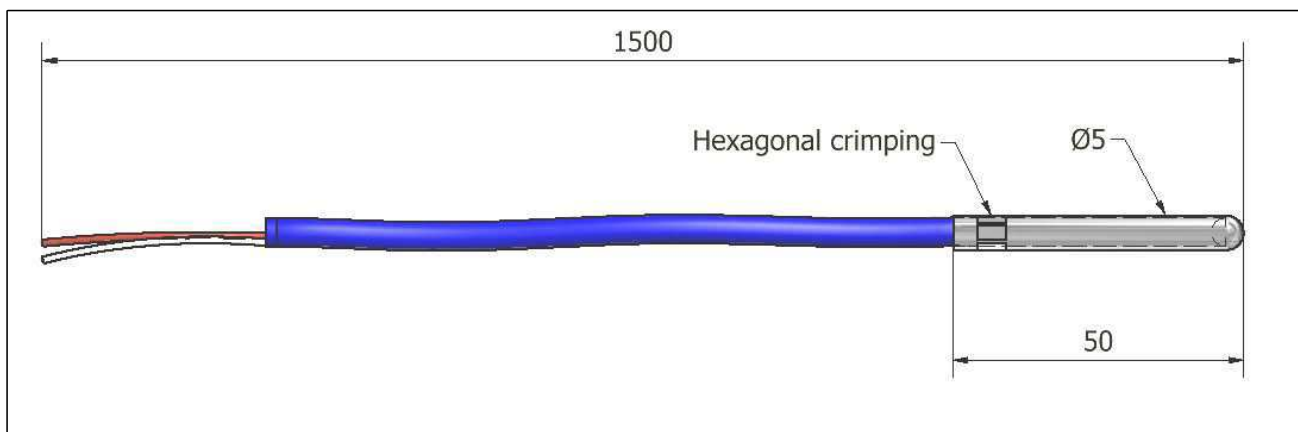

RTD  $\varnothing 5 \times 50$  . Pt1000 . 2 wires . Length 1.5m

**RANGE :**

-20°C / +100°C

**USE :**

Universal

**KEY POINT :**

Flexible

**SPECIFICATIONS:**

PT1000 $\Omega$  thermic element A Class – 1x2 wires  
Tip protector in SS304L  
Cable 2 conductors, isolated PVC/PVC  
Hexagonal crimping

**DIMENSIONS:**

Tip protector length = 50mm  
Tip protector diameter = 5mm  
Total length (tip + cable) = 1500mm

**METROLOGICAL DATA :**

As per IEC 751  
Standard tolerance PT1000 A class :  $\pm 0.15 + 0.002 \cdot [t^{\circ}c]$