



Datasheet

RS PRO USB A M – Serial Adapter - Black


Stock number: 186-0518

EN

The RS PRO USB A male to serial adapter has a black PVC jacket and connector hoods. The cable flex has copper wire conductors and drain wire, with an aluminium braid and foil shielding.

The connectors are nickel and have a strain relief to help avoid the cable splitting around the edge of the boot.

USB to serial adapters are use to convert a standard USB port on the host computer to a 9 pin serial port on the device.

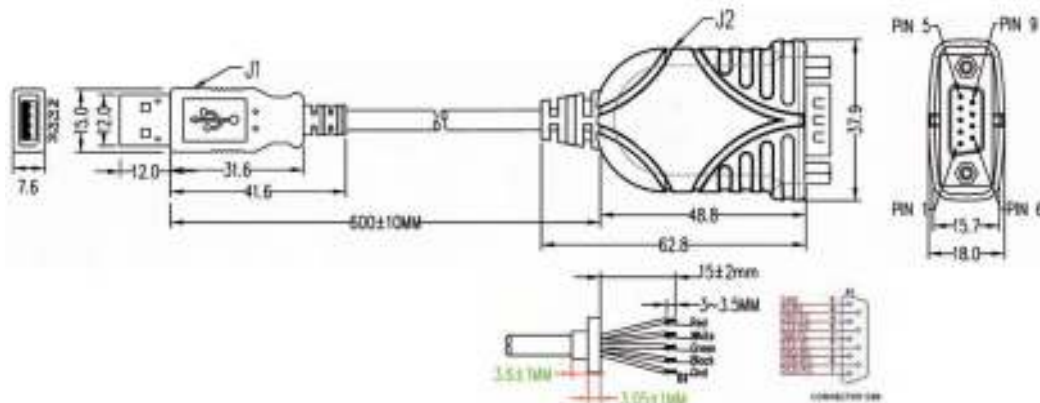

J1	PCB
1	RED
2	WHITE
3	GREEN
4	BLACK
SHELL	BRAID

1. WIRE: UL2725 28AWG 1PRS+26AWG 2C AEB OD=4.2MM
JACKET COLOR:BLACK
2. CONN: J1-4P USB CONN.(SERIES A) PLUG MD TYPE
J2-DB9P MALE ASSY TYPE(INSIDE W/AP1100R1 PCB)
W/PLASTIC HOOD(COLOR:BLACK)
INNER SHIELD:W/PLASTIC HOOD SHIELDING
INSULATOR COLOR:BLACK
3. USB & DB9P MOLDING COLOR:BLACK

RoHS / REACH / CE

