


Infeed left Connection main circuit: screw terminal 3 slots for compact load feeders Connection terminal maximum 25 mm² / 35 mm²

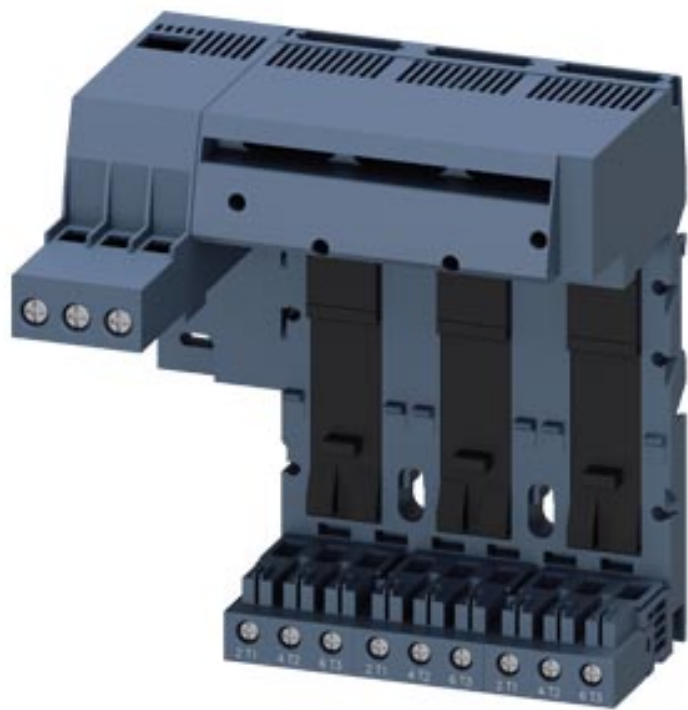

General technical data		
Product brand name		SIRIUS
Product designation		infeed left
Protection class IP		IP20
Degree of pollution		3
Number of slots for compact feeder		3
Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operation	°C	-20 ... +60
Vibration resistance		f = 4 to 5.8 Hz; d = 15 mm; f = 5.8 to 500 Hz; a = 2 m / s ² 10 cycles
Shock resistance		Semi-sinusoidal a = 6 m/s ² at 10 ms; 3 pos. and 3 neg. Shock in all axes
Reference code acc. to DIN EN 61346-2		W
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		W

Main circuit		
Operating current at AC at 400 V rated value	A	63
Operating voltage at AC-3 rated value maximum	V	690
Installation/ mounting/ dimensions		
Mounting type		screw and snap-on mounting
Width	mm	180
Height	mm	197
Depth	mm	144
Connections/ Terminals		
Type of electrical connection for main current circuit		screw-type terminals
Design of screw-type connection for main contacts		M3
Wire stripping length for main contacts	mm	13
Tightening torque for main contacts with screw-type terminals	N·m	3 ... 4.5
Connectable conductor cross-section for supply for main contacts using the upper clamping point		
• solid	mm ²	2.5 ... 35
• stranded	mm ²	2.5 ... 35
• finely stranded with core end processing	mm ²	2.5 ... 25
• finely stranded without core end processing	mm ²	2.5 ... 25
Connectable conductor cross-section for supply for main contacts using the lower clamping point		
• solid	mm ²	2.5 ... 35
• stranded	mm ²	2.5 ... 35
• finely stranded with core end processing	mm ²	2.5 ... 25
• finely stranded without core end processing	mm ²	2.5 ... 25
Connectable conductor cross-section for supply for main contacts using both clamping points		
• solid	mm ²	2 ... 25
• stranded	mm ²	2 ... 25
• finely stranded with core end processing	mm ²	2 ... 16
• finely stranded without core end processing	mm ²	2 ... 16
AWG number as coded connectable conductor cross section for supply for main contacts		
• using the upper clamping point		12 ... 2
• using the lower clamping point		12 ... 2
• using both clamping points		16 ... 2
Type of connectable conductor cross-sections for supply for main contacts using the upper clamping point		
• solid		2.5 ... 35 mm ²
• stranded		2.5 ... 35 mm ²

• finely stranded with core end processing • finely stranded without core end processing		2.5 ... 25 mm ² 2.5 ... 25 mm ²
Type of connectable conductor cross-sections for supply for main contacts using the lower clamping point • solid • stranded • finely stranded with core end processing • finely stranded without core end processing		2.5 ... 35 mm ² 2.5 ... 35 mm ² 2.5 ... 25 mm ² 2,5 ... 25 mm ²
Type of connectable conductor cross-sections for supply for main contacts using both clamping points • solid • stranded • finely stranded with core end processing • finely stranded without core end processing		2 x (2.5 ... 25 mm ²) 2 x (2.5 ... 25 mm ²) 2 x (2.5 ... 16 mm ²) 2 x (2.5 ... 16 mm ²)
Type of connectable conductor cross-sections at AWG conductors for supply for main contacts • using the upper clamping point • using the lower clamping point • using both clamping points		12 ... 2 12 ... 2 2 x (16 ... 2)
Connectable conductor cross-section for main contacts for load-side outgoing feeder • solid • stranded • finely stranded with core end processing	mm ² mm ² mm ²	1.5 ... 10 1.5 ... 10 1.5 ... 6
AWG number as coded connectable conductor cross section for main contacts for load-side outgoing feeder		14 ... 8
Type of connectable conductor cross-sections for main contacts for load-side outgoing feeder • solid • stranded • finely stranded with core end processing		2x (1.5 ... 6 mm ²), 1x (1.5 ... 10 mm ²) 2x (1.5 ... 6 mm ²), 1x (1.5 ... 10 mm ²) 2 x (1.5 ... 6) mm ²
Type of connectable conductor cross-sections at AWG conductors for main contacts for load-side outgoing feeder		2 x (16 ... 10), 1 x (16 ... 8)

Certificates/ approvals



General Product Approval			EMC	Declaration of Conformity	
					Miscellaneous
CSA	UL		RCM	EG-Konf.	

Test Certificates	Shipping Approval				
Type Test Certificates/Test Report					
	ABS	BUREAU VERITAS	LRS	PRS	RINA

Shipping Approval	other
	Confirmation
RMRS	

Safety related data	
Protection against electrical shock	finger-safe

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6812-8AB
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6812-8AB
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RA6812-8AB
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6812-8AB&lang=en

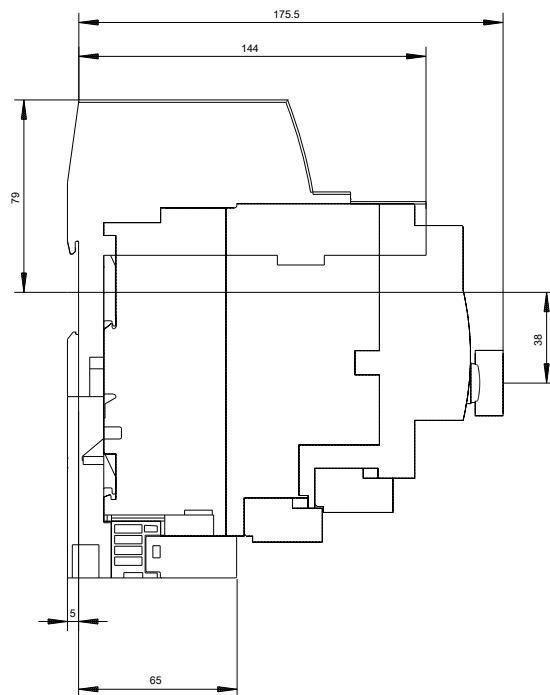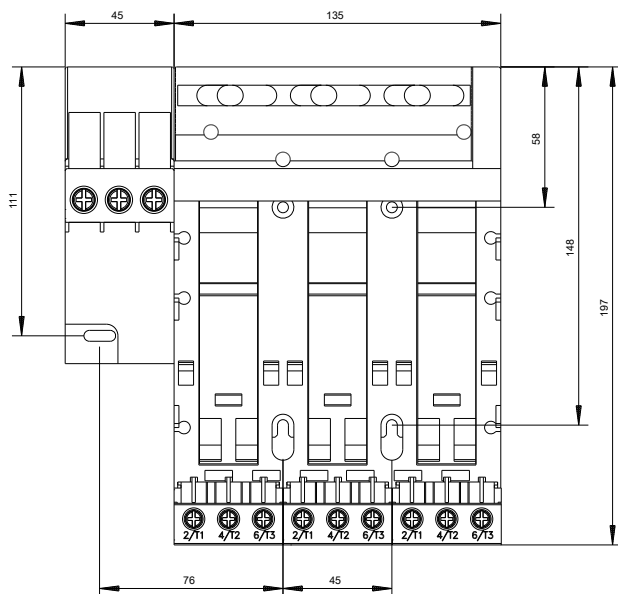

last modified:

03/08/2020