

Circuit breaker size S00 for motor protection, CLASS 10 A-release 0.11...0.16 A N-release 2.1 A Screw terminal Standard switching capacity



| | |
|--------------------------|----------------------|
| Product brand name | SIRIUS |
| Product designation | Circuit breaker |
| Design of the product | For motor protection |
| Product type designation | 3RV1 |

| General technical data | |
|---|-------|
| Size of the circuit-breaker | S00 |
| Size of contactor can be combined company-specific | S00 |
| Product extension | Yes |
| <ul style="list-style-type: none"> Auxiliary switch | Yes |
| Power loss [W] for rated value of the current | |
| <ul style="list-style-type: none"> at AC in hot operating state | 5.5 W |
| <ul style="list-style-type: none"> at AC in hot operating state per pole | 1.8 W |
| Insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| Surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| <ul style="list-style-type: none"> in networks with grounded star point between main and auxiliary circuit | 400 V |

| | |
|---|-------------------|
| <ul style="list-style-type: none"> in networks with grounded star point between main and auxiliary circuit | 400 V |
| Protection class IP | |
| <ul style="list-style-type: none"> on the front | IP20 |
| <ul style="list-style-type: none"> of the terminal | IP00 |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> of the main contacts typical | 100 000 |
| <ul style="list-style-type: none"> of auxiliary contacts typical | 100 000 |
| Electrical endurance (switching cycles) | |
| <ul style="list-style-type: none"> typical | 100 000 |
| Type of protection according to ATEX directive 2014/34/EU | Ex II (2) GD |
| Certificate of suitability according to ATEX directive 2014/34/EU | DMT 02 ATEX F 001 |
| Reference code acc. to DIN EN 81346-2 | Q |

Ambient conditions

| | |
|--|----------------|
| Installation altitude at height above sea level | |
| <ul style="list-style-type: none"> maximum | 2 000 m |
| Ambient temperature | |
| <ul style="list-style-type: none"> during operation | -20 ... +60 °C |
| <ul style="list-style-type: none"> during storage | -50 ... +80 °C |
| <ul style="list-style-type: none"> during transport | -50 ... +80 °C |
| Temperature compensation | -20 ... +60 °C |
| Relative humidity during operation | 10 ... 95 % |

Main circuit

| | |
|---|------------------------------|
| Number of poles for main current circuit | 3 |
| Adjustable pick-up value current of the current-dependent overload release | 0.11 ... 0.16 A |
| Operating voltage | |
| <ul style="list-style-type: none"> rated value | 690 V |
| <ul style="list-style-type: none"> at AC-3 rated value maximum | 690 V |
| Operating frequency rated value | 50 ... 60 Hz |
| Operating current rated value | 0.16 A |
| Operating current | |
| <ul style="list-style-type: none"> at AC-3 <ul style="list-style-type: none"> at 400 V rated value | 0.16 A |
| Operating power | |
| <ul style="list-style-type: none"> at AC-3 <ul style="list-style-type: none"> at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value | 25 W 40 W 60 W 60 W |

| | |
|--|--|
| Operating frequency | |
| <ul style="list-style-type: none"> • at AC-3 maximum | 15 1/h |
| Auxiliary circuit | |
| Number of CO contacts | |
| <ul style="list-style-type: none"> • for auxiliary contacts | 0 |
| Protective and monitoring functions | |
| Product function | |
| <ul style="list-style-type: none"> • Ground fault detection | No |
| <ul style="list-style-type: none"> • Phase failure detection | Yes |
| Trip class | CLASS 10 |
| Design of the overload release | thermal |
| Operational short-circuit current breaking capacity (Ics) at AC | |
| <ul style="list-style-type: none"> • at 240 V rated value | 100 000 A |
| <ul style="list-style-type: none"> • at 400 V rated value | 100 000 A |
| <ul style="list-style-type: none"> • at 500 V rated value | 100 000 A |
| <ul style="list-style-type: none"> • at 690 V rated value | 100 000 A |
| Maximum short-circuit current breaking capacity (Icu) | |
| <ul style="list-style-type: none"> • at AC at 240 V rated value | 100 kA |
| <ul style="list-style-type: none"> • at AC at 400 V rated value | 100 kA |
| <ul style="list-style-type: none"> • at AC at 500 V rated value | 100 kA |
| <ul style="list-style-type: none"> • at AC at 690 V rated value | 100 kA |
| Response value current | |
| <ul style="list-style-type: none"> • of instantaneous short-circuit trip unit | 2.1 A |
| UL/CSA ratings | |
| Full-load current (FLA) for three-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value | 0.16 A |
| <ul style="list-style-type: none"> • at 600 V rated value | 0.16 A |
| Short-circuit protection | |
| Product function Short circuit protection | Yes |
| Design of the short-circuit trip | magnetic |
| Design of the fuse link for IT network for short-circuit protection of the main circuit | |
| <ul style="list-style-type: none"> • at 240 V | none required |
| <ul style="list-style-type: none"> • at 400 V | None required |
| <ul style="list-style-type: none"> • at 500 V | None required |
| <ul style="list-style-type: none"> • at 690 V | None required |
| Installation/ mounting/ dimensions | |
| Mounting position | any |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |

| | |
|---|-------|
| Height | 90 mm |
| Width | 45 mm |
| Depth | 75 mm |
| Required spacing | |
| <ul style="list-style-type: none"> • for grounded parts at 400 V <ul style="list-style-type: none"> — downwards 20 mm — upwards 20 mm — Backwards 0 mm — at the side 9 mm — forwards 0 mm • for live parts at 400 V <ul style="list-style-type: none"> — downwards 20 mm — upwards 20 mm — Backwards 0 mm — at the side 9 mm — forwards 0 mm • for grounded parts at 500 V <ul style="list-style-type: none"> — downwards 20 mm — upwards 20 mm — Backwards 0 mm — at the side 9 mm — forwards 0 mm • for live parts at 500 V <ul style="list-style-type: none"> — downwards 20 mm — upwards 20 mm — Backwards 0 mm — at the side 9 mm — forwards 0 mm • for grounded parts at 690 V <ul style="list-style-type: none"> — downwards 20 mm — upwards 20 mm — Backwards 0 mm — at the side 9 mm — forwards 0 mm • for live parts at 690 V <ul style="list-style-type: none"> — downwards 20 mm — upwards 20 mm — Backwards 0 mm — at the side 9 mm | |

Connections/ Terminals

Product function

| | |
|---|---|
| <ul style="list-style-type: none"> removable terminal for auxiliary and control circuit | No |
| Type of electrical connection <ul style="list-style-type: none"> for main current circuit | screw-type terminals |
| Arrangement of electrical connectors for main current circuit | Top and bottom |
| Type of connectable conductor cross-sections <ul style="list-style-type: none"> for main contacts <ul style="list-style-type: none"> single or multi-stranded finely stranded with core end processing | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²), 2x (1 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| Type of connectable conductor cross-sections <ul style="list-style-type: none"> for auxiliary contacts <ul style="list-style-type: none"> single or multi-stranded | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| Tightening torque <ul style="list-style-type: none"> for main contacts with screw-type terminals for auxiliary contacts with screw-type terminals | 0.8 ... 1.2 N·m 0.8 ... 1.2 N·m |
| Size of the screwdriver tip | Pozidriv 2 |
| Design of the thread of the connection screw <ul style="list-style-type: none"> for main contacts | M3 |

Safety related data

| | |
|---|---------------|
| B10 value <ul style="list-style-type: none"> with high demand rate acc. to SN 31920 | 5 000 |
| Proportion of dangerous failures <ul style="list-style-type: none"> with low demand rate acc. to SN 31920 with high demand rate acc. to SN 31920 | 50 % 50 % |
| Failure rate [FIT] <ul style="list-style-type: none"> with low demand rate acc. to SN 31920 | 50 FIT |
| Display version <ul style="list-style-type: none"> for switching status | Rocker switch |

Certificates/ approvals

| | |
|--------------------------|--------------------------------|
| General Product Approval | For use in hazardous locations |
|--------------------------|--------------------------------|



| | | |
|---------------------------|-------------------|-------------------|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|



[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



| | |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[Confirmation](#)

[Miscellaneous](#)

| | |
|-------|---------|
| other | Railway |
|-------|---------|



[Special Test Certificate](#)

| |
|---------------------|
| Further information |
|---------------------|

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1011-0AA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1011-0AA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1011-0AA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1011-0AA10&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1011-0AA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV1011-0AA10&objecttype=14&gridview=view1>

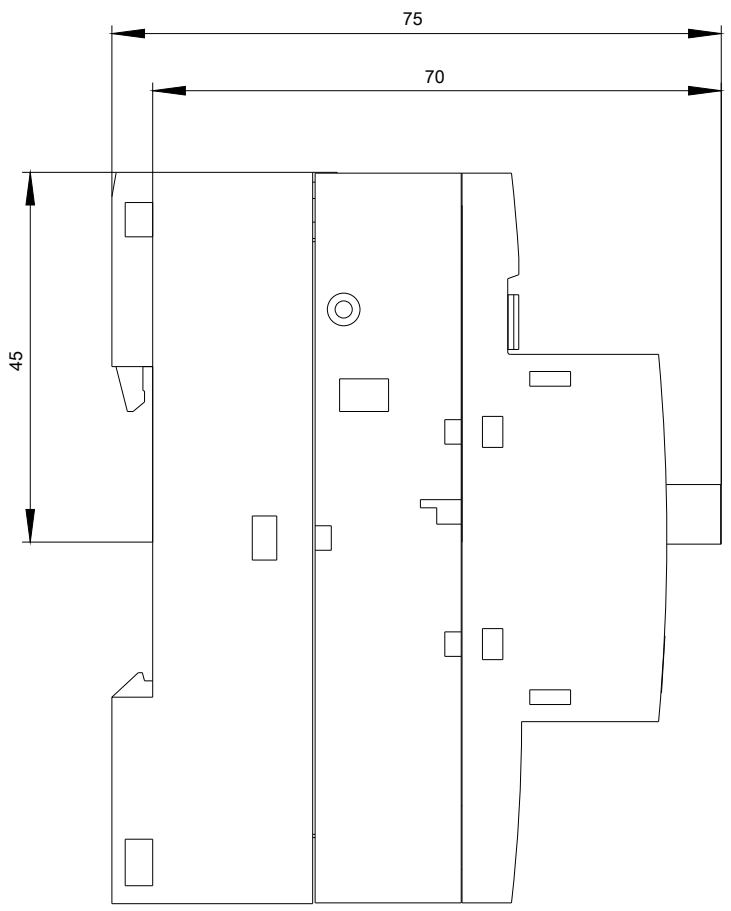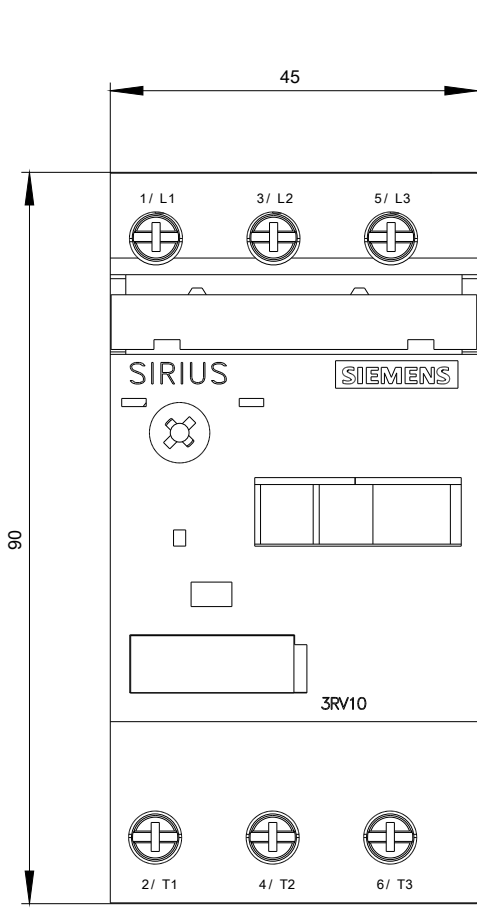



last modified:

03/05/2020