


accessory for VL150XUL, VL250UL (CG frame FG frame) Max Flex operator, complete incl. op. mech., lever and Bowden cable (length=0.9m)



## Model

Product brand name SENTRON

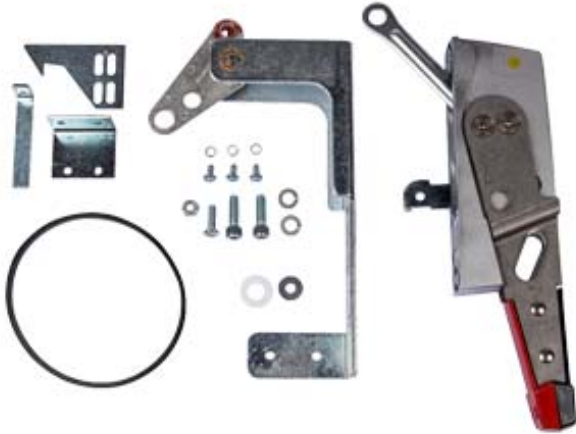



## Accessories




accessories Accessories for...0UL, VL25001

## Mechanical Design

Net weight 0.8 kg

## Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	Shipping Approval
<a href="#">Miscellaneous</a>	 UL	 C-Tick	 EG-Konf.	<a href="#">Special Test Certificate</a> 

Shipping Approval	other
 PRS	 RINA
 RMRS	<a href="#">Miscellaneous</a>
	<a href="#">Environmental Confirmations</a>
	<a href="#">Confirmation</a>

other
<a href="#">Manufacturer Declaration</a>

**Further information**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL9300-3JM01>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3VL9300-3JM01>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VL9300-3JM01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL9300-3JM01)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

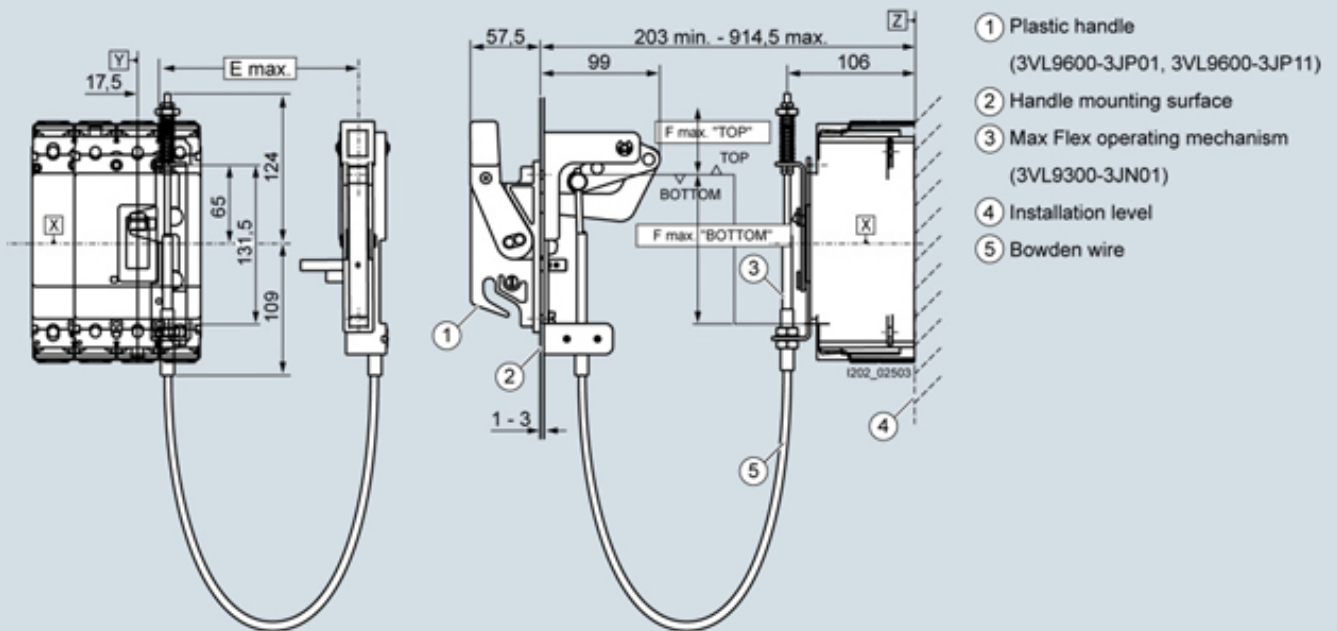

- ① Plastic handle  
(3VL9600-3JP01, 3VL9600-3JP11)
- ② Handle mounting surface
- ③ Max Flex operating mechanism  
(3VL9300-3JN01)
- ④ Installation level
- ⑤ Bowden wire

Cabinet depth mm	E max.		Cabinet depth mm	F max.			
	3VL9300-3JQ31 Length 900 mm	3VL9300-3JQ41 Length 1200 mm		3VL9300-3JQ31 Length 900 mm		3VL9300-3JQ41 Length 1200 mm	
				TOP	BOTTOM	TOP	BOTTOM
203	285	589,5	203	106,5	393,5	406,5	686
254	279,5	584	254	132	381	419	686
305	266,5	579	305	152,5	373,5	432	680
406,5	211	551	406,5	114,5	360,5	419	673
457	165	533,5	457	86,5	325	406,5	647,5
508	89	508	508	15	254	393,5	622,5
609,5	--	439,5	609,5	--	--	355,5	571,5
762	--	259	762	--	--	221	442