

950D SERIES 35mm SINGLE RATIO METAL GEARBOX

(RE 385 MOTOR)



NEW!

RATIOS NOW AVAILABLE AS EX-STOCK ITEMS.

IMPORTANT NOTICE
Due to the wide range of applications for this product it is the users responsibility to establish the products suitability for their individual purpose(s).

- 950D2.51 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 2.5:1
- 950D61 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 6:1
- 950D111 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 11:1
- 950D501 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 50:1
- 950D1001 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 100:1
- 950D1481 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 148:1
- 950D5001 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 500:1
- 950D8101 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 810:1
- 950D30001 (4.5v - 15v) WITH RE 385 MOTOR. RATIO 3000:1

Designed for heavy-duty industrial and model applications this robust unit boasts a powerful high quality, five pole motor with sintered bronze bearings. The metal gearbox incorporates sleeved bearings, enabling the high torque transfer from the motor to be transmitted through the gearbox. The unit is mounted on a 1mm thick plated steel bracket.

MOTOR DATA. (RE-385)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	TORQUE	
			R.P.M.	A	R.P.M.	A	oz - in	g - cm	W	%	oz - in	g - cm
RE - 385	6.0 - 15.0	12v CONSTANT	11000	0.155	9281	0.837		65.3	6.21	61.85		417.6

REDUCTION TABLE. R.P.M.

SUPPLY VOLTAGE	4.5v	6.0v	9.0v	12.0v	15.0v
950D2.51	1890	2520	3375	5040	6300
950D61	787	1050	1575	2100	2625
950D111	429	572	858	1145	1430
950D501	94	126	189	252	315
950D1001	41	55	83	110	138
950D1481	32	42	64	85	106
950D5001	8	11	17	22	28
950D8101	5	7	11	15	18
950D30001	1.5	2	3	4	5

WEIGHT	
950D2.51	146g
950D61	144g
950D111	146g
950D501	156g
950D1481	162g
950D8101	164g
950D30001	168g

RATED TOLERANCE TORQUE (g.cm)		MAX MOMENTARY TOLERANCE TORQUE
2.5:1	2000	6000
6:1	3000	9000
11:1	3000	9000
50:1	3000	9000
100:1	6000	18000
148:1	6000	18000
500:1	6000	18000
810:1	6000	18000
3000:1	6000	18000

GEARBOX RATINGS


24 volt versions are available for this range of motor-gearboxes. Performance data is similar to 12 volt versions. This version also has an extended 10mm rear shaft to accommodate motor encoders. When ordering please use 12v version part number suffixed with 24V. I.E. 950D111 will be 950D11124V

NOTE: To establish Torque Rating in nM, divide g.cm by 10,197.0

950D SERIES 35mm SINGLE RATIO METAL GEARBOX

(RE 385 MOTOR)

GEARBOX DIMENSIONS

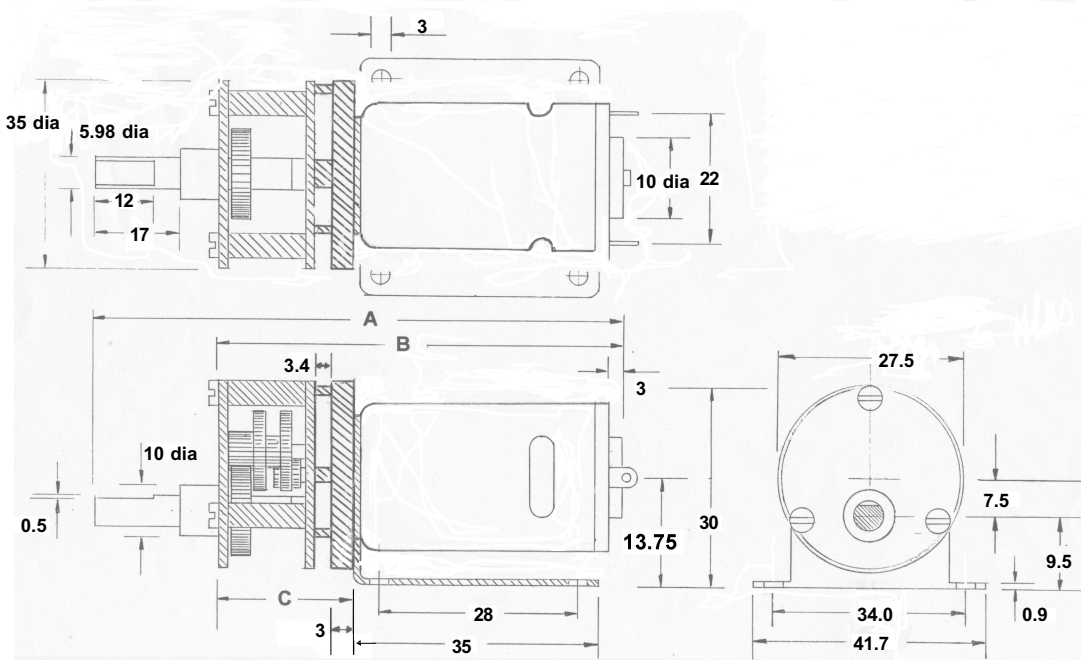

GEARBOX REF.	A	B	C
950D2.5:1	85	60	19
950D6:1 (6:1)	85	60	19
950D11:1 (11:1)	85	60	19
950D50:1 (50:1)	90	65	24
950D100:1 (100:1)	90	65	24
950D148:1 (148:1)	92	67	26
950D500:1 (500:1)	95	70	29
950D810:1 (810:1)	95	70	29
950D3000:1	102	74	31

FOR ACCESSORIES TO FIT THIS SERIES GEARBOX, REFER TO 919D SERIES PAGE.

Subject to minimum order quantities of 250 units, the following ratios are also available with a six week lead-time. The physical dimensions of these other gearboxes may vary from the data as illustrated above. Details of individual gearboxes are available upon request.

GEARBOX 18:1 WITH 385 MOTOR.
 GEARBOX 70:1 WITH 385 MOTOR.
 GEARBOX 100:1 WITH 385 MOTOR
 GEARBOX 200:1 WITH 385 MOTOR
 GEARBOX 350:1 WITH 385 MOTOR
 GEARBOX 500:1 WITH 385 MOTOR
 GEARBOX 900:1 WITH 385 MOTOR
 GEARBOX 3000:1 WITH 385 MOTOR

GEARBOX 30:1 WITH 385 MOTOR.
 GEARBOX 75:1 WITH 385 MOTOR.
 GEARBOX 120:1 WITH 385 MOTOR
 GEARBOX 250:1 WITH 385 MOTOR
 GEARBOX 400:1 WITH 385 MOTOR
 GEARBOX 600:1 WITH 385 MOTOR
 GEARBOX 1000:1 WITH 385 MOTOR

GEARBOX 60:1 WITH 385 MOTOR
 GEARBOX 90:1 WITH 385 MOTOR.
 GEARBOX 180:1 WITH 385 MOTOR
 GEARBOX 300:1 WITH 385 MOTOR
 GEARBOX 450:1 WITH 385 MOTOR
 GEARBOX 700:1 WITH 385 MOTOR
 GEARBOX 1500:1 WITH 385 MOTOR