




Datasheet  
Stock No. 190-2923  
**RS PRO LED ILLUMINATED WARNING  
LIGHT BAR IP612VDC 7 RED 12VDC**

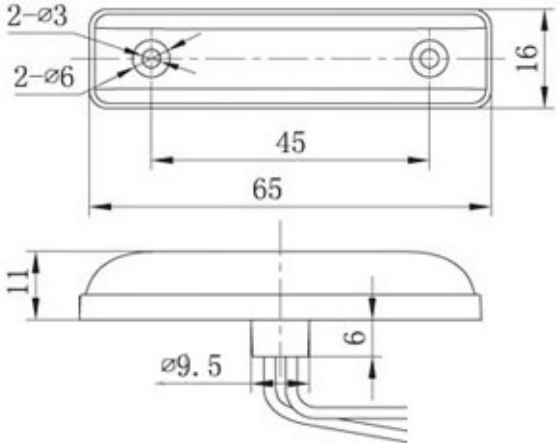


ENGLISH



<b>BODY</b>	<b>PPMA &amp; ABS</b>
<b>LUMINOUS SOURCE</b>	<b>N° 4 LED</b>
<b>AVAILABLE COLOURS</b>	
<b>VOLTAGE</b>	<b>12 Vdc</b>
<b>OPERATION</b>	<b>∞</b>
<b>CURRENT CONSUMPTION</b>	<b>33mA @ 12Vdc</b>
<b>LIGHT EFFECT</b>	<b>Steady</b>

These data are disclosed only for information purposes. RS Components reserves the right to modify them at any time without prior notice.

<p><b>IP RATING</b></p>	<p><b>IP67</b></p>
<p><b>OPERATING TEMPERATURE</b></p>	<p><b>-40°C +65°C</b></p>
<p><b>CERTIFICATIONS, APPROVALS</b></p>	<p><b>CE &amp; E-marked</b></p>
<p><b>MOUNTING</b></p>	<p><b>2 Screw fixing</b></p>
<p><b>TECHNICAL DRAWING</b></p>	 <p>The technical drawing shows two views of a rectangular component. The top view is a perspective drawing of a rounded rectangle with a total length of 65 and a width of 16. It features two mounting holes on the left side, each with a diameter of 6 (2-ø6), and two smaller holes on the right side, each with a diameter of 3 (2-ø3). The distance between the centers of the two mounting holes is 45. The bottom view is a side profile showing a rounded top with a height of 11. It features a cable entry point with a diameter of 9.5 (ø9.5) and a distance of 6 from the right edge to the center of the cable entry.</p>