


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0901481104](#)
Status: **Active**
Overview: [C-Grid Connector Products](#)
Description: 2.54mm Pitch C-Grid PC Board Connector, Single Row, Right-Angle, 1.00µm Tin (Sn), 4 Circuits

Documents:

| | |
|--|--|
| 3D Model | Application Specification 901190001-AS-000 (PDF) |
| Drawing (PDF) | Packaging Specification PK-90148-0001-001 (PDF) |
| Product Specification PS-99020-0001-001 (PDF) | RoHS Certificate of Compliance (PDF) |
| Application Specification 713080001-AS-000 (PDF) | |

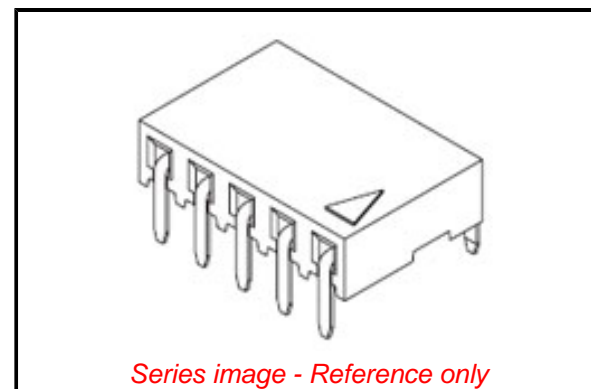

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|---|
| Product Family | PCB Receptacles |
| Series | 90148 |
| Application | Board-to-Board, Signal |
| Overview | C-Grid Connector Products |
| Product Name | C-Grid |
| UPC | 800753533905 |

Physical

| | |
|--------------------------------|-----------------|
| Circuits (Loaded) | 4 |
| Circuits (maximum) | 4 |
| Color - Resin | Black |
| Durability (mating cycles max) | 30 |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | No |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Polyester |
| Net Weight | 0.423/g |
| Number of Rows | 1 |
| Orientation | Right Angle |
| PC Tail Length | 2.90mm |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Tube |
| Pitch - Mating Interface | 2.54mm |
| Pitch - Termination Interface | 2.54mm |
| Plating min - Mating | 1.016µm |
| Plating min - Termination | 1.016µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | No |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -55° to +125°C |
| Termination Interface: Style | Through Hole |

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

| | |
|-----------------|---------------|
| China ROHS | Green Image |
| ELV | Not Relevant |
| RoHS Phthalates | Not Contained |

Search Parts in this Series

[90148 Series](#)

Mates With

C-Grid III Header [90120](#) , [90121](#)

Electrical

| | |
|-------------------------------|------------|
| Current - Maximum per Contact | 3.0A |
| Grounding to PCB | No |
| Voltage - Maximum | 350V AC/DC |

Solder Process Data

| | |
|--|------|
| Duration at Max. Process Temperature (seconds) | 003 |
| Lead-free Process Capability | WAVE |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 235 |

Material Info**Reference - Drawing Numbers**

| | |
|---------------------------|------------------------------------|
| Application Specification | 713080001-AS-000, 901190001-AS-000 |
| Packaging Specification | PK-90148-0001-001 |
| Product Specification | PS-99020-0001-001 |
| Sales Drawing | SDA-90148-001 |

This document was generated on 02/22/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION