

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0003091125](#)  
**Status:** **Active**  
**Overview:** Standard .093" Pin and Socket Connectors  
**Description:** 2.36mm Diameter Standard .093" Pin and Socket Receptacle Housing, 12 Circuits, 3 Rows, Natural

**Documents:**

|  |   |
|--|---|
| <a href="#">3D Model</a>                             | <a href="#">Product Specification PS-43660-9999-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                        | <a href="#">Packaging Specification PK-1360-001 (PDF)</a>     |
| <a href="#">3D Model (PDF)</a>                       | <a href="#">RoHS Certificate of Compliance (PDF)</a>          |
| <a href="#">Product Specification PS-02-09 (PDF)</a> |   |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |  |
|----------------|--|
| Product Family | Crimp Housings   |
| Series         | <a href="#">1360</a>   |
| Application    | Power, Wire-to-Wire  |
| Comments       | 12.5A max. can be achieved when housing is used with 42477 or 42478 terminals, 12.5A max. can be achieved when housing is used with 42477 or 42478 terminals |
| Overview       | <a href="#">Standard .093" Pin and Socket Connectors</a>   |
| Product Name   | Standard .093"   |
| UPC            | 800753618831   |

**Physical**

|                               |                |
|-------------------------------|----------------|
| Circuits (maximum)            | 12             |
| Color - Resin                 | Natural        |
| Flammability                  | 94V-2          |
| Gender                        | Receptacle     |
| Glow-Wire Capable             | No             |
| Material - Resin              | Nylon          |
| Net Weight                    | 1.223/g        |
| Number of Rows                | 3              |
| Packaging Type                | Bag            |
| Panel Mount                   | Yes            |
| Pitch - Mating Interface      | 5.03mm         |
| Stackable                     | No             |
| Temperature Range - Operating | -40° to +105°C |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 9.5A |
|-------------------------------|------|

**Solder Process Data**


|                              |     |
|------------------------------|-----|
| Lead-free Process Capability | N/A |
|------------------------------|-----|

**Material Info**

|                    |         |
|--------------------|---------|
| Engineering Number | 1360-R2 |
|--------------------|---------|

**Reference - Drawing Numbers**

|                         |                             |
|-------------------------|-----------------------------|
| Packaging Specification | PK-1360-001                 |
| Product Specification   | PS-02-09, PS-43660-9999-001 |
| Sales Drawing           | SD-1360-X                   |

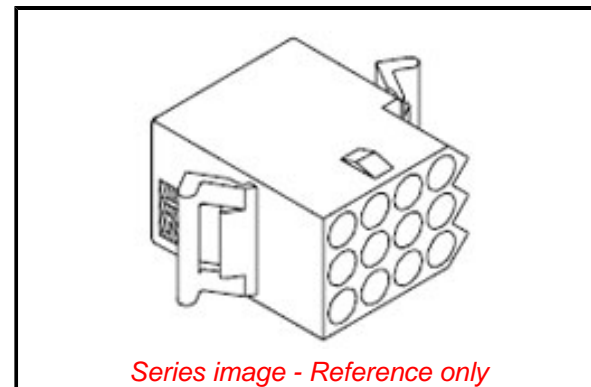

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ECHA\_01\_2020 (16 January 2020)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[1360 Series](#)

**Mates With**

[03092121](#) , [3099](#)

**Use With**

[1189 Crimp Terminals](#), [1190 Crimp Terminals](#), [1376 Male PC Tail Terminals](#), [1380 Female PC Tail Terminals](#), [1377 Female PC Tail Terminals](#), [1380 Male Crimp Terminals](#), [1381 Female Crimp Terminals](#), [1433 Crimp Terminals](#), [1434 Male Crimp Terminals](#), [1973](#)

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**