




Product availability: Stock - Normally stocked in distribution facility

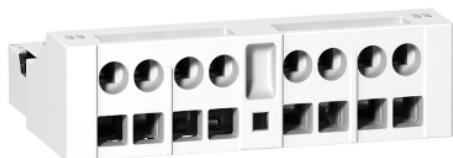

Main

Range	TeSys
Device short name	GVAE
Product or component type	Auxiliary contact block
Product compatibility	GV2L GV2ME GV3L GV2RT GV2P GV3P GV2LE LS1D323
Mounting location	Front side
Pole contact composition	1 NO + 1 NC
Connections - terminals	Spring terminals 2 0.00...0.00 in ² (0.75... 1.5 mm ²)flexible without cable end
Quantity per set	Set of 10

Complementary

[Ui] rated insulation voltage	300 V UL 508 300 V CSA C22.2 No 14 250 V IEC 60947-1
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[Ith] conventional free air thermal current	2.5 A
Protection type	GG fuse 10 A GB2CB06 circuit breaker 10 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Rated operational power in VA	120 VA 110...120 V AC-15 100000 cycles 120 VA 230...240 V AC-15 100000 cycles 48 VA 24 V AC-15 100000 cycles 60 VA 48 V AC-15 100000 cycles
Rated operational power in W	15 W 48 V DC-13 100000 cycles 24 W 24 V DC-13 100000 cycles 9 W 60 V DC-13 100000 cycles
Height	0.51 in (13 mm)
Width	1.75 in (44.5 mm)
Depth	1.24 in (31.5 mm)
Product weight	0.11 lb(US) (0.05 kg)

Environment

Environmental characteristic	Normal environment
------------------------------	--------------------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Ordering and shipping details

Category	22367 - MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	00785901494935
Package weight(Lbs)	0.02 kg (0.04 lb(US))
Returnability	Yes
Country of origin	CZ

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------